



THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT 1	USED ON		MS-3023	A
	MODEL SPP-41416	ASS'Y. NO.		

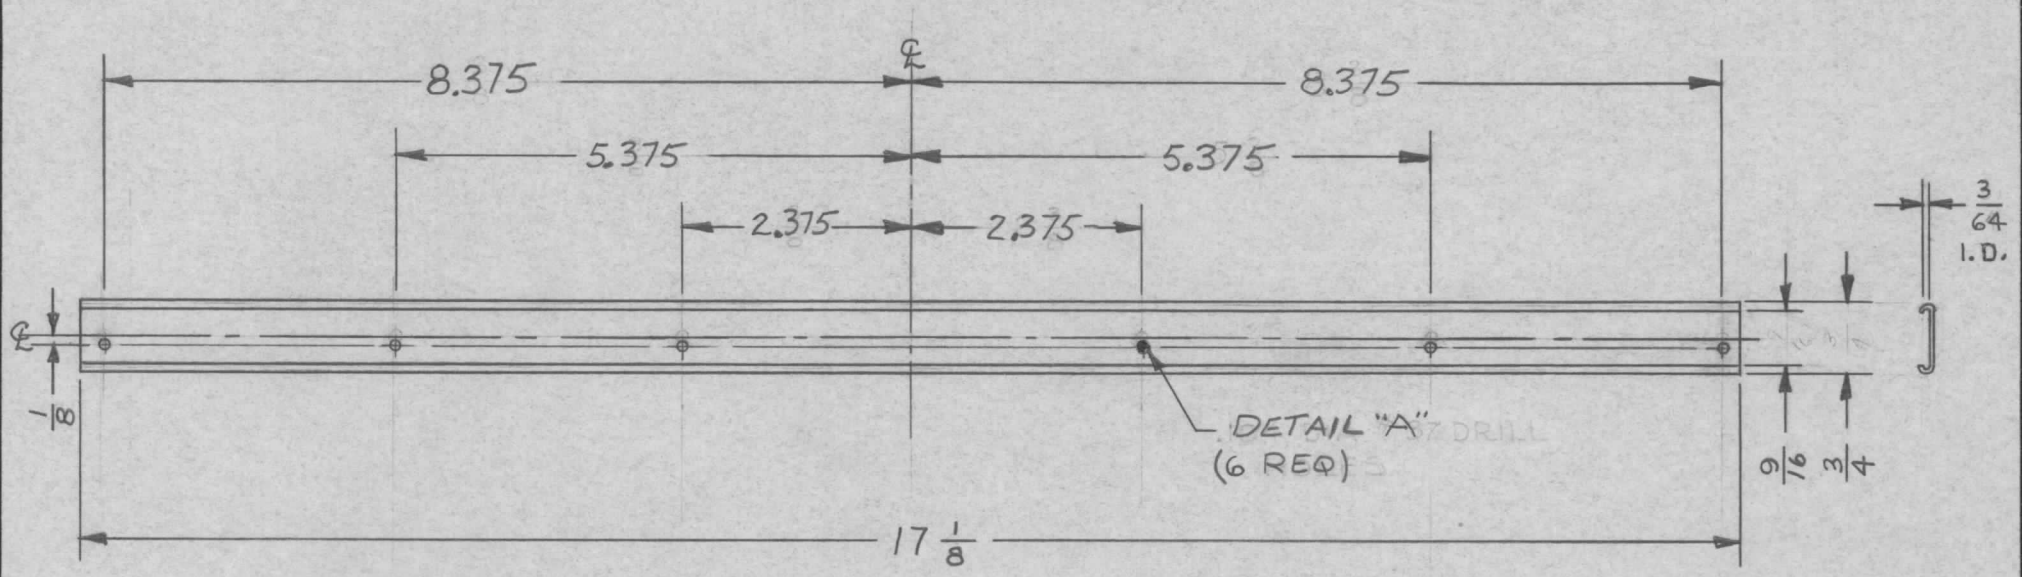

DETAIL "A"  
(6 REQ)

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND INCLUDE  
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIC
.X ± .05		± 1/
.XX ± .01		ANGL
.XXX ± .005		± 0°

FINISH:  
DEGREASE  
S-114 ZINC CHROMATE PRIMER  
S-115 SMOOTH GRAY ENAMEL

MATING PARTS:  
PX 670-17  
PR 104

REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL
		.012	MARTINENGO THE TECHNICAL MATERIEL CORP.		
		STEEL	MAMARONECK, NEW YORK		
A	COMPLETELY REV.	215.68	18763	H.P.	EFM
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°		SCALE:	H		
		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
		MILD		MJTANTILLI	9-24-62
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		SEE NOTE			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
					MS-3023 A