

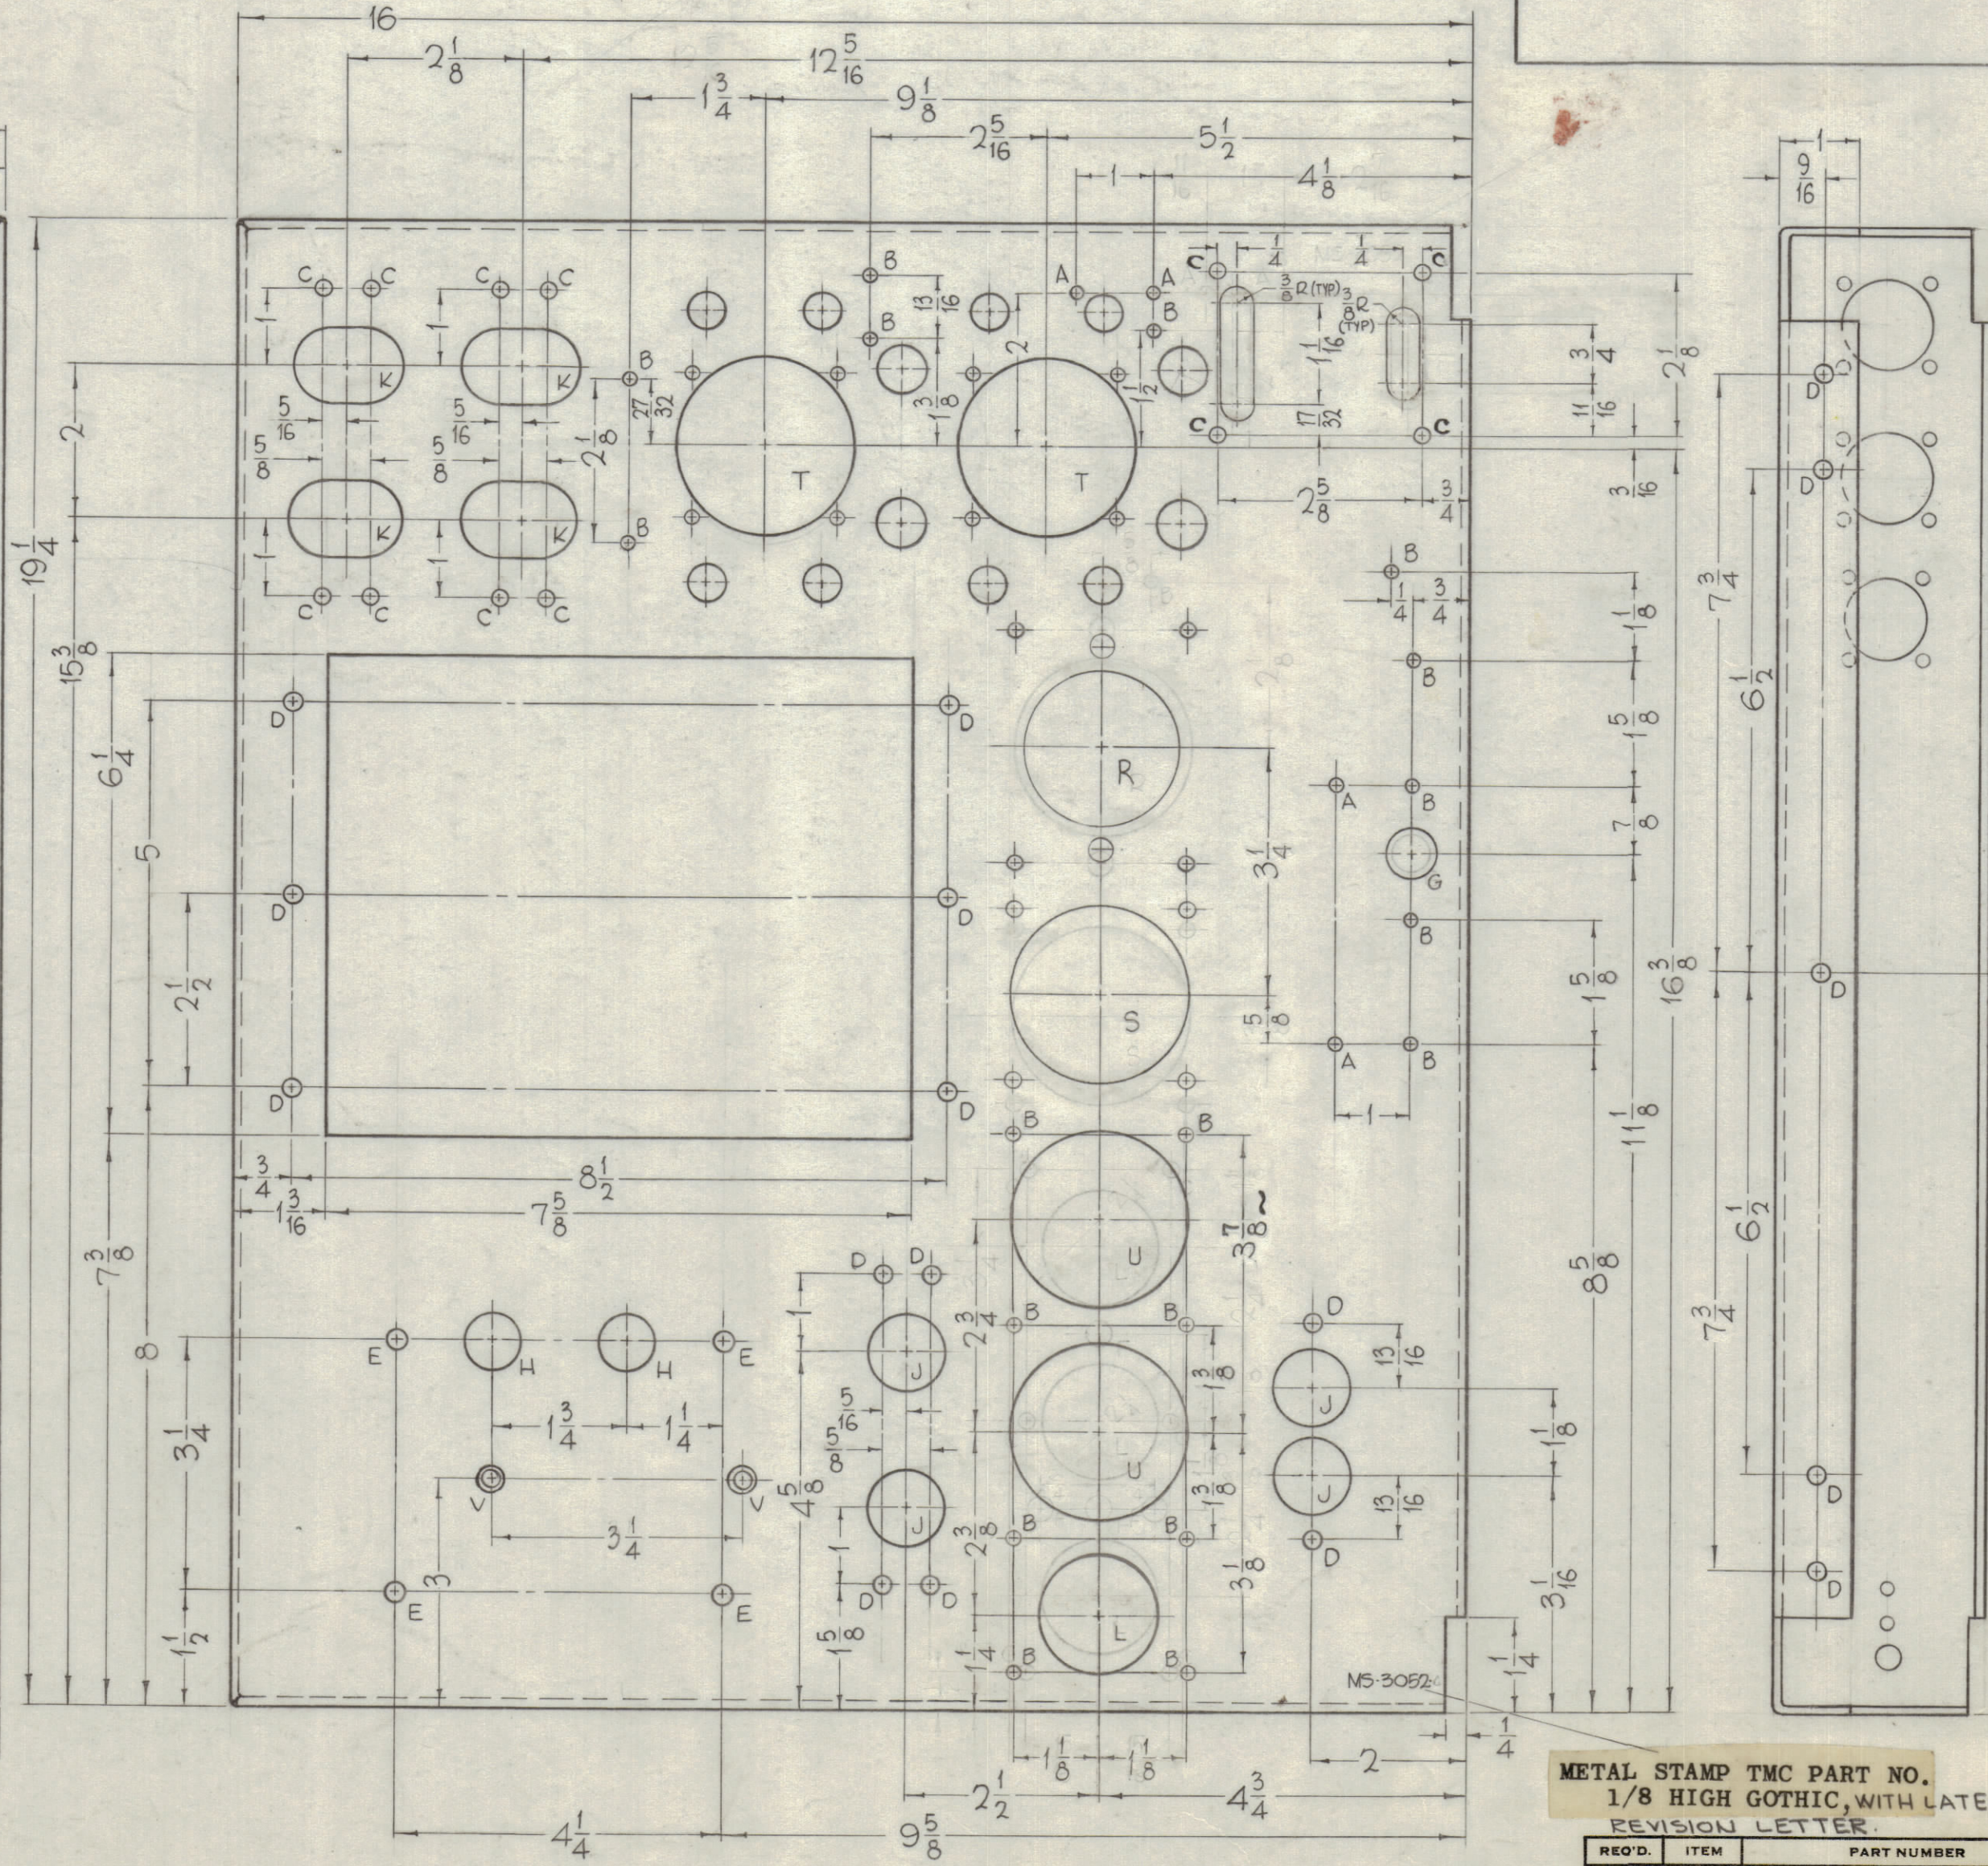


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
	O	ORIGINAL RELEASE FOR PRODUCTION	3-3-64		A.M.	
DA	A	DIM 3 7/8 WAS 4 1/8; METAL STAMP UPDATED	7-14-64	11779		
	B	4" C" HOLES CLARIFIED	4-22-65	13918	W.L.	

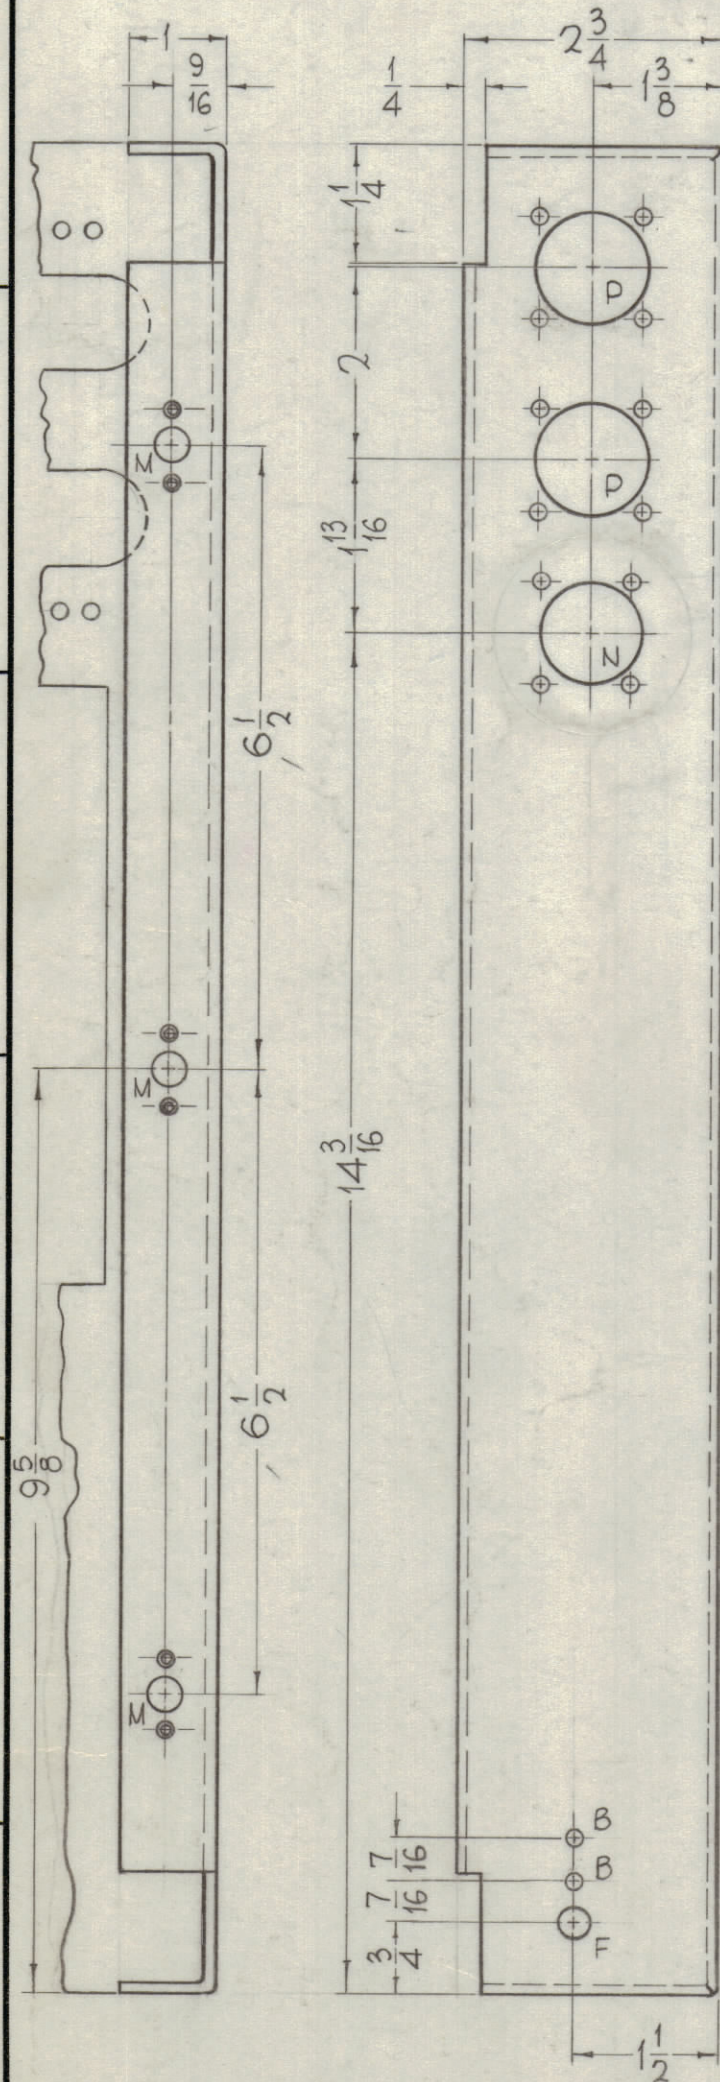


HOLES	REQ.	HOLES	REQ.
A - 9/64 DIA.	4	U - 2-1/4 DIA.	2
B - 11/64 DIA.	20	V - DRILL & C'SK	2
C - 13/64 DIA.	12	10-32 FHS	
D - 15/64 DIA.	27		
E - 17/64 DIA.	4		
F - 5/16 DIA.	1		
G - 5/8 DIA.	1		
H - 3/4 DIA.	2		
J - 1.00 DIA.	4		
K - 1" X 1-1/2 SLOT	4		
L - 1-1/2 DIA.	1		


M- DRILL .104 THRU, C'SK 82° X .204 D. (2 REQ.)

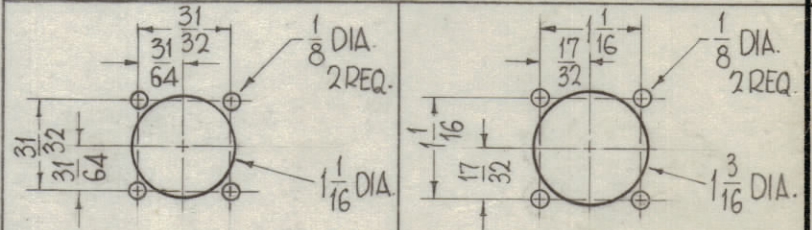

N (1 REQ.) P (2 REQ.)

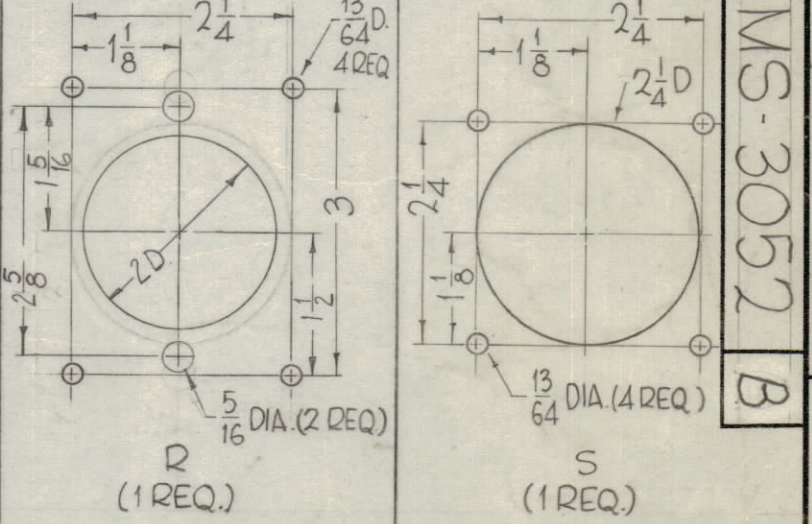

R (1 REQ.) S (1 REQ.)

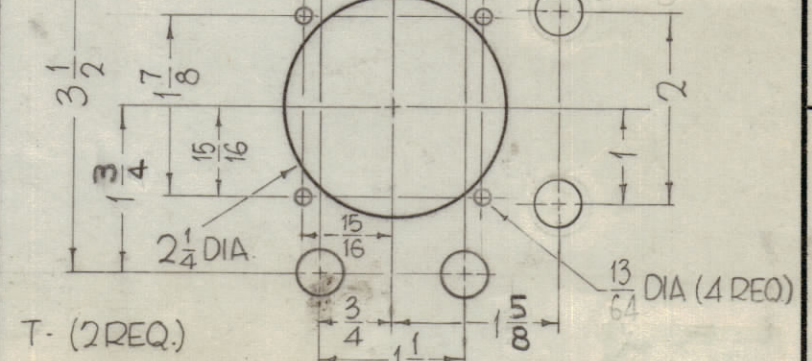

T - (2 REQ.) REF - TMC DWG LD-1167

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
		F. BUDETTI	LIST OF MATERIAL	

MATERIAL 1/8 THICK, ALUMINUM, 5052 H-32		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH S404-IRIDITE, 14-2 AL-COAT		TITLE CHASSIS, COMPONENT MTG	
QTY./UNIT 2	MODEL USED ON GPT-200K	AP-108	
SCALE 1/2" = 1"	CODE A		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN John C. Biele	DATE 7/9/63
DECIMALS .XX ± .01 .XXX ± .005		CHECKED 808	DATE 2/12/64
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES. 808	DATE 2/12/64
TOLERANCES ± 0° 30'		MECH. DES. W.L.	DATE 2/12/64
		FINAL APPROVAL W.L.	
		DATE 2/12/64	
		SHEET MS-3052	
		REV. LTR. B	

NOTES

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES.

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.