
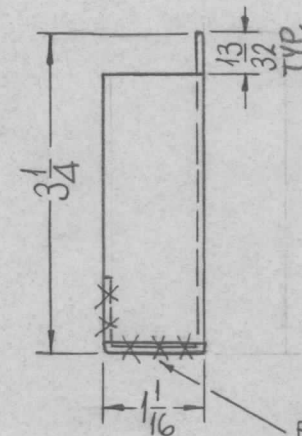


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			MS3221	Ø
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K		4-1-65		

HOLES:
13/64 DIA. (4REQ.)

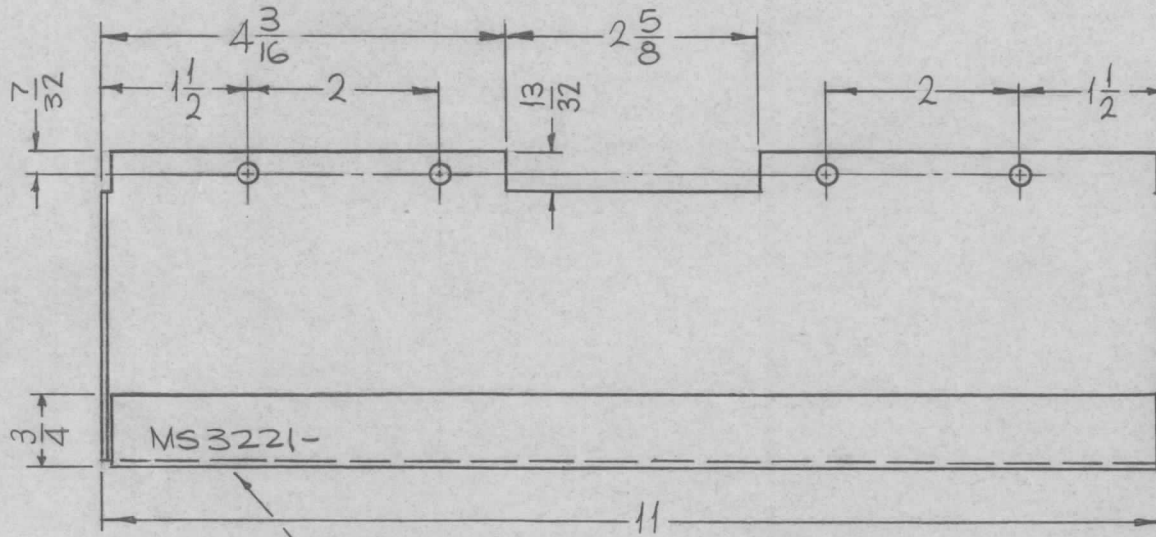

BRAZE BOTH SIDES.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL	
			.031 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			STOCK SIZE				
			ALUMINUM			SHIELD, INTERLOCKS, PA.	
			MATERIAL				
			5052-H32	SRG	<i>[Signature]</i>	<i>[Signature]</i>	
			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
			S404 YEL. IRIDITE		<i>[Signature]</i>	<i>[Signature]</i>	MS3221
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		Ø

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE 1/2:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	TOLERANCES	CODE A			