

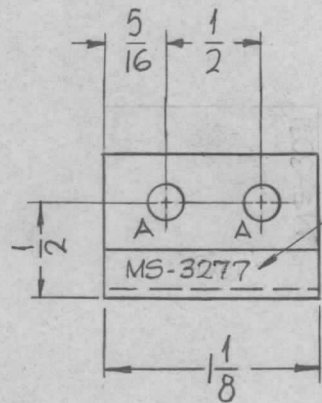



REQ. PER UNIT	USED ON			MS-3277	O
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K(AT-105)	A-2766	3-18-64		
1	GPT-200K(AT-105)	A-2765	3-18-64		



METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.



HOLES -
A - 3/16 DIA. (2 REQ.)
B - 1/4 DIA. (1 REQ.)
C - SEE DETAIL



UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
							.062 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
							STOCK SIZE					
O	ORIGINAL RELEASE FOR PRODUCTION	4/27/64					ALUMINUM				BRACKET, PANEL MOUNTING	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1" = 1"				5052 H-32		SRG	aa	RJC	
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
							5-404 YELLOW IRIDITE				MS-3277 O	
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

TOLERANCES

FRACTIONS
± 1/64
ANGLES
± 0° 30'

CODE
A

ELEC. DES. APP. MECH. DES. APP.