

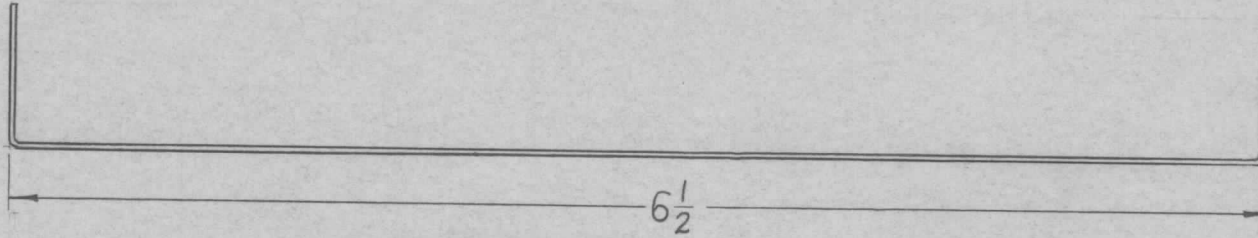


HOLES:  
A-15/64 DIA. (2REQ.)

REQ. PER UNIT	USED ON			MS-3279 Ø
	MODEL	ASS'Y. NO.	DATE	
4	GPT-200K	AX-392	9-23-63	

METAL STAMP TMC PART NO.  
1/8 HIGH GOTHIC.  
WITH LATEST REVISION LETTER



UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

							REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
								.030 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
								STOCK SIZE				
○	ORIGINAL RELEASE FOR PRODUCTION	5/21/64	0	A.M.				COPPER		STRAP, CONNECTOR, ELECTRICAL		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					1"=1"		SOFT	SRG	aa gcb	RR
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
			A					S245 SILVER PLATE		of 13	aa 1/3/64	MS-3279 Ø
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		