

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

USED ON

MODEL

ASS'Y. NO.

DATE

2

GPT-200K

AZ-101


7-13-63

MS-3302

A

HOLES REQ

A-.144 DIA. C'SK 82° 3
TO .284 DIA.

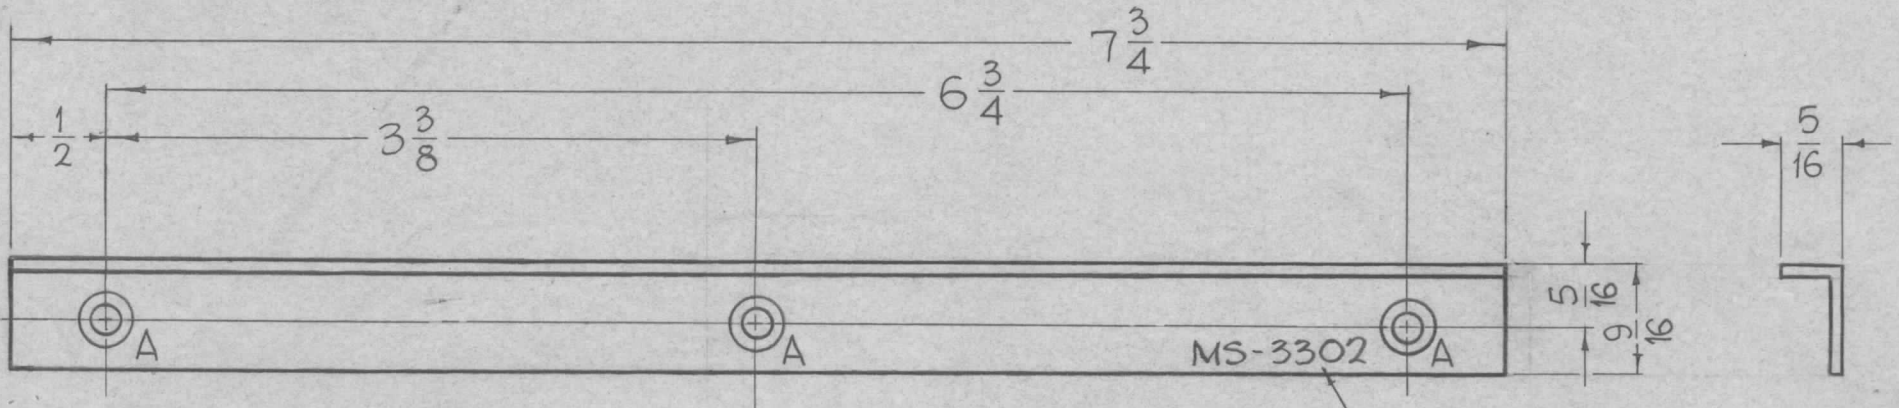

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC. W/LATEST REV. LETTER

							REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL
							.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
							STOCK SIZE		BRACKET, CHASSIS MTG.		
							ALUMINUM				
							MATERIAL				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
A	A' HOLES WERE 1/64	7/29/65	14560	WV	JCB						
O	ORIGINAL RELEASE FOR PRODUCTION	4/6/64									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE									
		1" = 1"									
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A							
TOLERANCES							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							S404-IRIDITE, 14-2AL-COAT		JCB	JCB	MS-3302 A
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		