



REQ. PER UNIT	USED ON			MS-3341	B
	MODEL	ASS'Y. NO.	DATE		
48	GPT-200K AS-123	AX-447	9-2-63		
24	GPT-200K AS-123	AX-448	9-2-63		

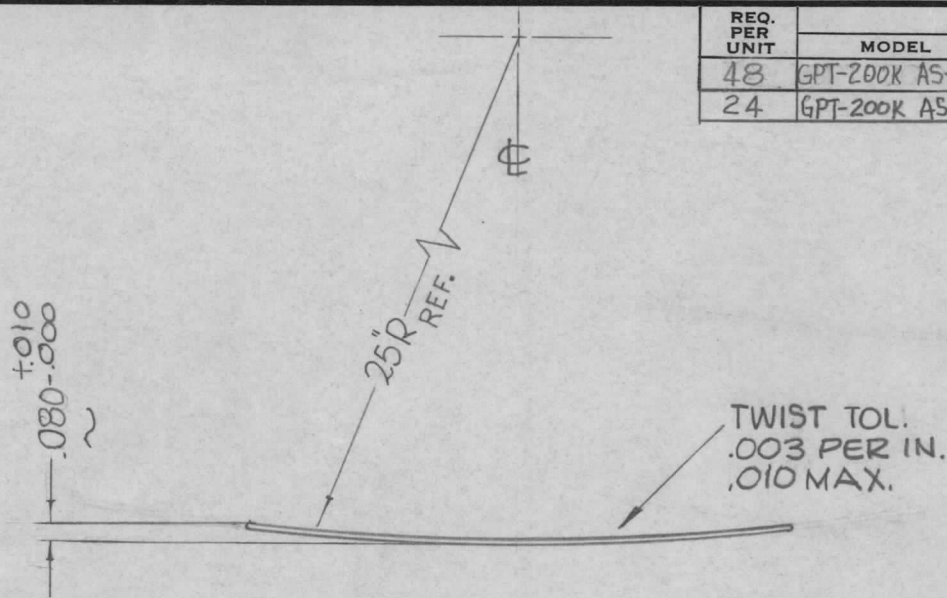

HOLES REQ.
A - .218 DIA. 2

- NOTES:
- 1-SPRING TO BE BENT AFTER DRILLING
 - 2-ALL EDGES, BUFFED ROUND.
 - 3-HOLD AT 600°F FOR 3 HOURS LET AIR COOL.
 - 4-FINISH- S245-SILVER PLATE, BRIGHT S423-IRIDITE, 18P SILVER KOTE
 - 4- ALL EDGES, BUFFED ROUND

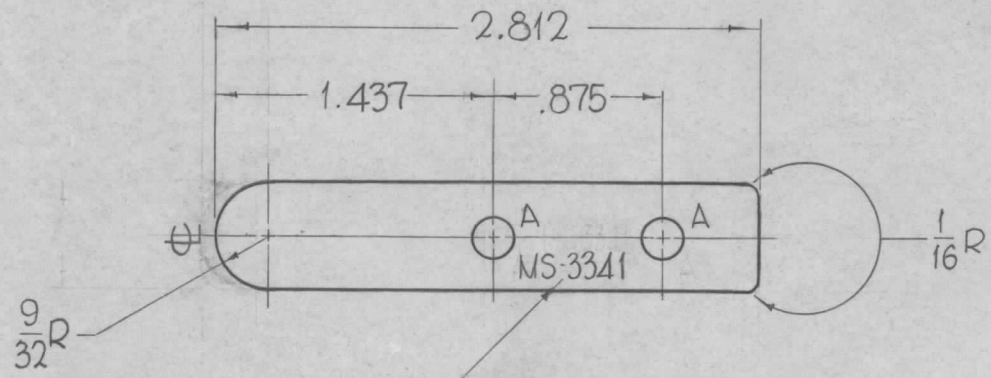

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
								.040 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	SPRING, PRESSURE, T-1	
								STOCK SIZE				
B	ORIG. RELEASE FOR PROD.	5-18-64		SRG				COPPER				
A	NOTES RE-ARRANGED NOTE 3 ADDED	5-12-64		SRG								
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1" = 1"					BERYLUUM		John C. Biele	QA JB	RC
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
	TOLERANCES						SEE NOTES					
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS-3341 B	