REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-3518	0
1	GPT-200K	AS-124	9-27-63		

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

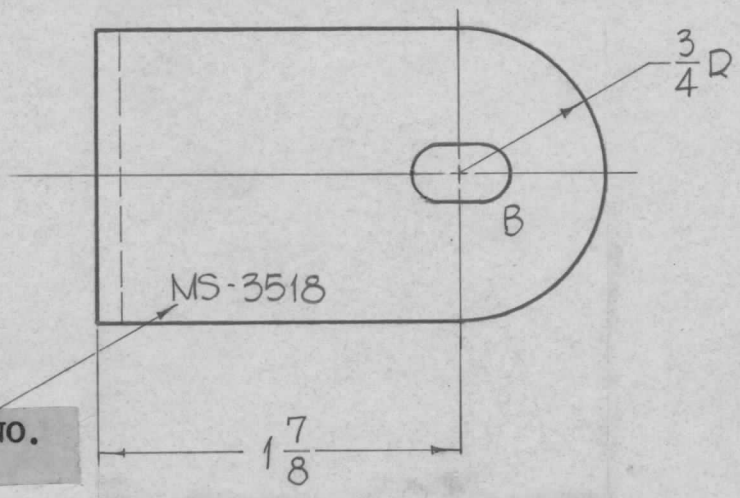

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.

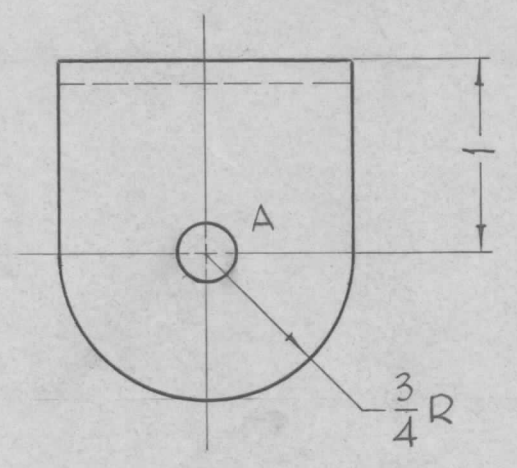

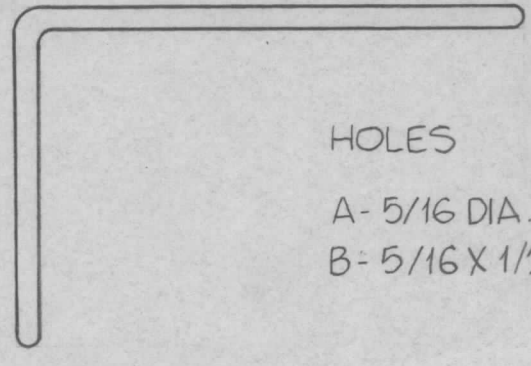

HOLES	REQ.
A - 5/16 DIA.	1
B - 5/16 X 1/2 SLOT	1

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIG. RELEASE FOR PROD.	5-16-64		SRG		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1" = 1"

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			F. BUDETTI	

1/8 THICK — STOCK SIZE

COPPER — MATERIAL

HOT ROLLED — TYPE & TEMPER

S-245-SILVER PLATE — FINISH & SPEC. NO.

HEAT TREAT. SPEC.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CONNECTION, ELECTRICAL H.V.

DRAWN	CHECKED	FINAL APPROVAL
John C. Biele	aa	RJC

ELEC. DES. APP.	MECH. DES. APP.		
9/3	11/3/64	MS-3518	0

STOCK NO. 440H