


REQ. PER UNIT	USED ON			MS-3521 B
	MODEL	ASS'Y. NO.	DATE	
2	GPT-200K	AX-395	10-2-63	

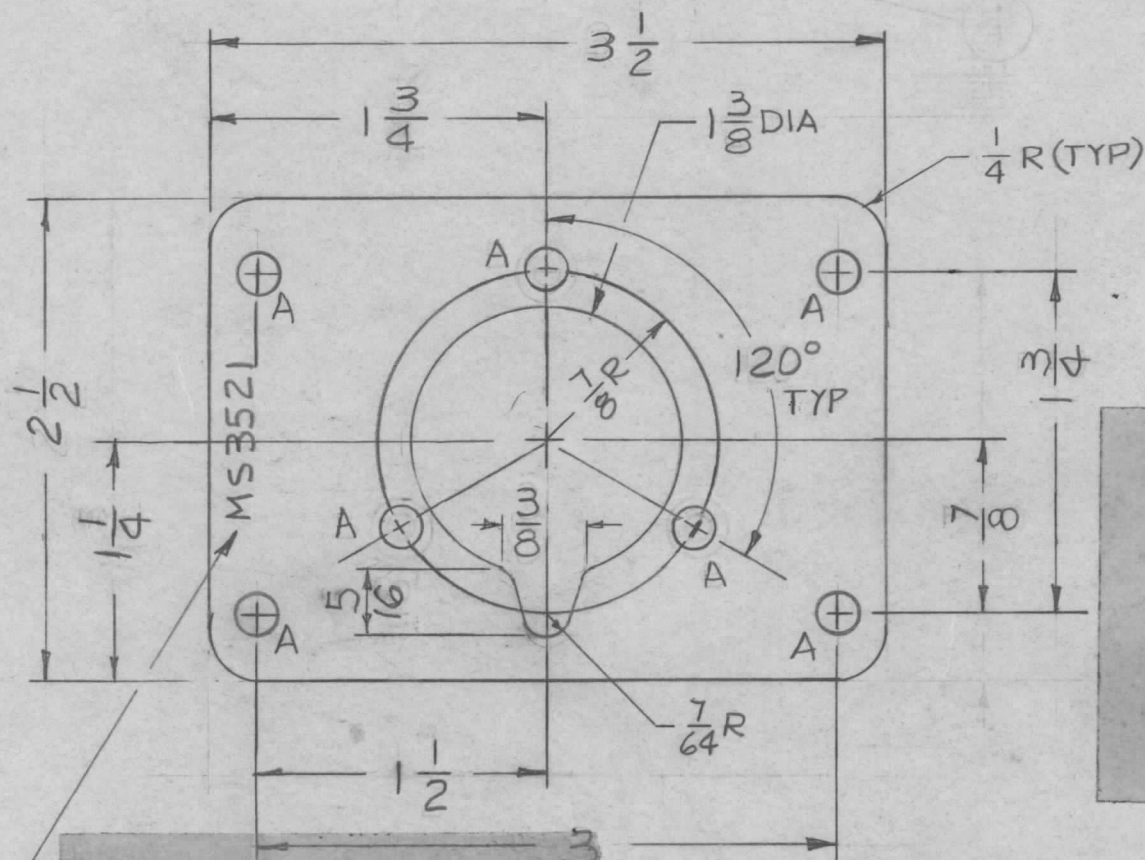

HOLES
A-13/64
E-221-224

REQ'D.
7

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC, WITH
LATEST REVISION LETTER

LD-1365
REF TMC DWG LD-1364

3 1 DELETED							AUT. ROUND, SWAGE TYPE		
REQ. ITEM	PART NO.		F. BUDETTI			DESCRIPTION		SYMBOL	
B	IT.1 (NT129-832-4) DELE; "A" HOLES WERE "B" (3PL)		4.15.65	13822	J.L.	JCB	.081 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
A	DIM 1/4 WAS 1 3/4		7.28.64	11949	J.L.	SRG	STOCK SIZE		
O	ORIGINAL RELEASE		5.18.64		J.L.B.		ALUMINUM		
SYM	DESCRIPTION		DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	PLATE, METERING CIRCUIT MTG	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE		5052, H-32				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		A TURSI aa Rpt		
TOLERANCES			SCALE		TYPE & TEMPER		HEAT TREAT. SPEC.		
					S-245 SILVER PLATE BRIGHT		DRAWN		
					FINISH & SPEC. NO.		CHECKED		
							FINAL APPROVAL		
							ELEC. DES. APP. MECH. DES. APP.		
							MS-3521 B		