

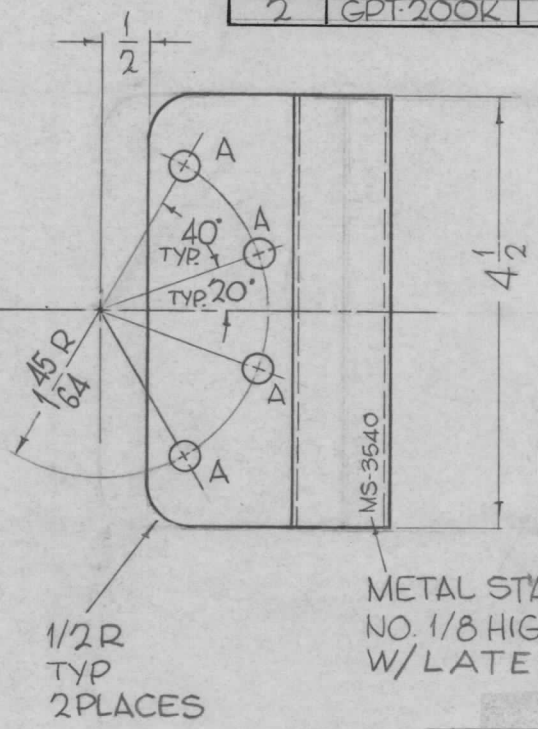


REQ. PER UNIT	USED ON			MS-3540	Ø
	MODEL	ASS'Y. NO.	DATE		
2	GPT-200K	AX-393	12-27-63		

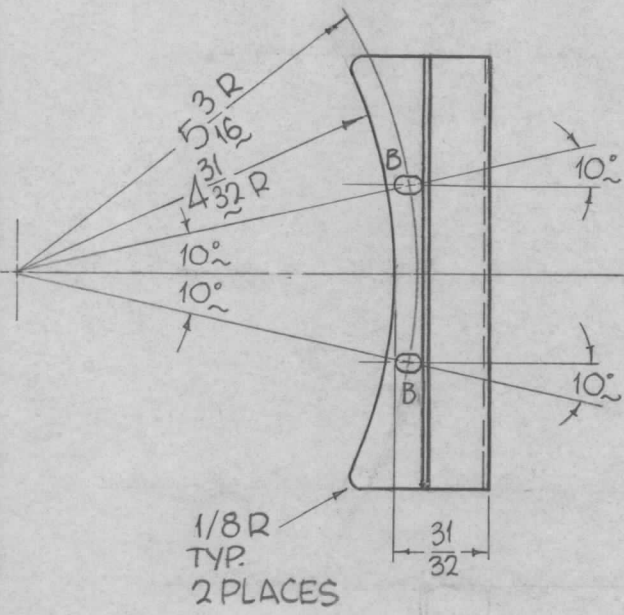

HOLES	REQ
A-5/16 DIA.	4
B-3/16 X 5/16 SLOTS	2

METAL STAMP TMC
NO. 1/8 HIGH GOTHIC
W/LATEST REVISION

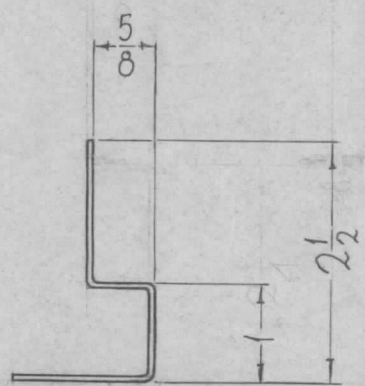

- UNLESS OTHERWISE SPECIFIED:**
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES.

REF-LD-1371

Ø	ORIGINAL RELEASE FOR PRODUCTION	5-13-64	0	A.M.		REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
X3	1" DIM. WAS 2-1/4, 2-1/2 DIM WAS 4-1/4 SHORTENED, BECAUSE POSSIBILITY OF GRINDING	2-13-64					1/16 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, ELECTRICAL CAPACITOR MTG	
X2	4-1/4 DIM WAS 4-3/4	1-27-64					STOCK SIZE				
X1	REVISED & REDRAWN	12-27-63					COPPER				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					HALFHARD		John C Biele	aa	RJC
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A					
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							S-245-SILVER PLATE		OB	ac 1/1/64	MS-3540
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	Ø