REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-3544 Ø
1	GPT-200K	AX-392	11-5-63	

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.
WITH LATEST REVISION LETTER

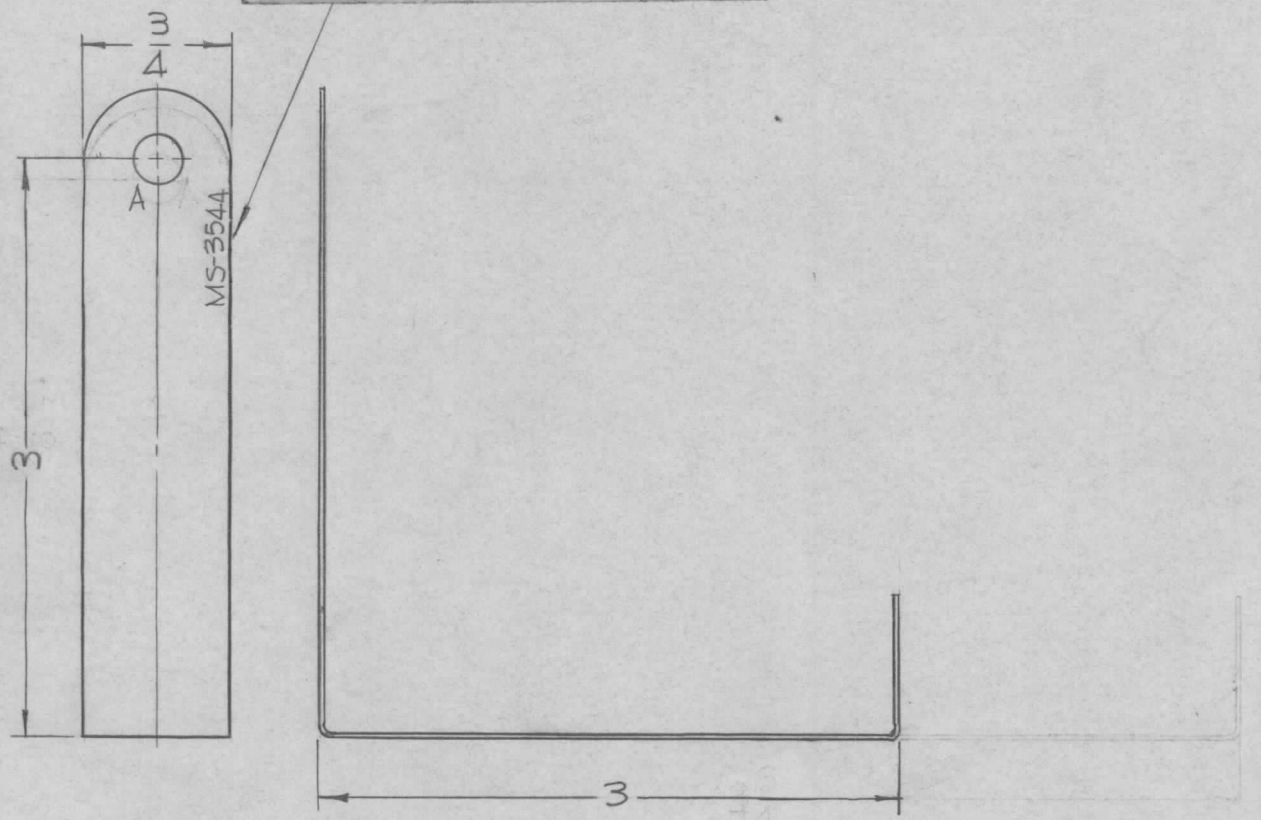

HOLE	DESCRIPTION	REQ.
A	15/64 DIA.	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

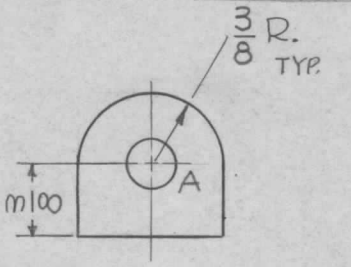

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0	ORIGINAL RELEASE FOR PRODUCTION	5/21/64	0	A.M.		
X1	3" WAS 2 7/8, 4 3/4	3-19-64				

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1"=1"

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.030 THICK	F. BUDETTI	

STOCK SIZE

COPPER

MATERIAL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

STRAP, GROUNDING

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S-245 SILVER PLATE		SRG	aa	MS-3544 Ø
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

4/10/64