


REQ. PER UNIT	USED ON			MS-3545	A
	MODEL	ASS'Y. NO.	DATE		
1	GPT-200K	AX-395	11-12-63		

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC.
W/LATEST
REV. LETTER.

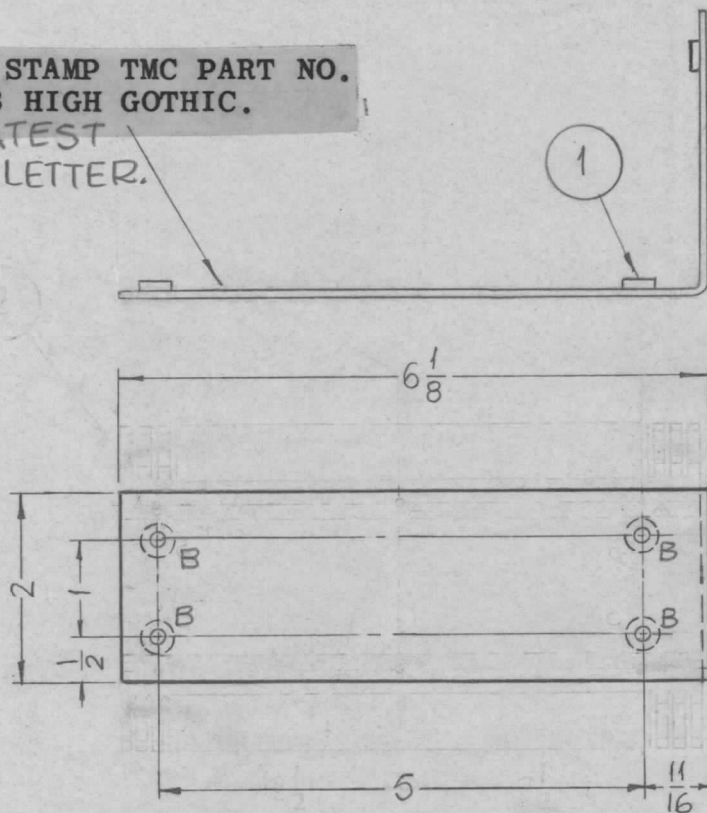

HOLE
HOLES:
B ~ .221-.224 DIA. — REQ.

6	1	NT-129-832-4	NUT ROUND, SPLINE			B			
REQ. ITEM	PART NO.		F. BUDETTI DESCRIPTION			SYMBOL			
A	.081 THICK		THE TECHNICAL MATERIEL CORP.						
0	STOCK SIZE		MAMARONECK, NEW YORK						
SYM	DESCRIPTION		BRACKET, PA. SHIELD						
	DATE		CH. NO.	DRAFTS	CHECKER	ENG. APP.			
	5.18.64								
UNLESS OTHERWISE SPECIFIED		SCALE		5052-H32			SRG	aa	RTE
DIMENSIONS ARE IN INCHES AND INCLUDE		1/2" = 1"		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
CHEMICALLY APPLIED OR PLATED FINISHES				S-404 YELLOW IRIDITE					
DECIMALS	TOLERANCES		CODE		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
.X ± .05	± 1/64								
.XX ± .01	ANGLES								
.XXX ± .005	± 0° 30'								
							MS-3545		A