

HOLES


REQ.

A-7/32 X 3/8 SLOT

16

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TER-18K600BF		10-8-63

MS-3550 Ø

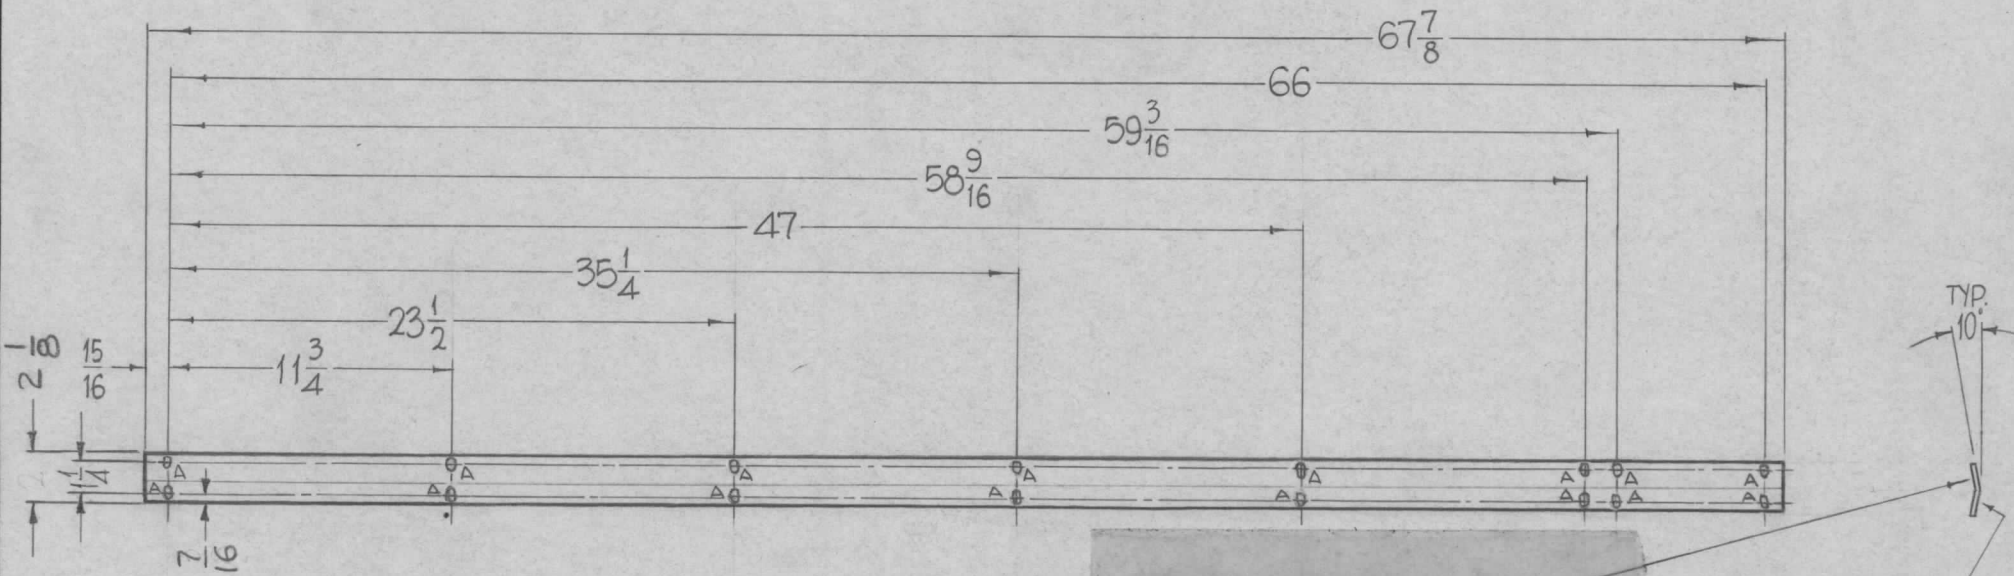

REAR VIEW SHOWN

STAMP TMC PART NO.
1/8 HIGH GOTHIC.

FINISH ON THIS SIDE.

FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
2. S114 - ZINC CHROMATE PRIMER) FRONT AND
3. S115 - SMOOTH GRAY ENAMEL) EDGES ONLY

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-13-66	AA	Jc						THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	STRIP TRIM
X2	DIA "A" HOLE WAS 7/32 DIMS 2 1/8 WAS 2 & 7/16 WAS 3/8	6-15-65		G.D.L.			.064 THICK				
X1	TER18K-600BF WAS TER15K600BF	1-13-64		SRG			ALUMINUM				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1/8" = 1"			5052-H-32		John C. Biele	gcb	1/13/66
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		SEE NOTES		FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.	

MS-3550 Ø