



HOLE	DESCRIPTION	REQ.
A	.120 DIA., CSK 82° TO .230.	1
B	.144 DIA., CSK 82° TO .284	9
C	13/64 DIA. FOR 10-32	2
D	.194 - .191 DIA.	3
E	SEE DETAIL	4
F	1" DIA.	7
G	.253 - .250 DIA.	6

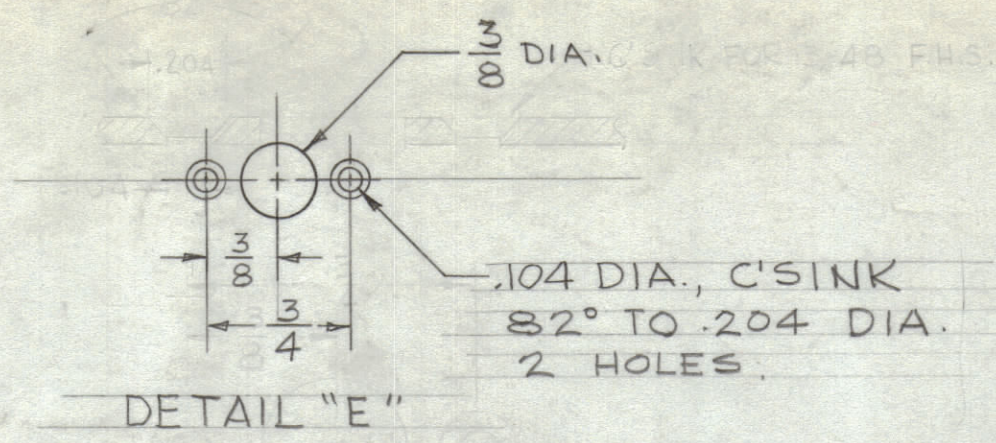

REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
	O	ORIGINAL RELEASE FOR PRODUCTION	4-20-64	0	A.M.	@
	R	"A" HOLE WAS 1/8 DIA.	1/2/65	14 386	AV.V.	JCB

(TOP & BOTTOM IDENTICAL)

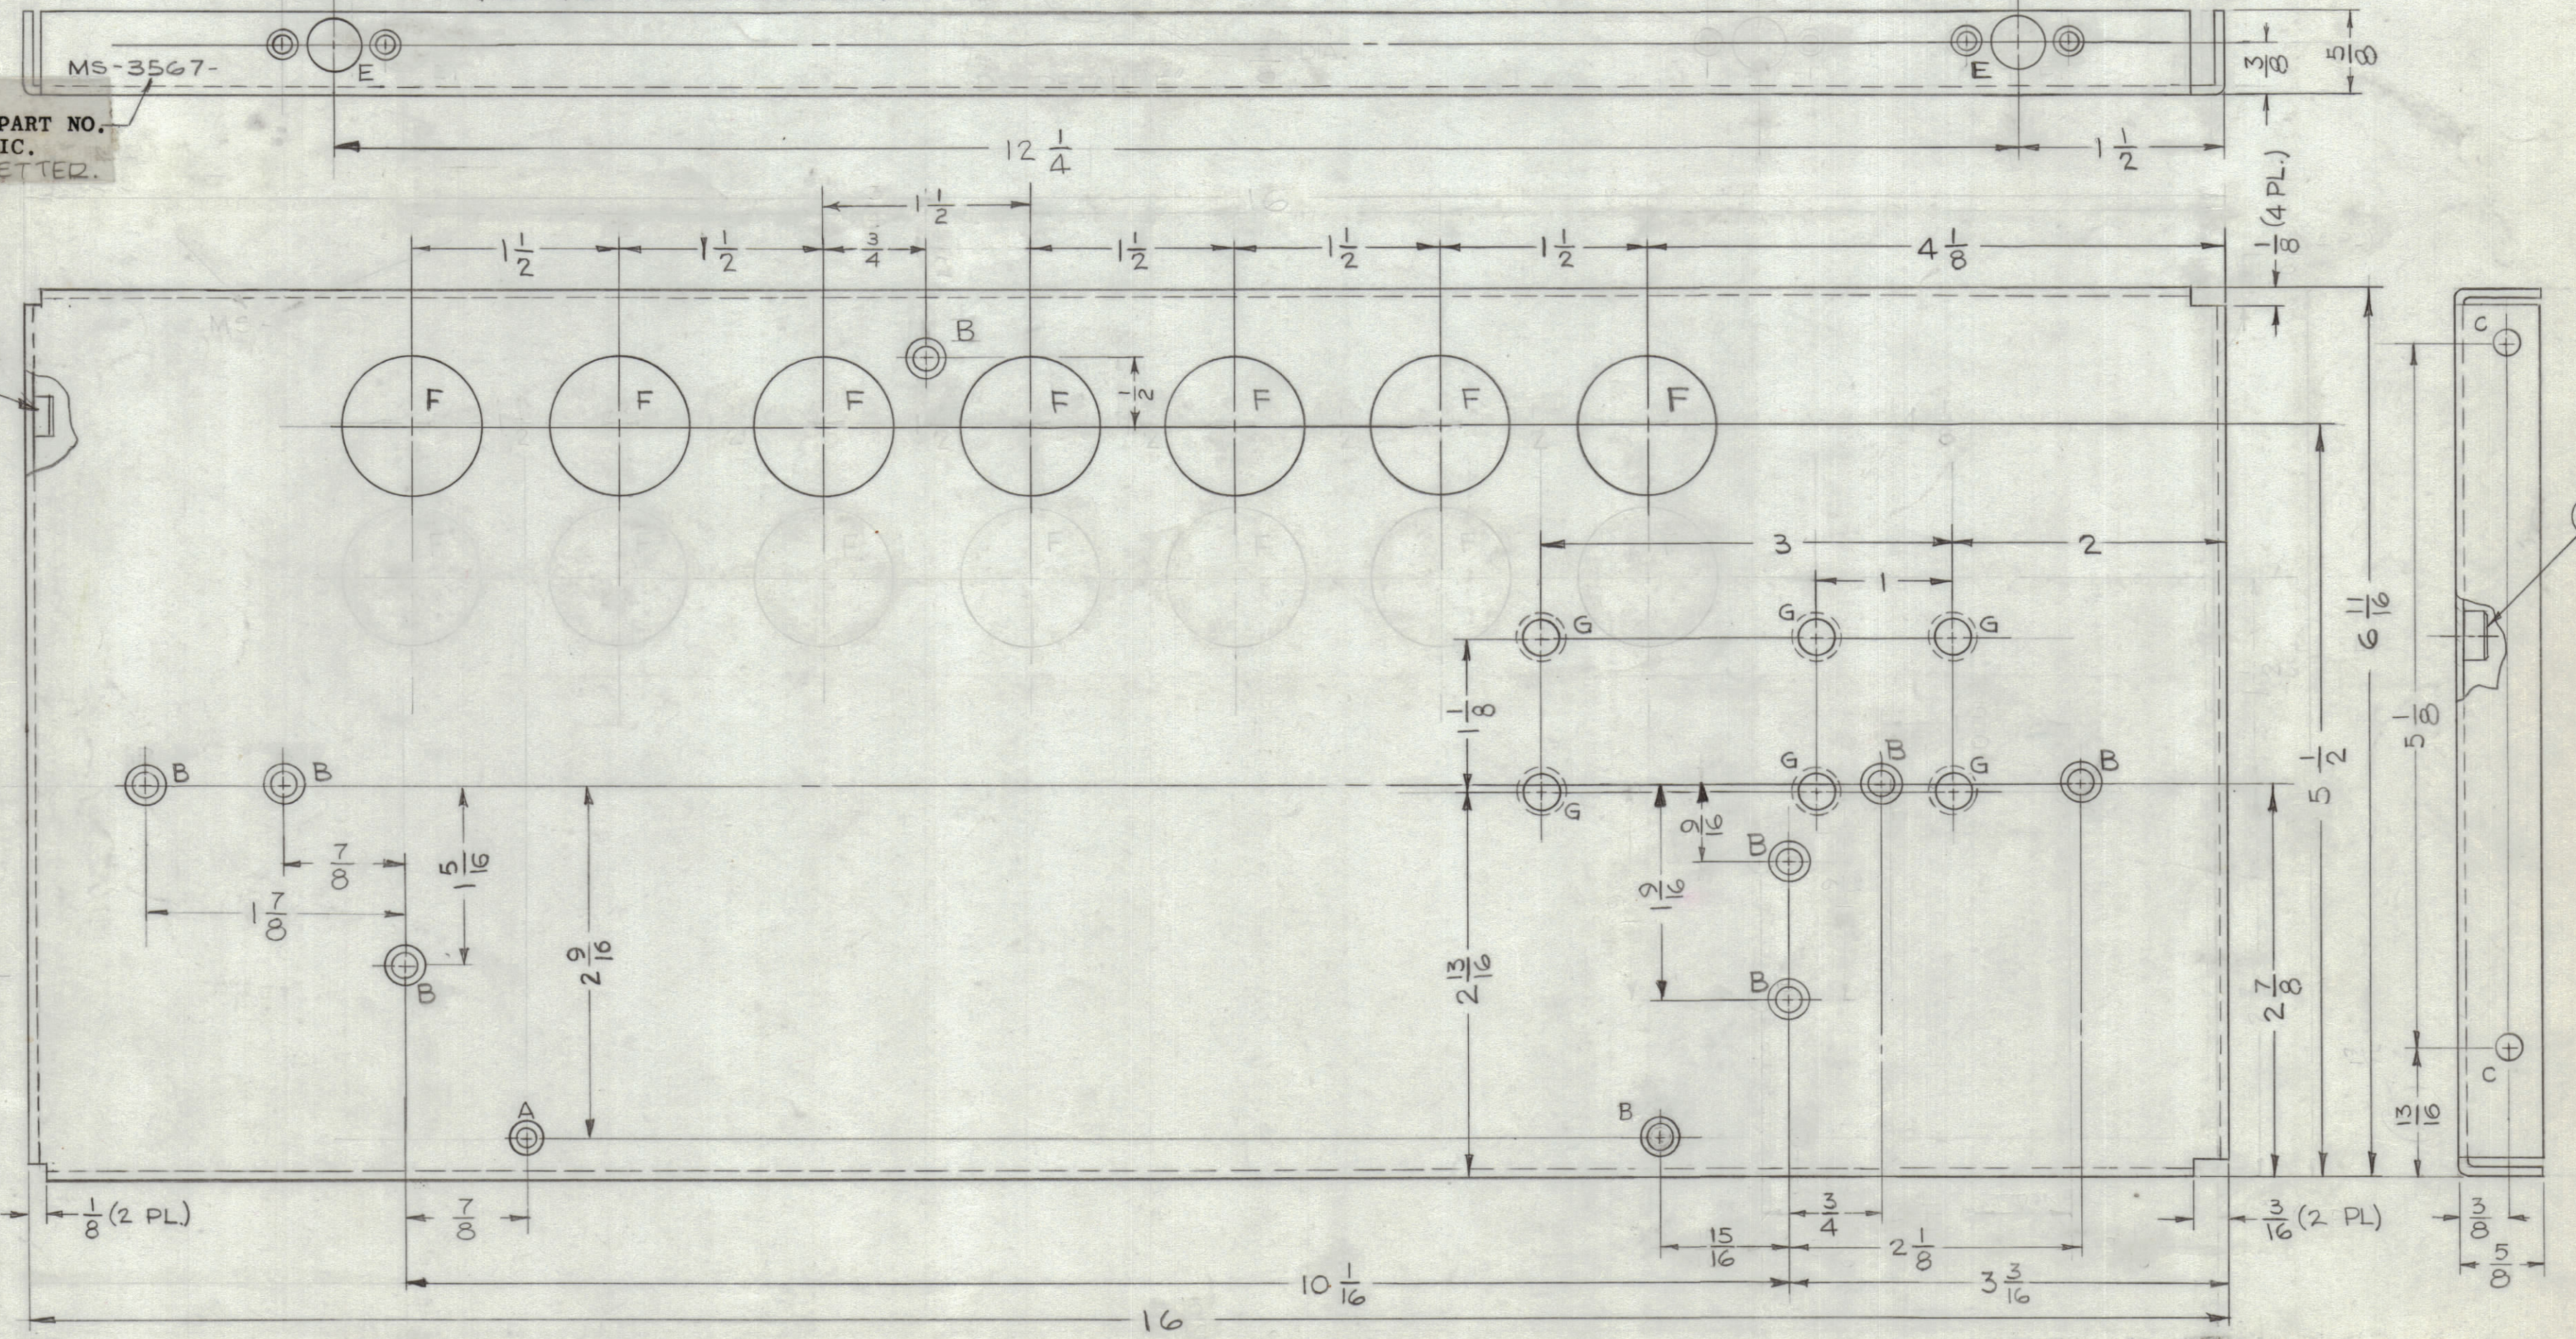

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC. W/LATEST REV. LETTER.

MOUNT IN ALL "D" HOLES

MOUNT IN ALL "G" HOLES

MS-3567 A

- UNLESS OTHERWISE SPECIFIED:
- USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 - ALL ANGULAR BENDS 90°.
 - REMOVE ALL BURRS AND SHARP EDGES.
 - MOUNT INSERTS AFTER FINISHING.

NOTES

MSA-1		
QTY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
6	2	NT-129-1032-4	NUT, ROUND, SWAGE TYPE	G
3	1	NT-129-632-4	NUT, ROUND, SWAGE TYPE	D

T-AALTONEN LIST OF MATERIAL

MATERIAL	.064 THK. ALUMINUM 5052 - H32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	S4-04-IRIDITE 14-2 AL COAT	TITLE PLATE, LEFT SIDE	

DRAWN	G.D.L.	DATE	B-15-63	FINAL APPROVAL	DATE	4/20/64
CHECKED	@	DATE	3-11-64			
ELECT. DES.	J.P.A.	DATE	12/16/63			
MECH. DES.	J.P.A.	DATE	3-11-64			

DECIMALS: .x ± .05, .xx ± .01, .xxx ± .005
 FRACTIONS: ± 1/64, ANGLES: ± 0° 30'

MS-3567 A