


HOLE	DESCRIPTION	REQ
A	11/64 DIA	3
B	.213 DIA C'SK 90° TO .265 DIA.	4

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
2	MSA-1		10-22-63

MS-3583 ○

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

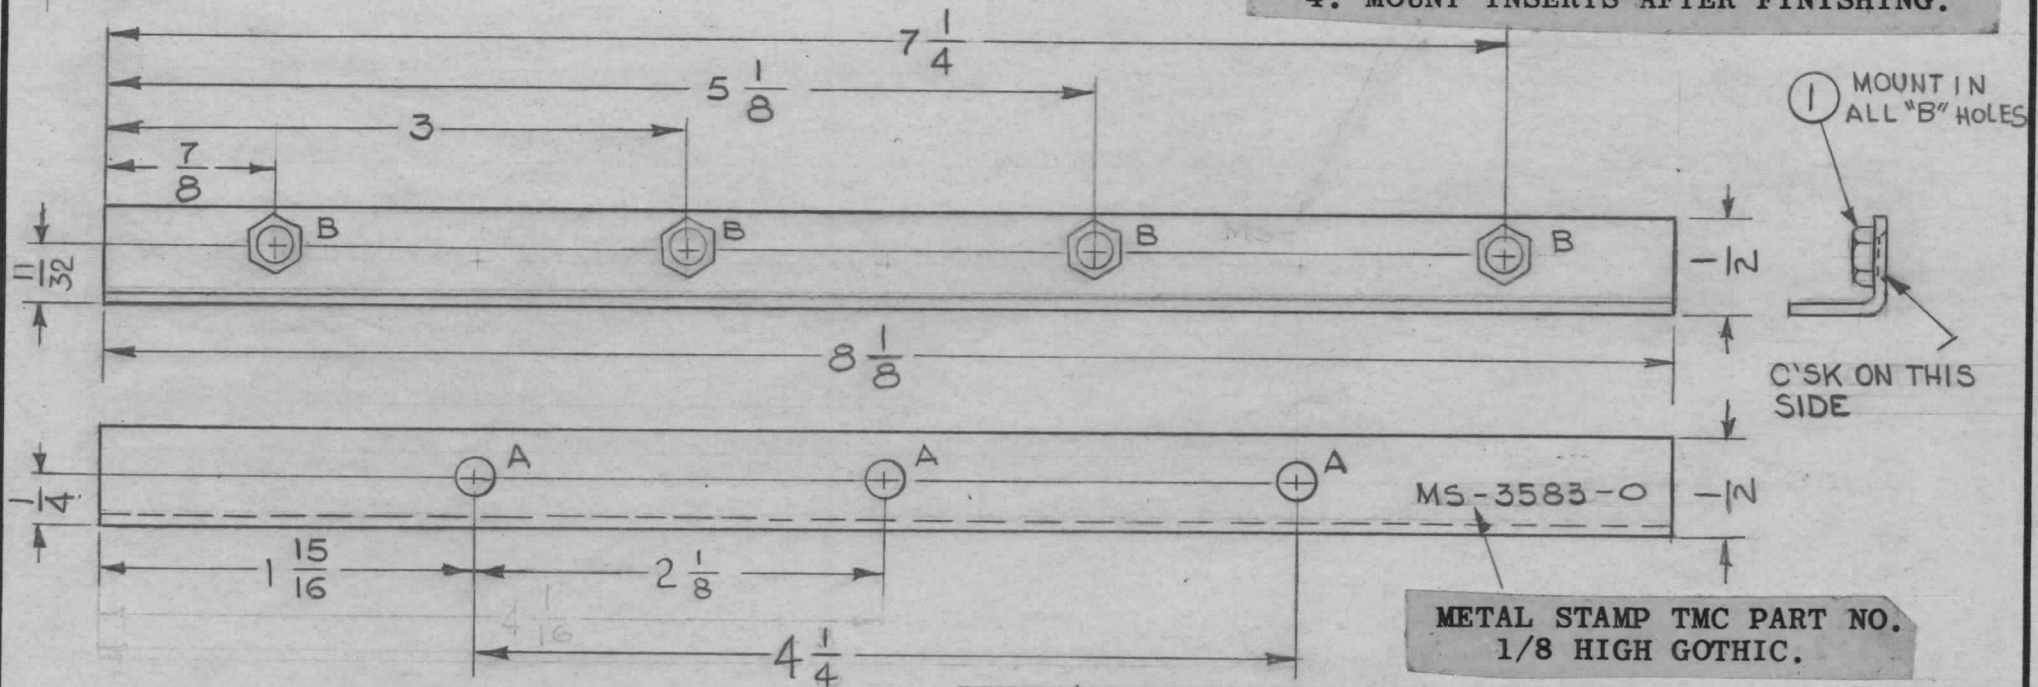

4	1	SM-107-23	HEX, INSERT	B		
REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL		
		064 TH'K	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
		ALUMINUM	BRACKET, MOUNTING, MODULE			
			AUDIO AMPLIFIER			
5052-H32	—#—	G.D.L	@ 3-11-64	RAC		
S404 IRIDITE 14-2 AL COAT						
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS-3583	○		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
○	ORIGINAL RELEASE FOR PRODUCTION	4-17-64	0		A.M.	@
X1	ITEM(1) WAS NT-129-0632-4	1-14-64			G.W.L.	@