


REQ. PER UNIT	USED ON			MS-3586 0
	MODEL	ASS'Y. NO.	DATE	
4	MSA-1	A-3398	8-29-63	

HOLE	DESCRIPTION	REQ
A	11/64 DIA.	2
B	.164-.161 DIA	2

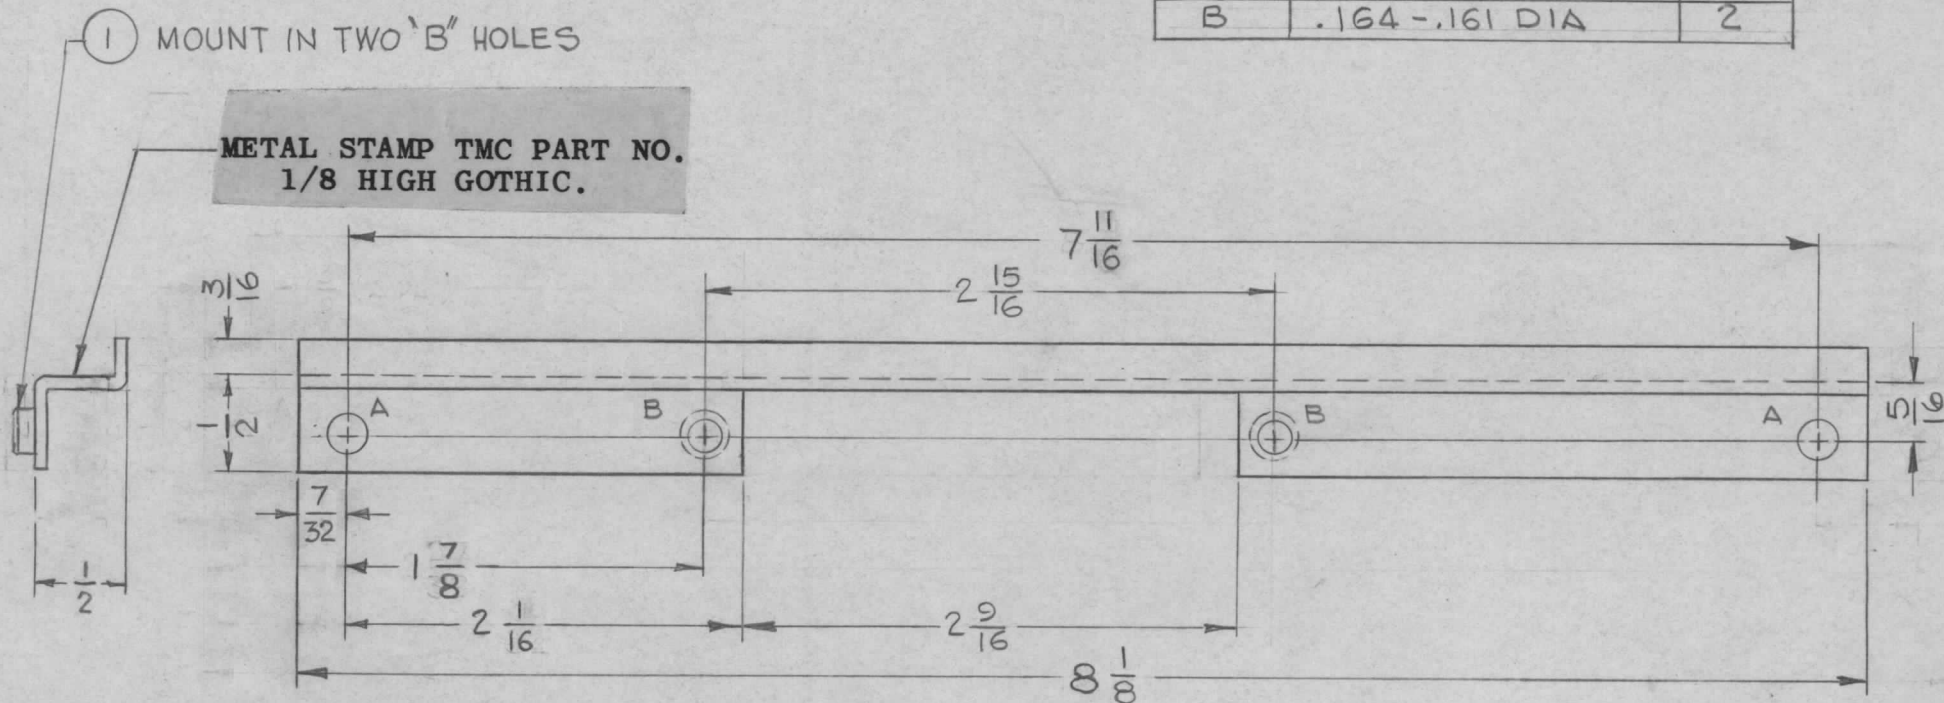

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

2	1	NT-129-440-4	NUT, ROUND, SWAGE TYPE	B		
REQ. ITEM	PART NO.		AALTONEN DESCRIPTION	SYMBOL		
	.064 THK		THE TECHNICAL MATERIEL CORP.			
	STOCK SIZE		MAMARONECK, NEW YORK			
0	ORIGINAL RELEASE FOR PRODUCTION		BRACKET, SINGLE CONNECTOR			
XI	8 1/2 was 9.12 removed (2) "A" holes					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1			
	DECIMALS	FRACTIONS	CODE			
.X ± .05	TOLERANCES	± 1/64	A			
.XX ± .01		ANGLES				
.XXX ± .005		± 0° 30'				
	5052-H32	—H—	G.D.L	@ 3-11-64	RJC	
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
	S404-YEL IRIDITE		JRL 1/6		MS-3586 0	
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			