


REQ. PER UNIT	USED ON			MS-3613	Φ
	MODEL	ASS'Y. NO.	DATE		
1	LFS-1		8-13-63		

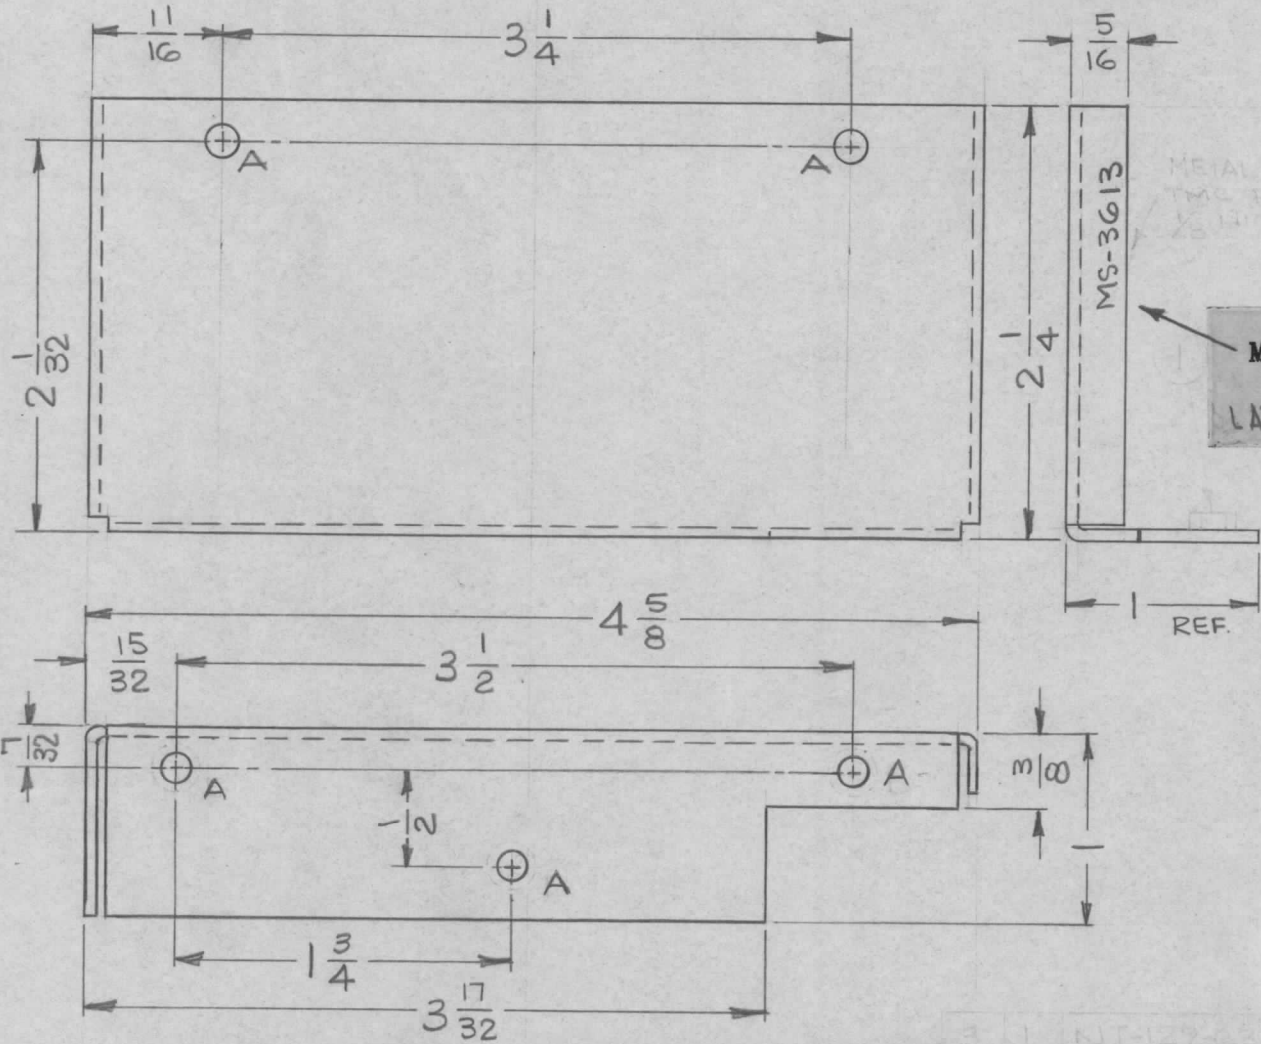

LEGEND		
HOLE	DESCRIPTION	REQ
A	5/32 DIA.	5

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES.

							REQ. ITEM	PART NO.	M. GELLMAN DESCRIPTION	SYMBOL	
Φ	ORIGINAL RELEASE FOR PRODUCTION	7/27/64	Φ	Green				.062 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, SUPPORT (POWER SUPPLY)	
X1	SWAGE NOT DELETED FROM PICTORIAL	2/24/64	1	ES				ALUMINUM			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		5052-H32			G. Sauer	@	Φ
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		340A-YELLOW IRIDITE					
TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS-3613	Φ