REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-3644	A
1	GPT-200K	AX-395	11-22-63		

METAL STAMP TMC PART NO. W/LATEST REV. LETTER.
1/8 HIGH GOTHIC.

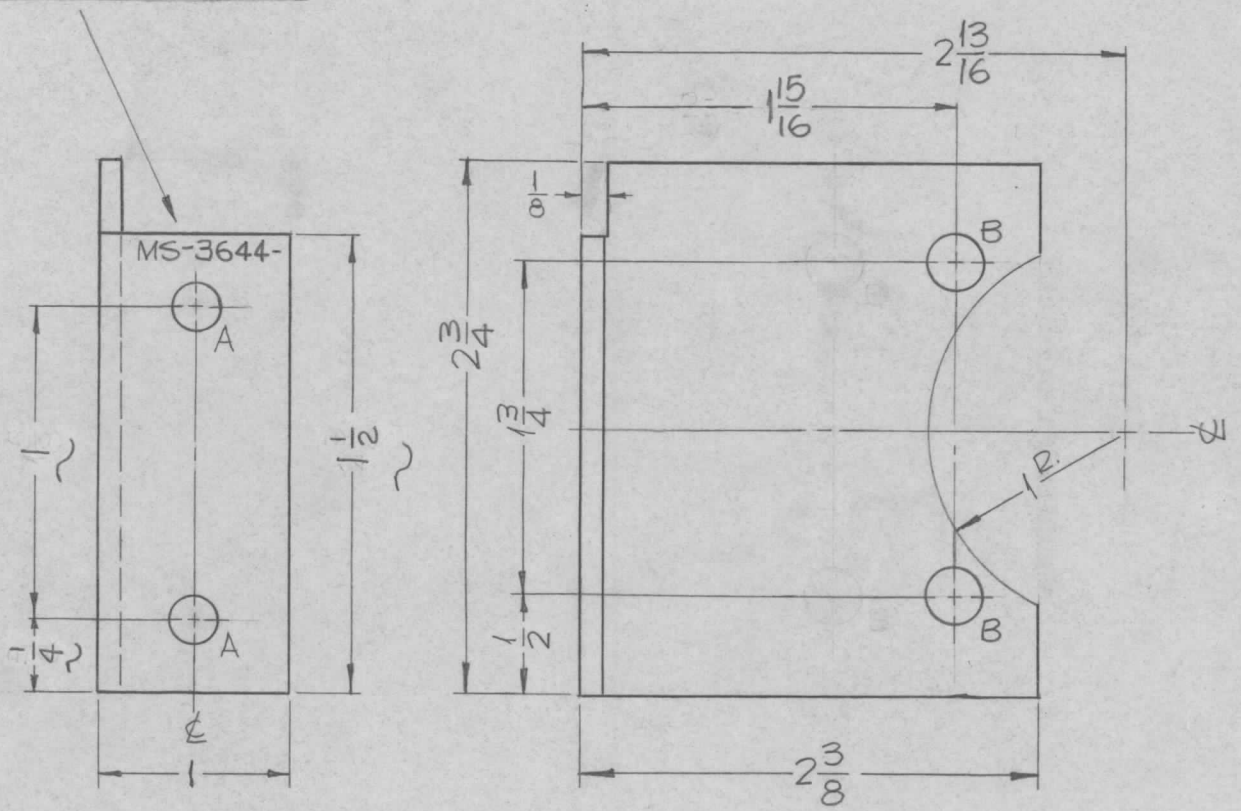

HOLES:
A- 15/64 DIA. ——— 2 REQ.
B- 9/32 DIA. ——— 2 REQ.

UNLESS OTHERWISE SPECIFIED:

USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.

ALL ANGULAR BENDS 90°.

REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	DIM. 1/4 WAS 3/8, 1 W. 1 5/8, 1 1/2 W. 2 3/8	7.13.64	11754	WB	JCS	
O	ORIGINAL RELEASE	5.16.64		WB		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1" = 1"

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			F. BUDETTI	

1/8 THICK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

S404 YELLOW IRIDITE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, SUPPORT
1 5/8 LINE

DRAWN	CHECKED	FINAL APPROVAL
SRG	aa	RC

ELEC. DES. APP.	MECH. DES. APP.	
QR	2/6/64	MS-3644 A