REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-3687	Ø
	TER-100K		1-31-64		

HOLES	REQ.
A-5/16 DIA.	1
B-5/16 X 1/2 SLOT	2

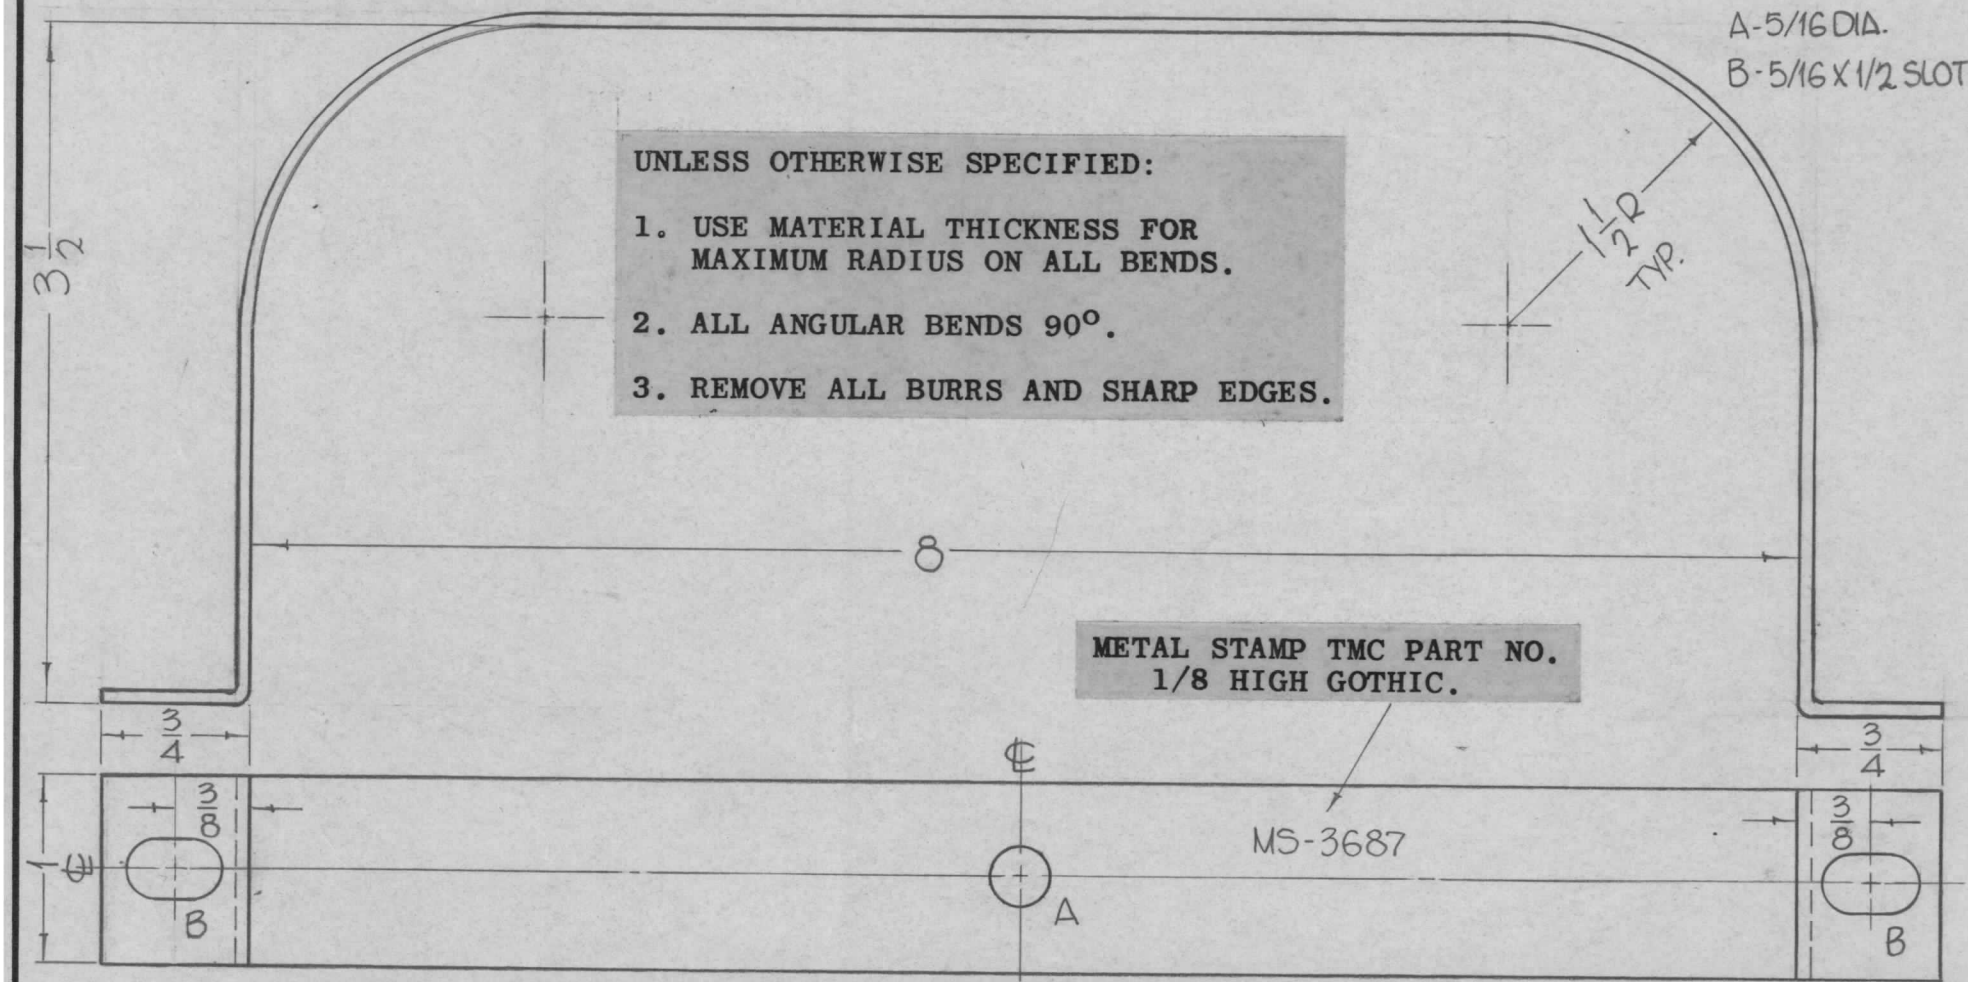

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	7/15/69		GW		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30′

SCALE

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

1/16 THICK
STOCK SIZE

COPPER
MATERIAL

TYPE & TEMPER: S-245-SILVER PLATE
HEAT TREAT. SPEC.
FINISH & SPEC. NO.

F. BUDETTI

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

LEAD, ELECTRICAL

DRAWN	CHECKED	FINAL APPROVAL
John C Biele		7/15/69
AVC		MS-3687 Ø

ELEC. DES. APP. | MECH. DES. APP.