


METAL STAMP TMC PART NO. 1/8 HIGH
GOTHIC W/LATEST REVISION LETTER.(INSIDE)

HOLES
A - 1/4 DIA. ——— 4 REQ.

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APFD
0	ORIGINAL RELEASE FOR PRODUCTION	5-4-64		SEG		

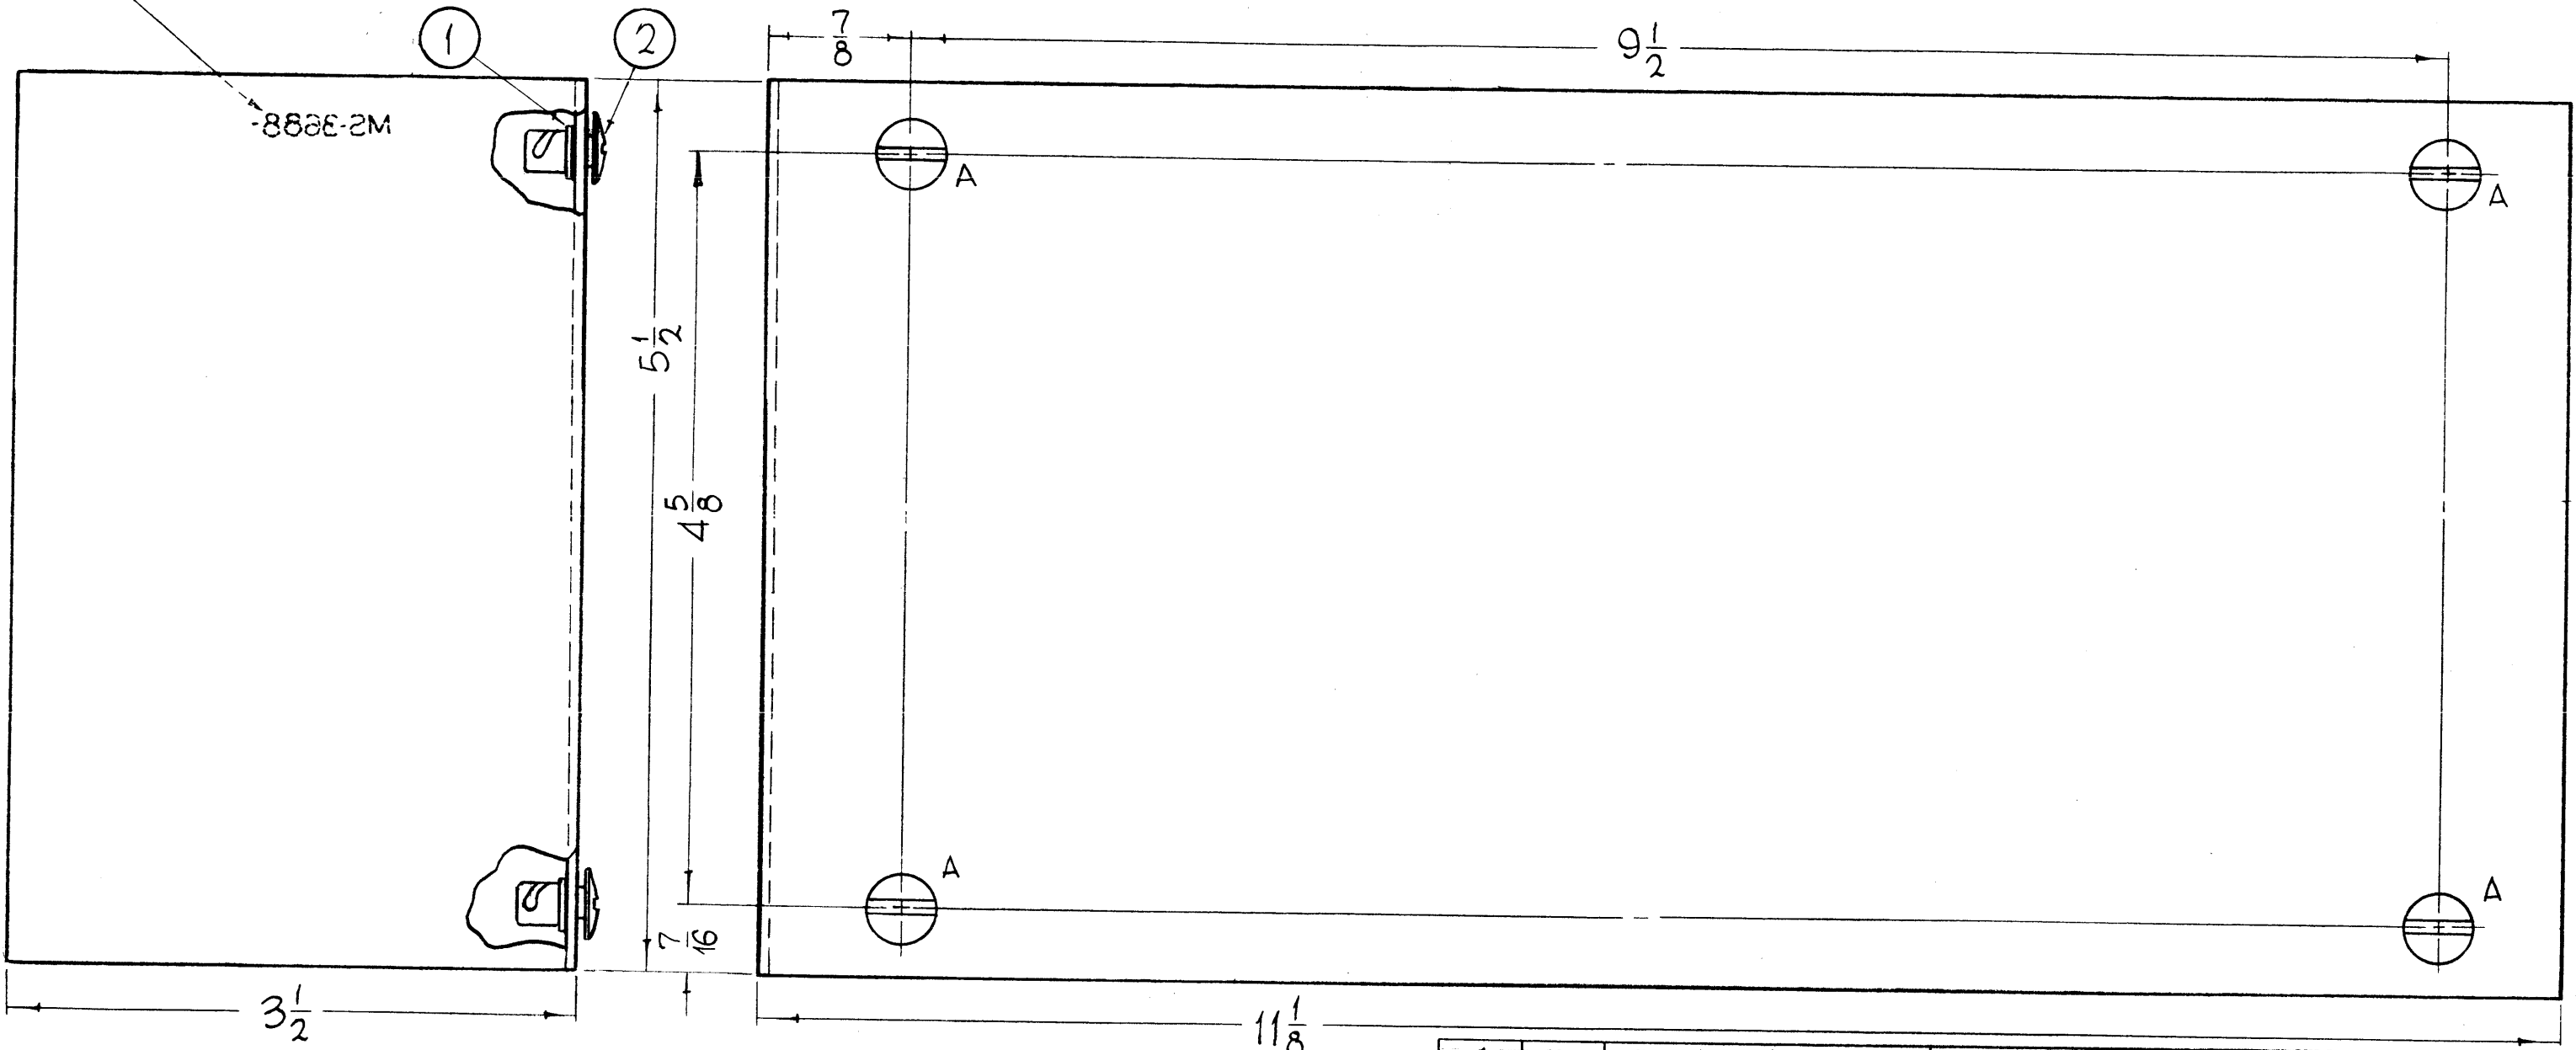

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT ITEMS 1, 2 AFTER FINISHING.

NOTES

REF-TMC DWG. LD-1392-

1	GPT-10K()7(A)505	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1"=1"	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
4	2	FS-110-1	STUD, SLOTTED HEAD	
4	1	FS-109-3	RING, STUD RETAINING	

LIST OF MATERIAL

MATERIAL .064 THICK ALUMINUM, 5052, H-32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH S-404-IRIDITE, 14-2-AL-COAT	TITLE SHIELD, H.V. PROTECTOR		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN John C. Biele	DATE 2-8-64
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED JCB	DATE 2/27/64
FRACTIONS ± 1/64 ± 0° 30'		ELECT. DES.	DATE
TOLERANCES		MECH. DES. JCB	DATE 3/17/64
		FINAL APPROVAL RJC	DATE 5-6-64
		SHEET MS-3688	
		REV. LTR. 0	