


REQ. PER UNIT	USED ON			MS 3705 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	CSS-2		2-14-64	

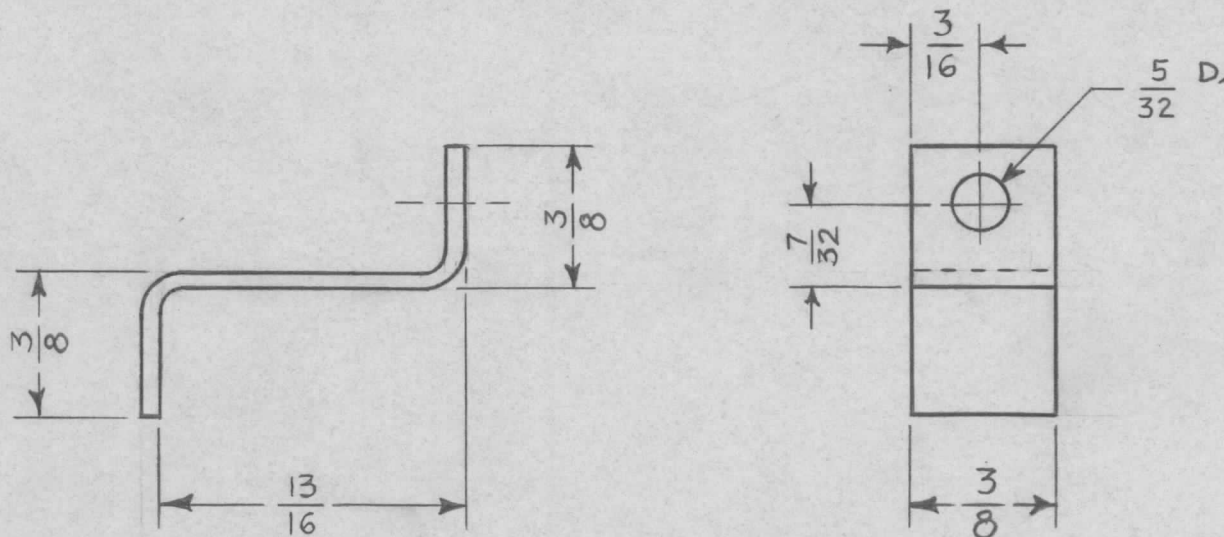

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	GELLMAN	DESCRIPTION	SYMBOL
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	6/29/64	\emptyset	A.M.			.062 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXPERIMENTAL RELEASE	6.5.64	X	A.M.			ALUMINUM		BRACKET, CAPACITOR		
							MATERIAL				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	2:1				5052-H32	— # —	<i>N. Peters</i>	@	<i>RPC</i>
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	TOLERANCES	CODE A			5404 YELLOW IRIDITE 14-2 AL COAT	FINISH & SPEC. NO.	<i>[Signature]</i>		MS 3705 \emptyset
									ELEC. DES. APP.	MECH. DES. APP.	