


REQ. PER UNIT	USED ON			MS-3718	A
	MODEL	ASS'Y. NO.	DATE		
2	GPR-92		2-28-62		

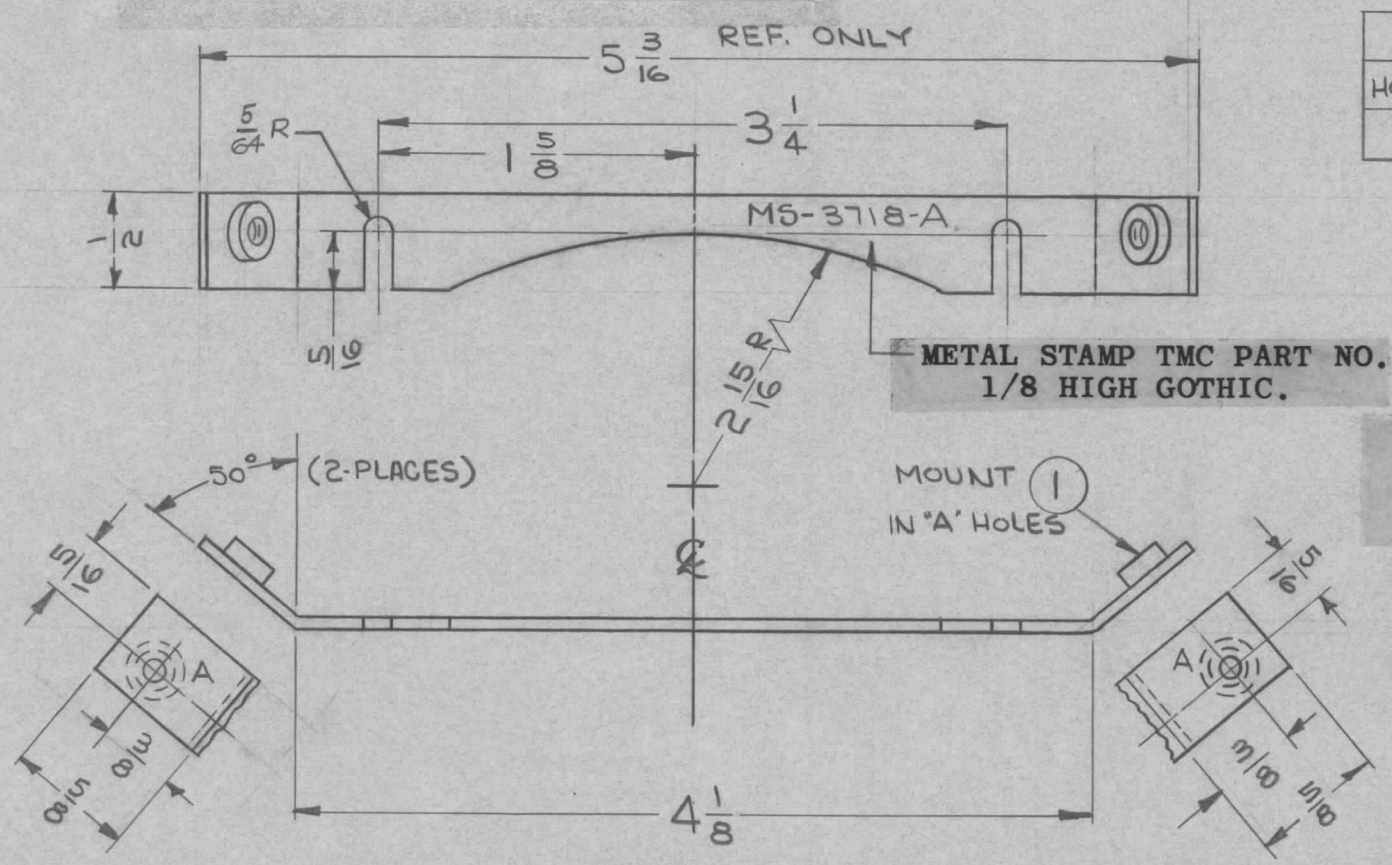

LEGEND		
HOLE	DESCRIPTION	REQ
A	.191-.194 DIA.	2

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. REMOVE ALL BURRS AND SHARP EDGES.
 3. MOUNT INSERTS AFTER FINISHING.

2	1	NT-129-632-4	NUT, ROUND, SWAGE TYPE		A
REQ.	ITEM	PART NO.	GELLMAN	DESCRIPTION	SYMBOL
A	5/64 R ADDED		4/28/64	11306	A.M. @ W
O	ORIGINAL RELEASE FOR PRODUCTION		3/9/64		gls
X	EXPER. RELEASE		3/9/64	X	gls
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A	
TOLERANCES		5052-H32		G. Soren	
		TYPE & TEMPER		HEAT TREAT. SPEC.	
		S404 - YEL. IRIDITE		DRAWN	
		FINISH & SPEC. NO.		MECH. DES. APP.	
		ELEC. DES. APP.		MECH. DES. APP.	
		MS-3718		A	