


REQ. PER UNIT	USED ON			MS-3735	⊙
	MODEL	ASS'Y. NO.	DATE		
X	CON		4-1-64		

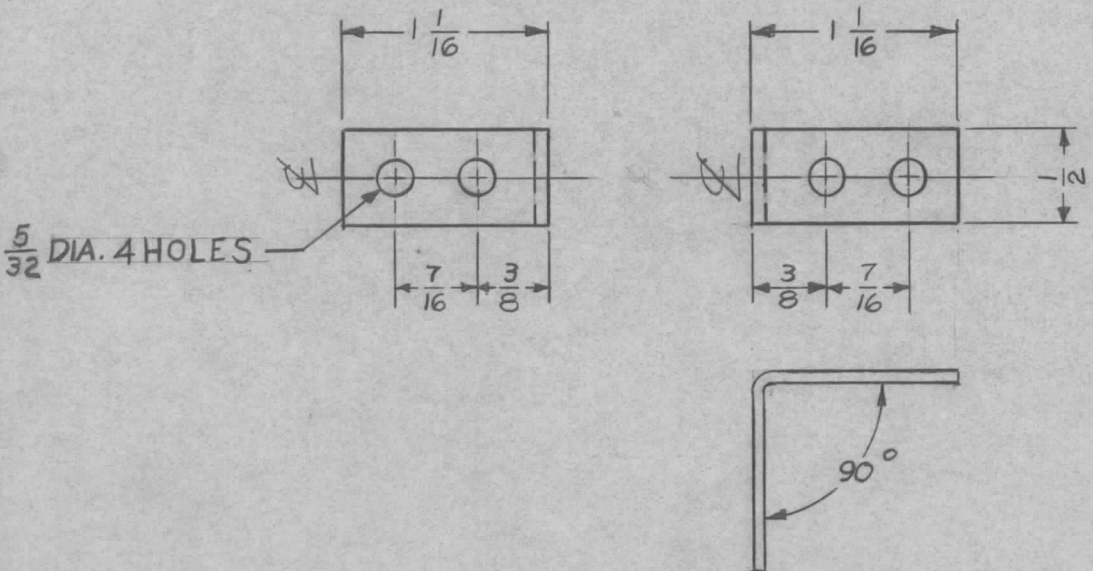

**UNLESS OTHERWISE SPECIFIED:**

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

**FINISHES:** S-371-DEGREASING OF PLAIN STEEL PARTS.  
 S-114-ZINC CHROMATE PRIMER.  
 S-220-RCAF GRAY SEMI-GLOSS ENAMEL.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	16 GA.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
O	ORIGINAL RELEASE	4-28-64	WB
X	EXPERIMENTAL RELEASE	4-1-64	X A.M. @
	LOW CARBON STEEL	BRACKET, ANGLE	
		DESK TOP	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	
		1:1	
HOT ROLLED		A. MARINO @	4-23-64
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
SEE CHART		4-28-64	
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS-3735 ⊙

DECIMALS	FRACTIONS	CODE
.X ± .05	± 1/64	A
.XX ± .01	ANGLES	
.XXX ± .005	± 0° 30'	