REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
2	AX-633	A5550	9-21-66
2	AX-646	A5553	9-21-66
2	AX-647	A5556	9-21-66

MS3748

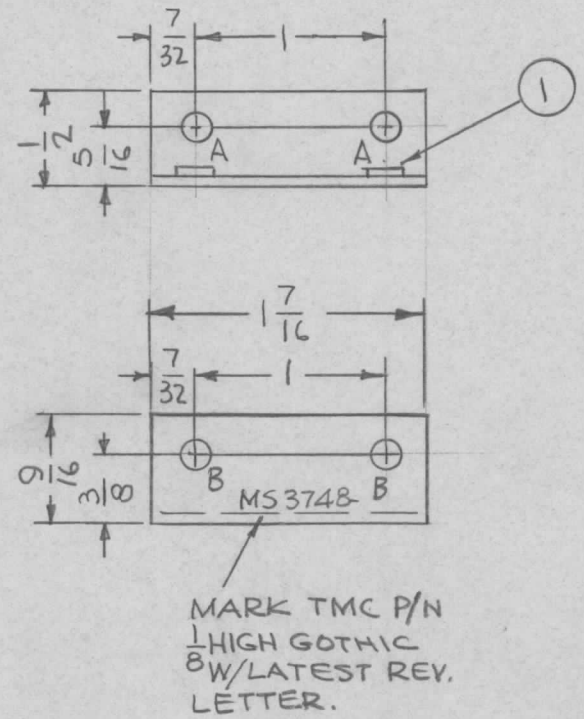

HOLES:
A ~ 9/64 DIA. (2 REQ.)
B ~ .161 - .164 DIA. (2 REQ.)

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	12/30/66	Ø	RME		
X	EXP. RELEASE	9-21-66	X			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1:1

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT129-440-3	NUT, PLAIN, SPLINE	B

F. BUDETTI

.051 THICK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

HEAT TREAT. SPEC.

5404 YEL. IRIDITE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, MTG. SHIELD

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

MS3748

REPROVEL NO. 440H

23645