REQ. PER UNIT	USED ON			MS3750	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	BMA 128	10-5-66		

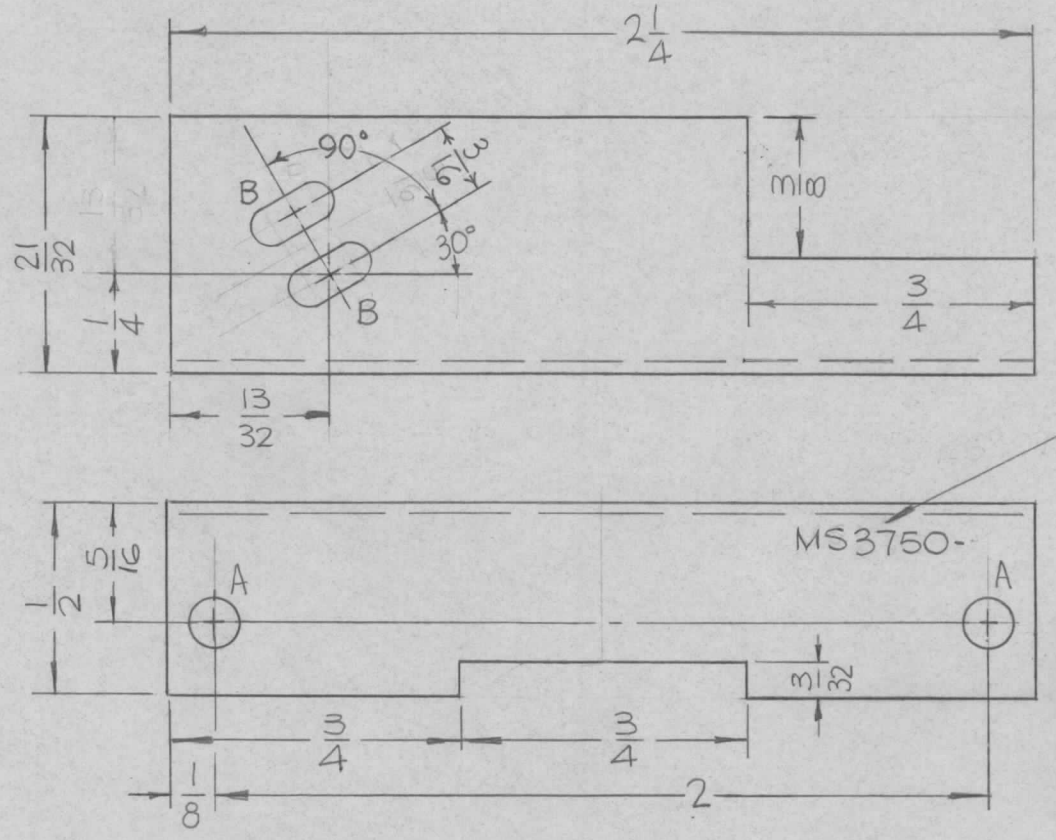

HOLES:
A - 1/8 DIA. (2 REQ.)
B - 3/32 X 7/32 SLOT (2 REQ.)

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/18/66	Ø	CV		
X	EXP. RELEASE	10-5-66	X			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 2:1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.
		.041 THICK

STOCK SIZE

ALUMINUM

MATERIAL

5052-H32

TYPE & TEMPER

HEAT TREAT. SPEC.

S404 YEL. IRIDITE

FINISH & SPEC. NO.

F. BUDETTI DESCRIPTION

SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, MTG, SWITCH

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

MS3750 Ø

REPROVEL NO. 440H 23645