
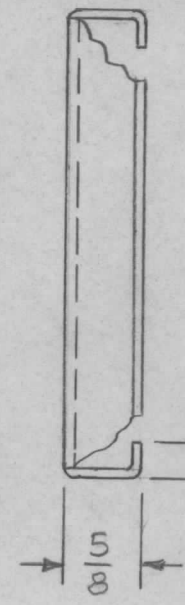


REQ. PER UNIT	USED ON			MS 3765-	A
	MODEL	ASSY. NO.	DATE		
1	RAK-110	BMA 156	9-6-66		
1	RAK-111	BMA 158	9-6-66		

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV LETTER

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

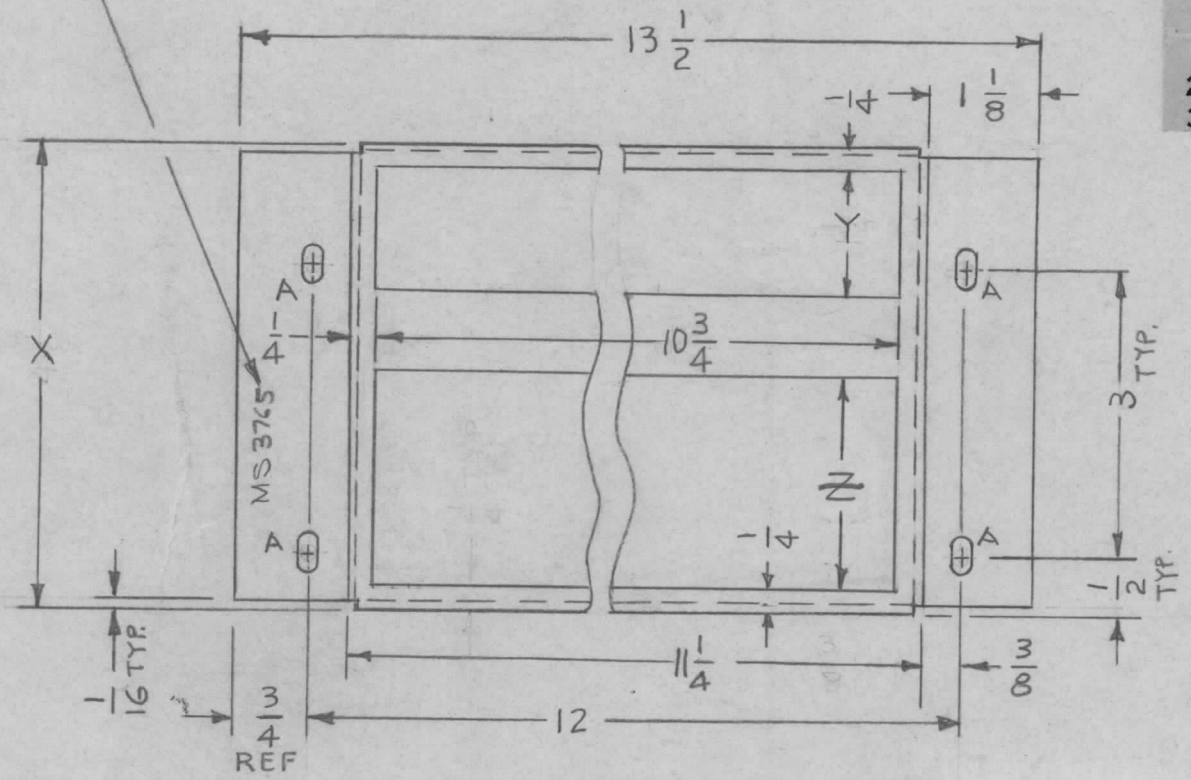

SLOTS
A - 3/16 x 3/8 (4)

TMC P/N	X	Y	Z
MS 3765-1	4 7/8	1 1/4	-
MS 3765-2	4	2 1/4	-
MS 3765-3	4 7/8	1 1/4	2 1/4

A	MS 3765-3 & Z, V4 DIM ADDED	9-20-67	18518	H.G.	FB	
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-28-66		WAD		
X ₁	MS 3765-2 ADDED 5/8 WAS 3/4	11-17-66	X ₁			
X	EXP. RELEASE	9-6-66	X	JBC		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
	.062 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE		ADAPTER, AIR CHAMBER	
	ALUMINUM			
	MATERIAL			
5052-H32		JBC 9-6-66	QC	FB
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
5520 TEX VINYL				MS 3765- A
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		