| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | MS 3782 | A |
|---|---|---|---|---|---|
| 1 | SBS-7 | A2885 | 4-22-64 | | |

| HOLE | DESCRIPTION | REQ. |
|---|---|---|
| A | .161 - .164 DIA. | 4 |
| B | 5/32 DIA. | 2 |
| C | .191 - .194 DIA. | 1 |

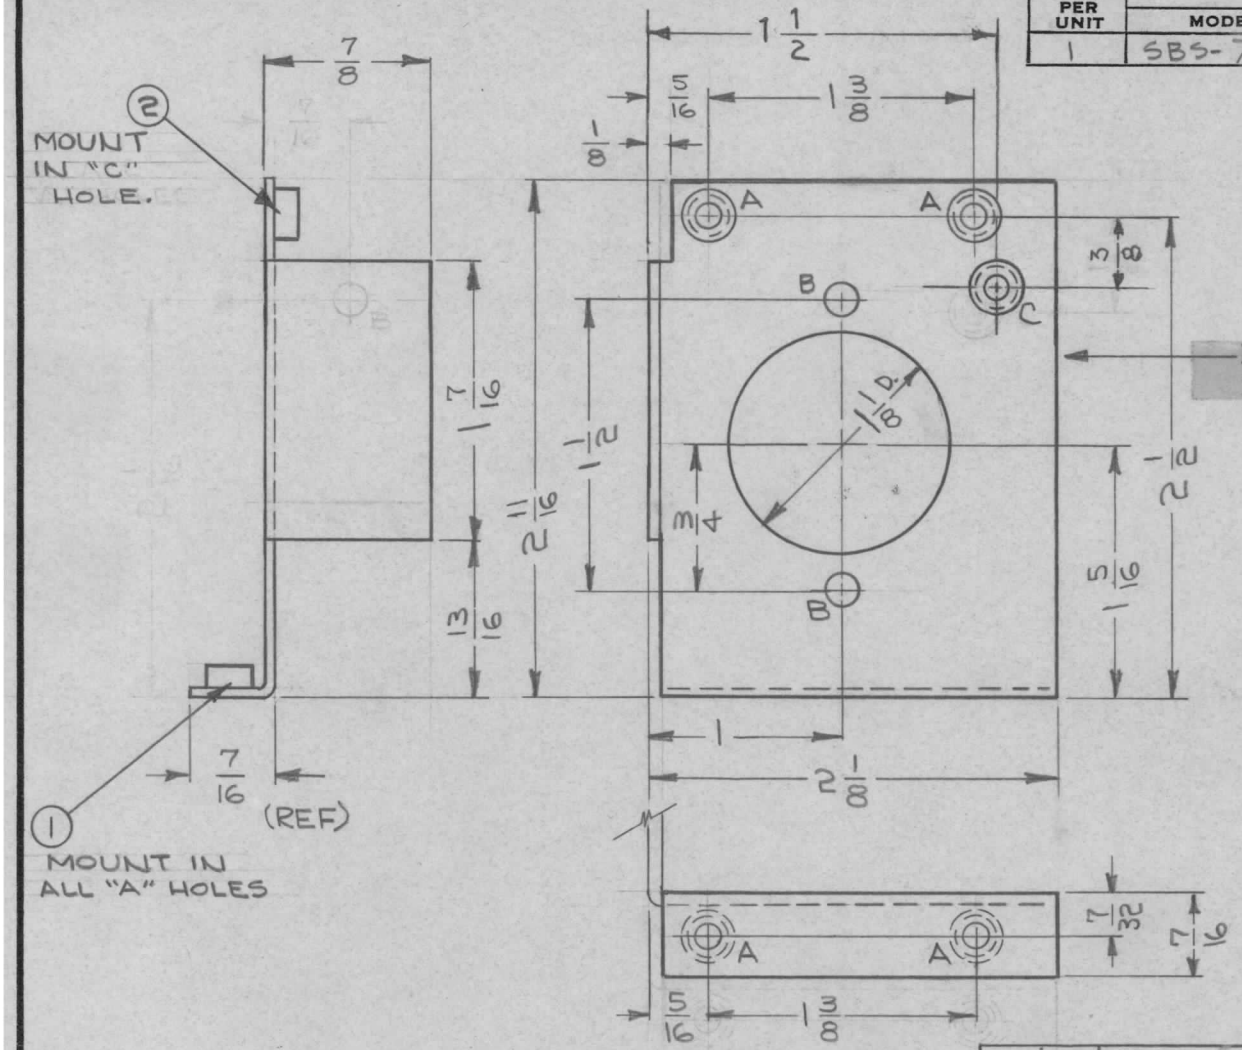


METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC ON REAR, WITH LATEST REVISION LETTER

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

REF: LD 1524 (1)

| REQ. | ITEM | PART NO. | O. POSE DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| 1 | 2 | NT 129-632-4 | NUT, ROUND, SWAGE TYPE | C |
| 4 | 1 | NT 129-440-4 | NUT, ROUND, SWAGE TYPE | A |

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| A | DELE "B" HOLE. RELOC. "C" HOLE | 11-15-66 | 17243 | | | |
| Ø | ORIGINAL RELEASE | 11/1/65 | | | | |
| X | EXPER. RELEASE | 4-22-64 | 1 | | | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

.064 THK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

S404 - YELLOW IRIDITE — FINISH & SPEC. NO.

HEAT TREAT. SPEC.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MOUNTING PLATE, TUBE SOCKET

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| | | 10/20/65 |

| ELEC. DES. APP. | MECH. DES. APP. | MS 3782 | A |
|---|---|---|---|
| SD | | | |