


HOLES

- A-3/16 DIA. 3
- B-7/32 DIA x 9/32 SLOT 2
- C-5/8 DIA. (6REQ.)

REQ. PER UNIT	USED ON	
	MODEL	DATE
1EA	STR-1A	5-15-64
1EA	STE	5-15-64

MS3815 Ø

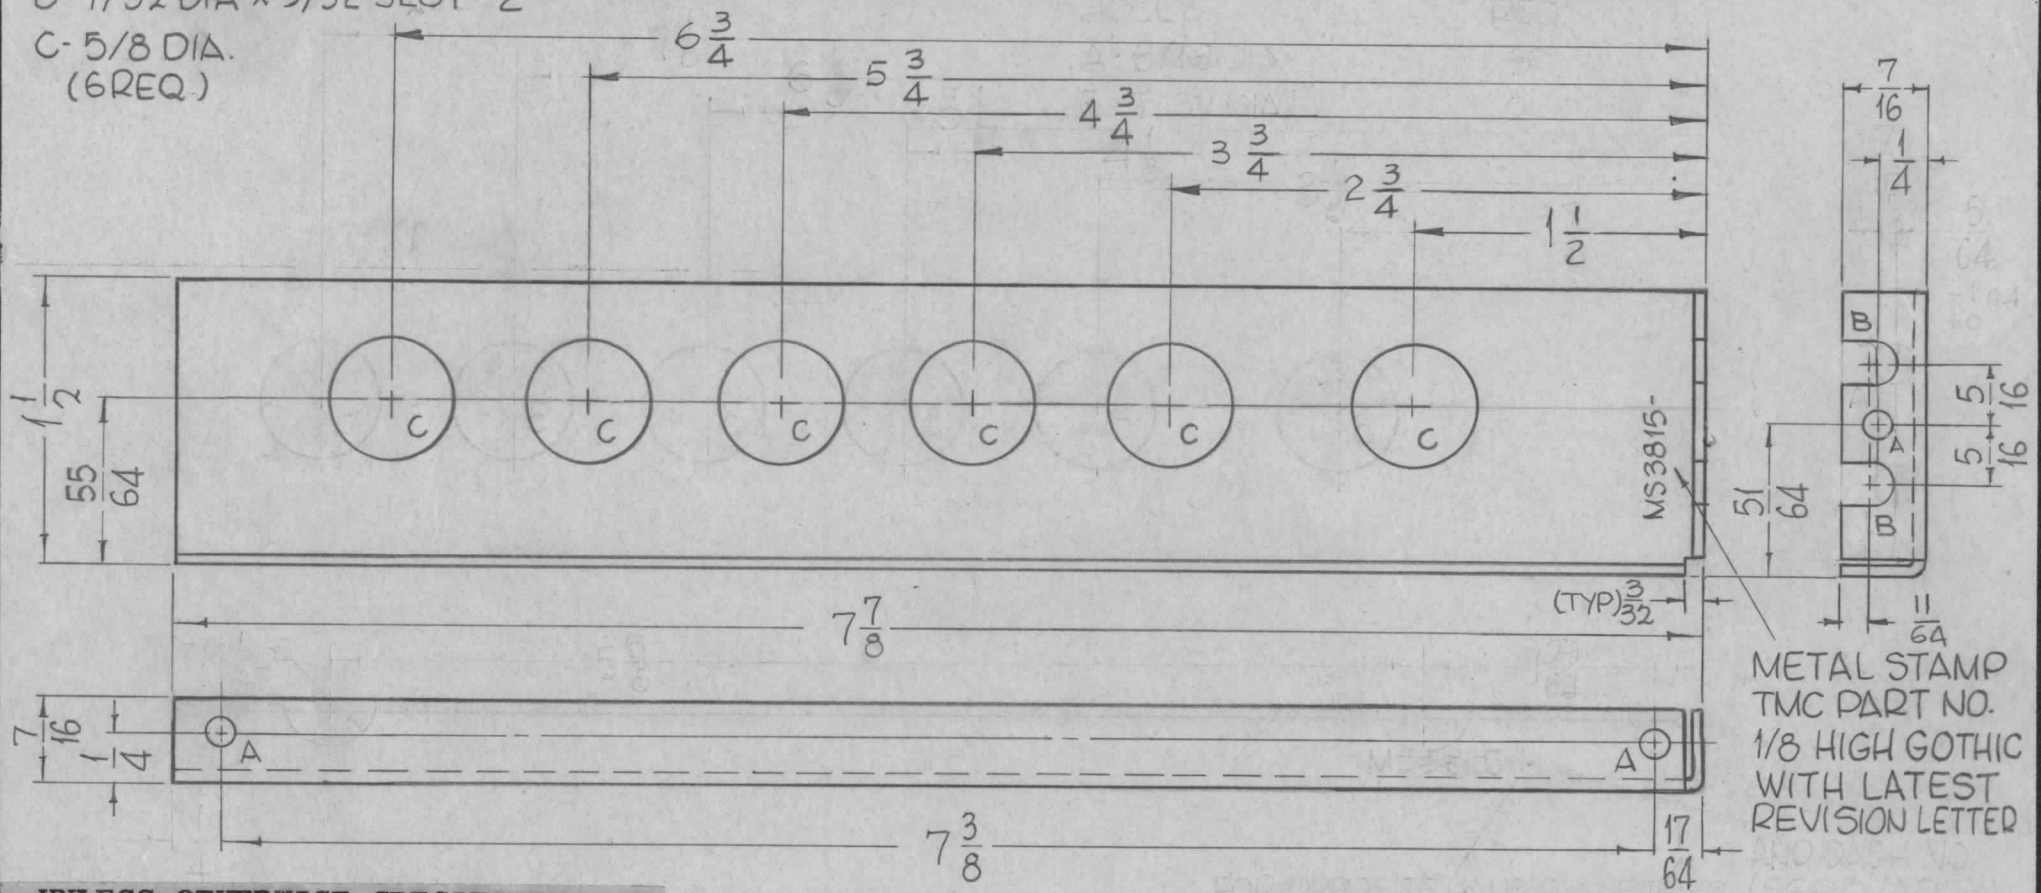

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.

Ø	ORIGINAL RELEASE FOR PRODUCTION	9-24-64	Ø	JL	REQ. ITEM	PART NO.	T. AALTONEN	DESCRIPTION	SYMBOL
X2	"B" HOLES WERE 7/32 DIA	6-4-64	#	G.D.L	.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X1	ALL "C" HOLES RELOCATED	6-3-64	#	G.D.L	STOCK SIZE				
X	EXPERIMENTAL RELEASE	5-15-64	#	G.D.L	ALUMINUM		BRACKET, UNIT GUIDE		
SYM		DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	LEFT SIDE	
UNLESS OTHERWISE SPECIFIED		SCALE		5052-H32		John C Biele		ELEC. DES. APP.	
DIMENSIONS ARE IN INCHES AND INCLUDE		1:1		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	
CHEMICALLY APPLIED OR PLATED FINISHES		A		S404-IRIDITE, 14-2 AL COAT		TJA		CHECKED	
DECIMALS	FRACTIONS	CODE	FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		MS3815 Ø
.X ± .05	± 1/64	A							
.XX ± .01	ANGLES								
.XXX ± .005	± 0° 30'								