


REQ. PER UNIT	USED ON			MS3818	Ø
	MODEL	ASS'Y. NO.	DATE		
1	STR-1A		5-16-64		
1	STE				

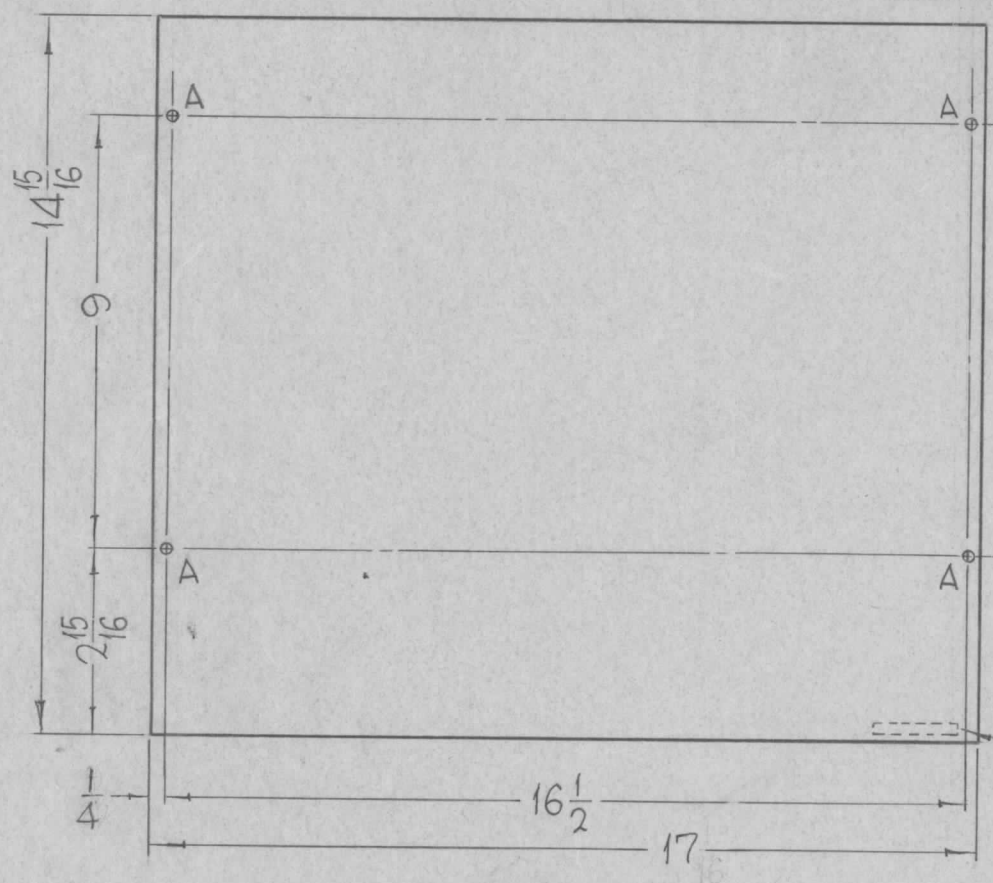

HOLES REQ.
A-1/4 DIA. 4

METAL STAMP TMC NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

FRONT VIEW SHOWN

REMOVE ALL BURRS AND SHARP EDGES.

4	2	FS110-1	STUD, SLOTTED HEAD	A
4	1	FS109-3	RING, STUD RETAINING	A
REQ. ITEM		PART NO.	T. AALTONEN DESCRIPTION	SYMBOL

Ø	ORIGINAL RELEASE FOR PRODUCTION	9-24-64	Ø	9L		
X1	DIMENSIONS 1/4 WAS 9/32 & 17 WAS 17 1/16	6-2-64	#	G.D.L	J.R.S.	
X	EXPERIMENTAL RELEASE					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:4				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			

.051 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
STOCK SIZE		COVER, TOP			
ALUMINUM		MATERIAL			
5052-H32	#	John C Biele	AT @	KAC	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
S404-IRIDITE, 14-2 ALCOAT		Jka		MS3818 Ø	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		