


REQ. PER UNIT	USED ON			MS3877 Ø
	MODEL	ASS'Y. NO.	DATE	
1	HFSR-1		6-30-64	

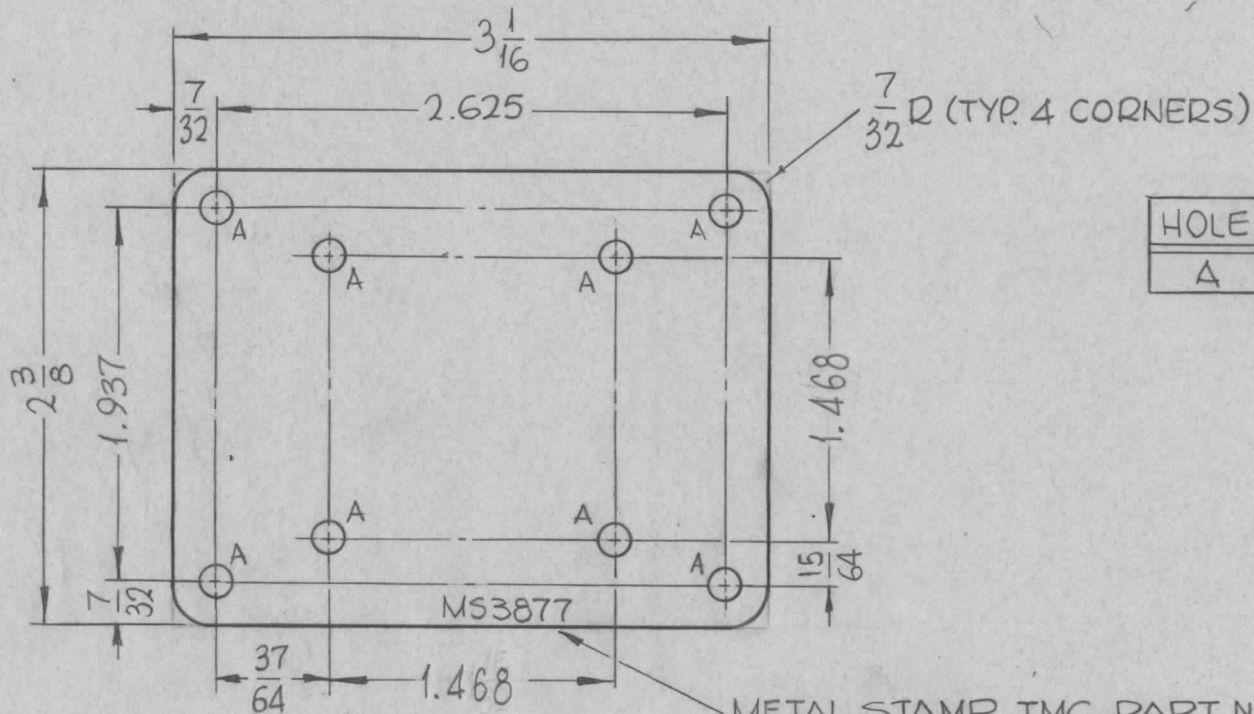

HOLE	DESCRIPTION	REQ.
A	5/32 DIA.	8

METAL STAMP TMC PART NO.  
1/8 HIGH GOTHIC W/LATEST REV.  
LETTER,

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	EATON	DESCRIPTION	SYMBOL			
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-23-65	13649	RL			.081 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
XI	7/32 R ADDED, 1.468 DIM WAS 1-15/32 (2 PLACES)	2/23/65	AA	JZ			ALUMINUM		PLATE, MOUNTING (SHALLCROSS SWITCH)					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE 1:1		5052-H32	SRG	JCB	AMM 3/23/65		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'		TYPE & TEMPER HEAT TREAT. SPEC.		DRAWN CHECKED		FINAL APPROVAL	
TOLERANCES							CODE A		S404 YEL. IRIDITE		ELEC. DES. APP. MECH. DES. APP.		MS3877 Ø	