


HOLE	DESCRIPTION	REQ.
A	.191-.194 DIA.	4

MS3931

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPERIMENTAL RELEASE	8-19-64	X	SRG	
X ₁	METHOD OF DIMENSIONING CHANGED	8-28-64	X ₁	WB	
Ø	ORIGINAL RELEASE FOR PRODUCTION	8-31-64	Ø	J.H.	

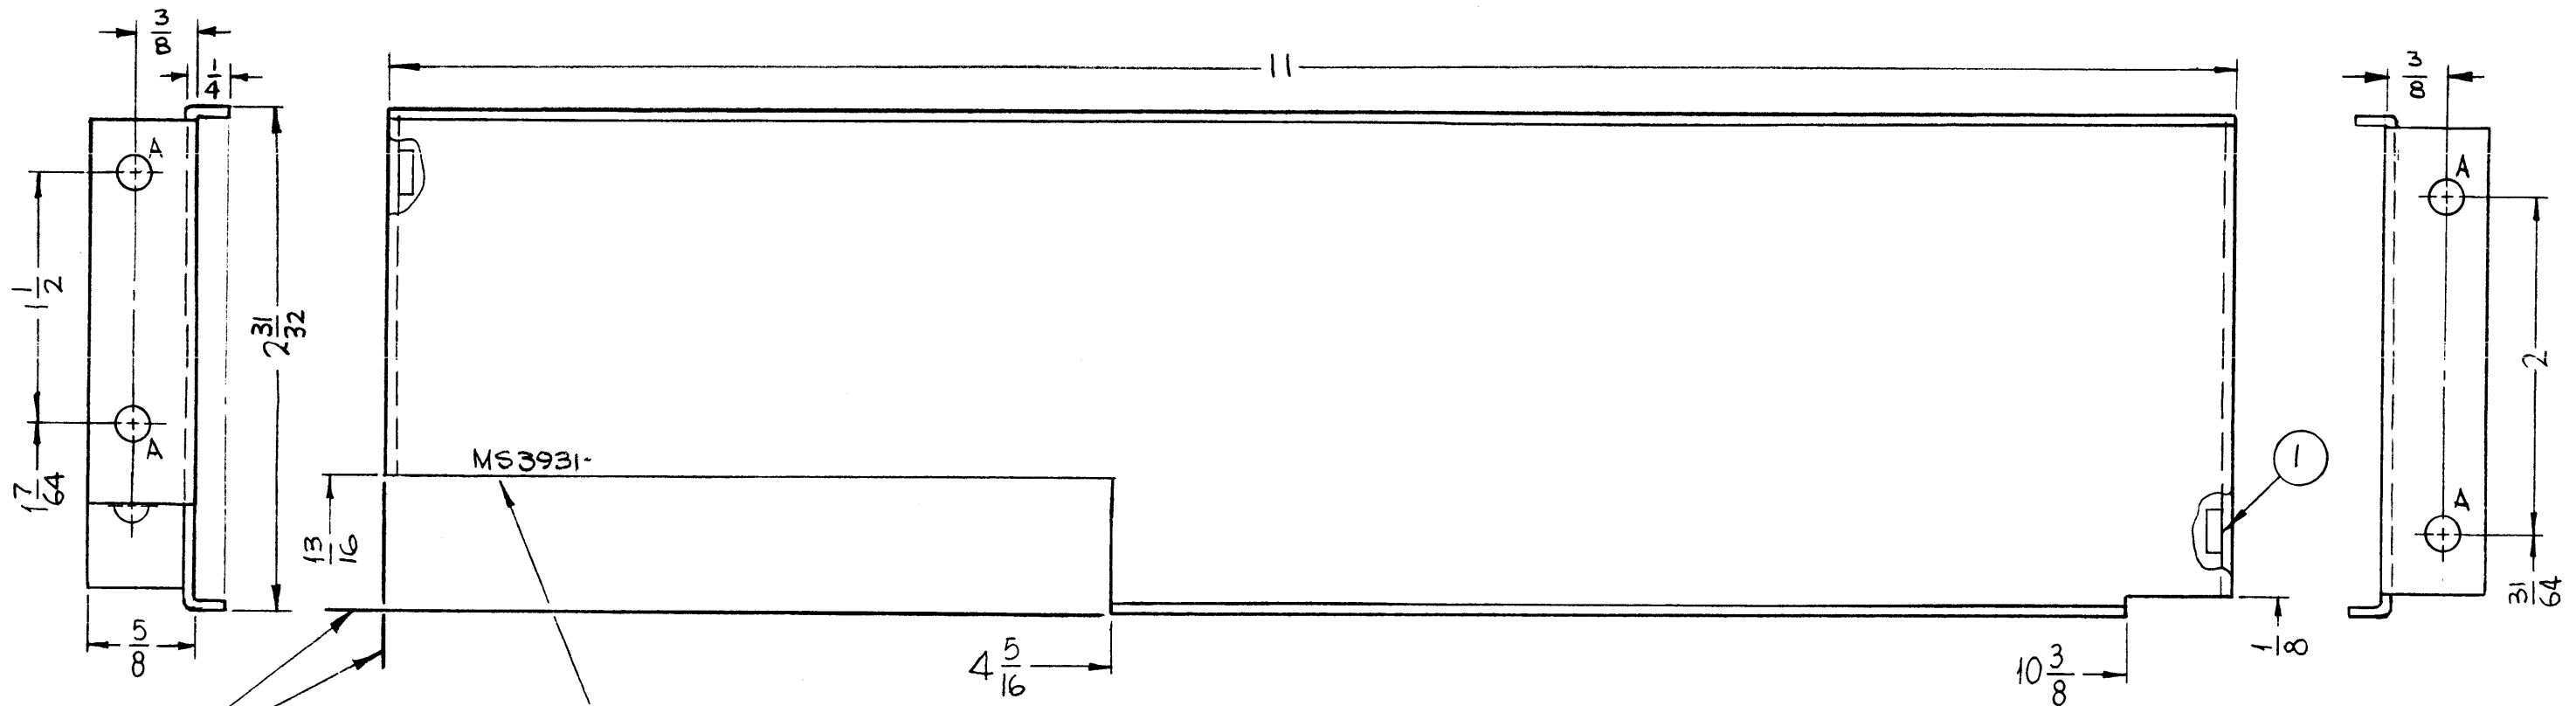

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

2	LFCA-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
1:1	A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

4	1	NT129-632-4	NUT, ROUND, SWAGE TYPE	A
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

M. GELLMAN LIST OF MATERIAL

MATERIAL: .064 THICK ALUMINUM 5052-H32
 FINISH: S404 YELLOW IRIDITE
 TITLE: THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK

SHIELD, P.C. CARD

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN: SRG	DATE: 8-19-64	FINAL APPROVAL: [Signature]	DATE:
DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005		CHECKED: [Signature]	DATE: 9-1-64	MS3931	
FRACTIONS: ± 1/64, ANGLES: ± 0° 30'		ELECT. DES.:	DATE:	Ø	
TOLERANCES:		MECH. DES.:	DATE:	SHEET	