| TMC P/N | QTY./UNIT | "A" HOLE .128 DIA. |
|---|---|---|
| MS3932-1 | 4 | ~~4~~ |
| MS3932-2 | 1 | 4 |

MS3932 A

**REVISIONS**

| SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
|---|---|---|---|---|---|---|
| X | EXPERIMENTAL RELEASE | 8-18-64 | X | SRG | | |
| $X_1$ | REQ. PER UNIT WAS 6 | 8.28.64 | $X_1$ | NB | | |
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 8-31-64 | Ø | J.L. | | |
| A | REVISED TO INCLUDE: "A" HOLES & RELOC. DIM, P/N CHART, SIDE VIEW & NOTE #4; ON B/M: ITS. (1) & (2) ADDED. | 1.8.65 | 13264 | D.F. | | |

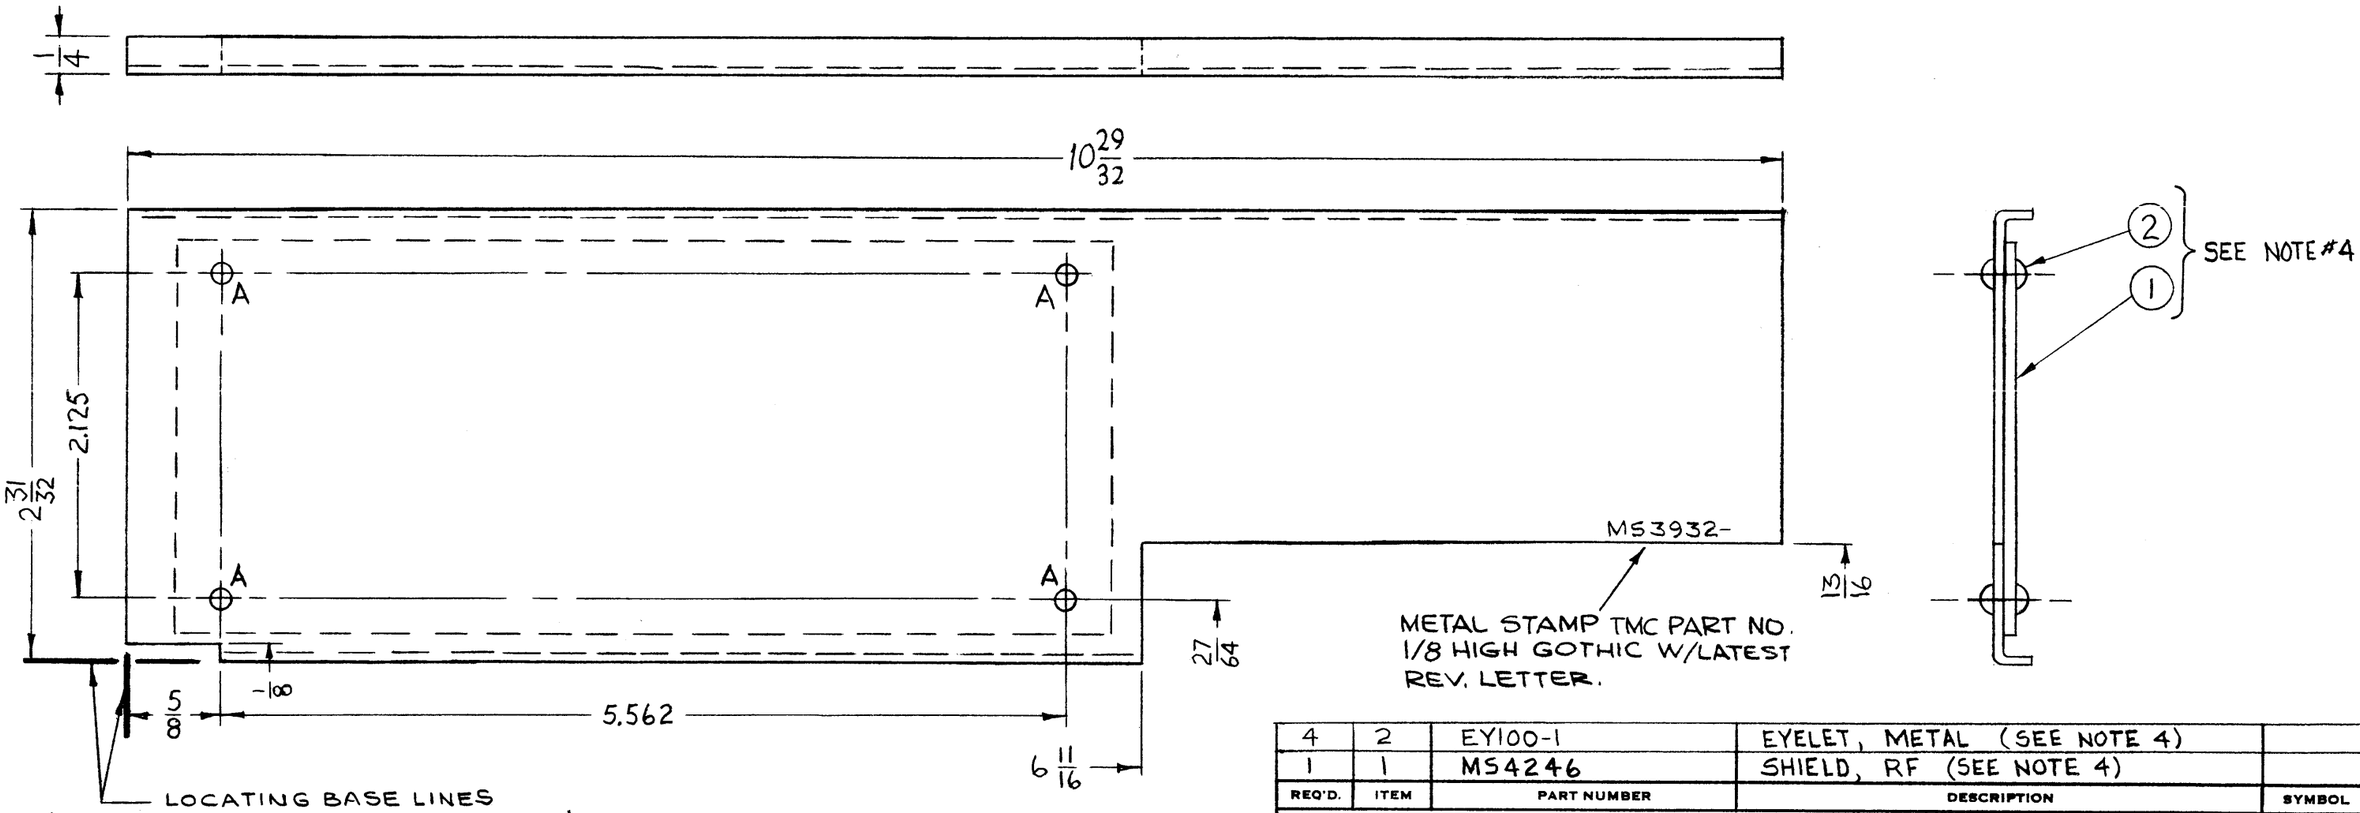


**UNLESS OTHERWISE SPECIFIED:**

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. ITEMS 1 & 2 USED ONLY ON MS3932-2

## NOTES

| REQ'D. | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| 4 | 2 | EY100-1 | EYELET, METAL (SEE NOTE 4) | |
| 1 | 1 | MS4246 | SHIELD, RF (SEE NOTE 4) | |

M. GELLMAN — LIST OF MATERIAL

MATERIAL: .064 THICK ALUMINUM 5052-H32

FINISH: S404 YELLOW IRIDITE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

| | LFCA-1 | |
|---|---|---|
| Q'T'Y./UNIT | MODEL USED ON | ASS'Y. NO. |
| SCALE: 1:1 | CODE: A | |

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

**THE TECHNICAL MATERIEL CORP.**
MAMARONECK, NEW YORK

TITLE: SHIELD, PC CARD

| | | | |
|---|---|---|---|
| DRAWN: SRG | DATE: 8-18-64 | FINAL APPROVAL | DATE |
| CHECKED: @ | DATE: 9-1-64 | | |
| ELECT. DES. | DATE | MS3932 | A |
| MECH. DES. | DATE | SHEET | REV. LTR. |

TMC F RM 1 9

REPROVEL NO. 440H 16107