


HOLE	DESCRIPTION	REQ
A	5/8 DIA	3
B	3/8 DIA	6
C	.191 - .194 DIA.	2

REQ. PER UNIT	USED ON			MS3941	A
	MODEL	ASS'Y. NO.	DATE		
4	TTR-10		7.23.64		

**NOTE:**  
 UNLESS OTHERWISE SPECIFIED:  
 1. USE MAT'L THICKNESS FOR MAX RADIUS ON ALL BENDS.  
 2. ANGULAR BENDS 90°  
 3. MOUNT INSERTS AFTER FINISHING.

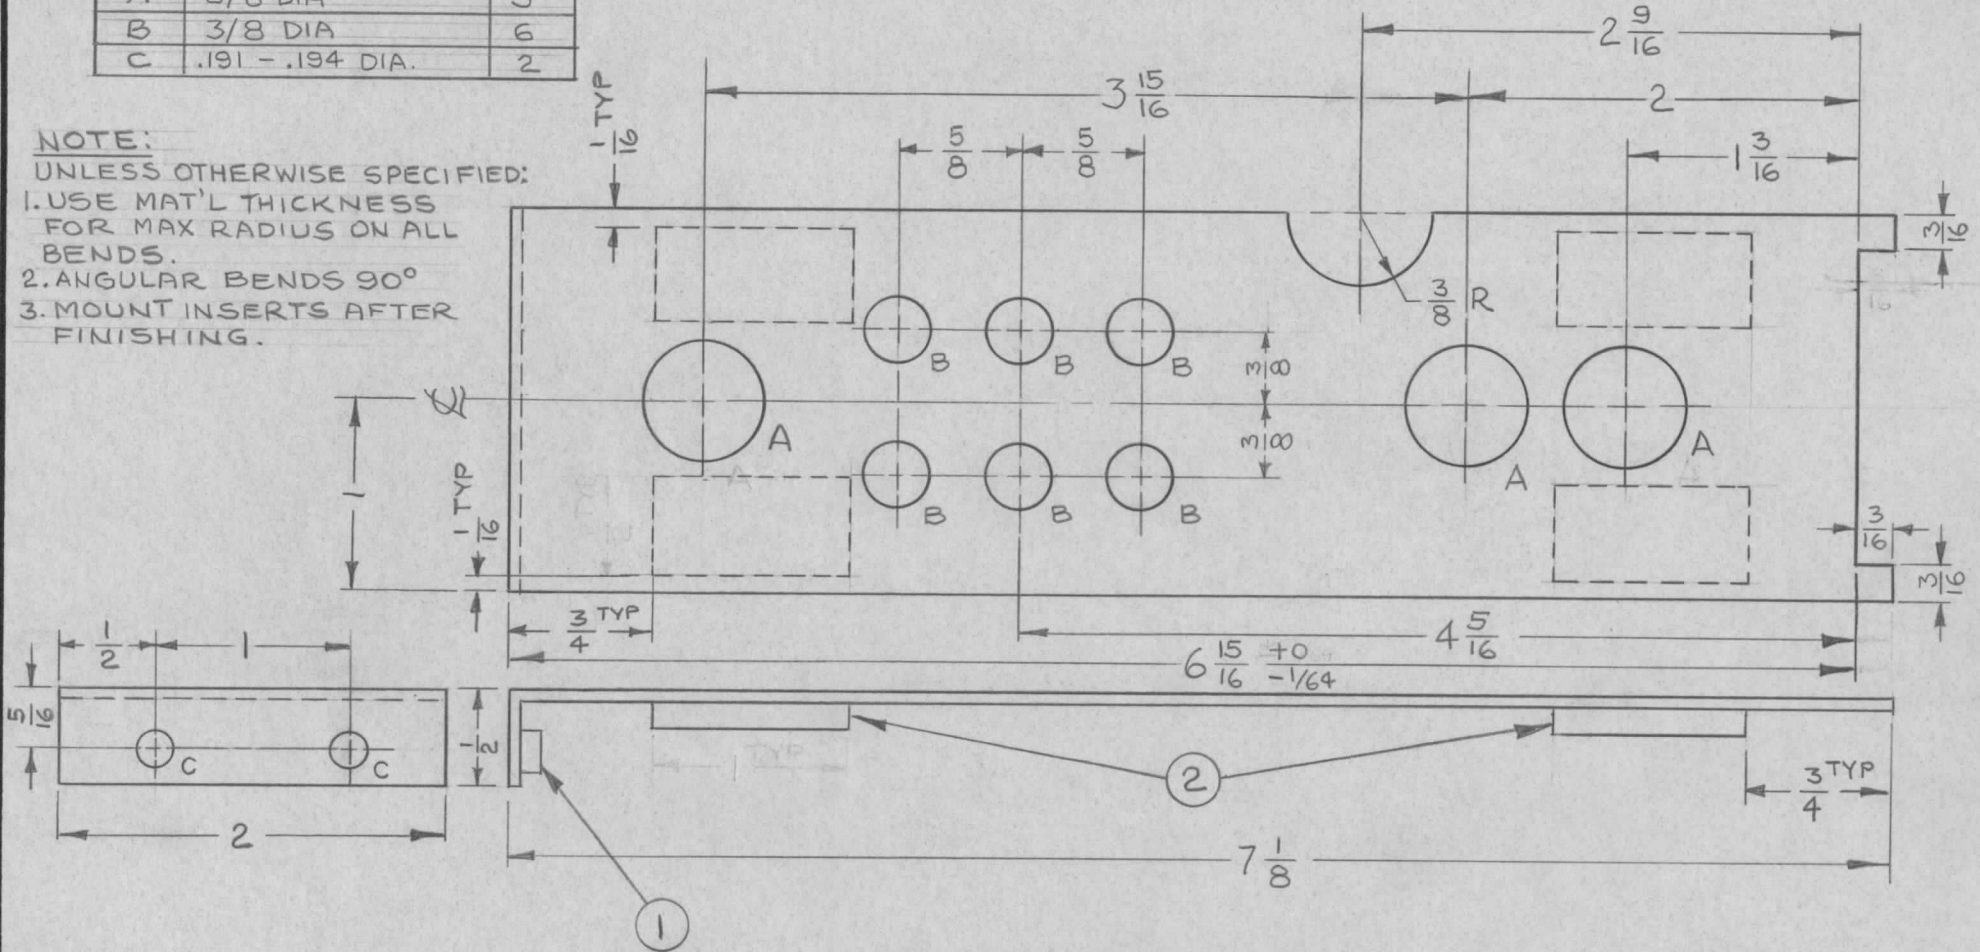

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	2	RY-121-8-6-1.00	STRIP, SPONGE RUBBER	
2	1	NT-129-632-4	NUT, ROUND, SWAGE TYPE	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	6 15/16 x 4 5/16 DIM. LINES RELOCATED TO BOTTOM OF CUTOUT	8.24.64	12156	WJB	RL	ROW
O	ORIGINAL RELEASE	7.24.64	-	WJB		

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES AND INCLUDE  
 CHEMICALLY APPLIED OR PLATED FINISHES

SCALE: 1:1

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005  
 FRACTIONS: ± 1/64, ANGLES: ± 0° 30'

TOLERANCES: A

.081 THK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
ALUMINUM		BRACKET, LOCKING			
		PA TANK			
5052	H32	WJB	@	RL	
S404-YELL. IRIDITE		DRAWN		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	
		MS3941		A	