



REQ. PER UNIT	USED ON			MS3970	∅
	MODEL	ASS'Y. NO.	DATE		
1	VLRB-1		6-12-64		


METAL STAMP TMC PART NO. 1/8, HIGH GOTHIC, W/LATEST REVISION LETTER.

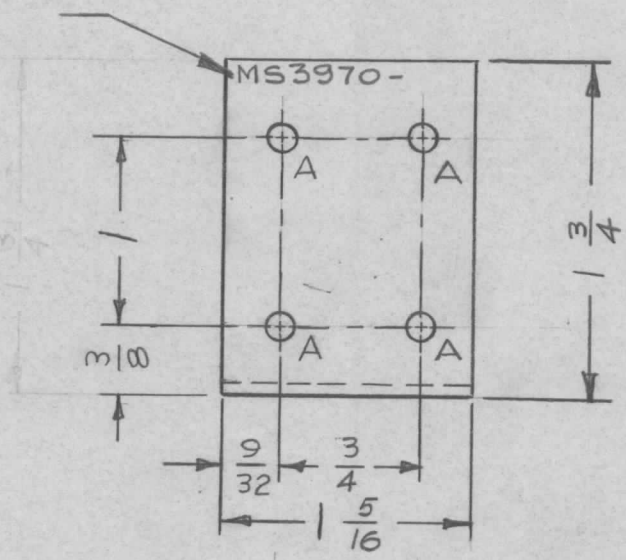

MOUNT IN "B" HOLES

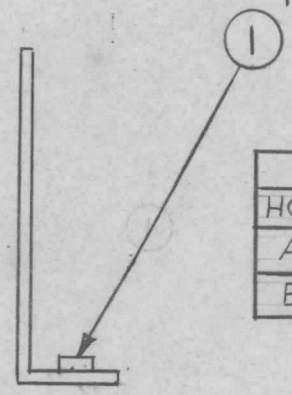

HOLE LEGEND		
HOLE	DIAMETER	REQ
A	5/32	4
B	.161 - .164	2

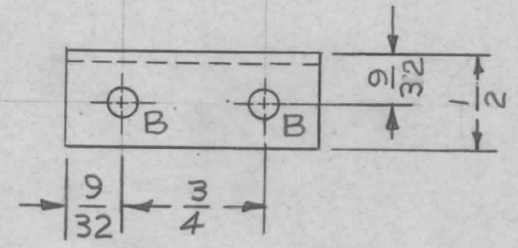

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90°.
  3. REMOVE ALL BURRS AND SHARP EDGES.

						2	1	NT129-440-4	NUT, ROUND, SWAGE TYPE	B
						REQ. ITEM		PART NO.	GELLMAN DESCRIPTION SK3136-MS-12	SYMBOL
0	ORIGINAL RELEASE FOR PRODUCTION	8.4.64	+	WB				.081 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X <sub>1</sub>	STOCK SIZE WAS .080	8.4.64	#	WB				STOCK SIZE	BRACKET, TRANSFORMER,	
X	EXPERIMENTAL RELEASE	6/12/64	X	A.M.				ALUMINUM	AUDIO	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		MATERIAL		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				5052-H32	a. Marino	@
								TYPE & TEMPER	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A				3404 YEL. IRIDITE	MECH. DES. APP.	MS3970
TOLERANCES								FINISH & SPEC. NO.	ELEC. DES. APP.	∅