


REQ. PER UNIT	USED ON			MS3974	Ø
	MODEL	ASS'Y. NO.	DATE		
5	VLRB-1		6-13-64		

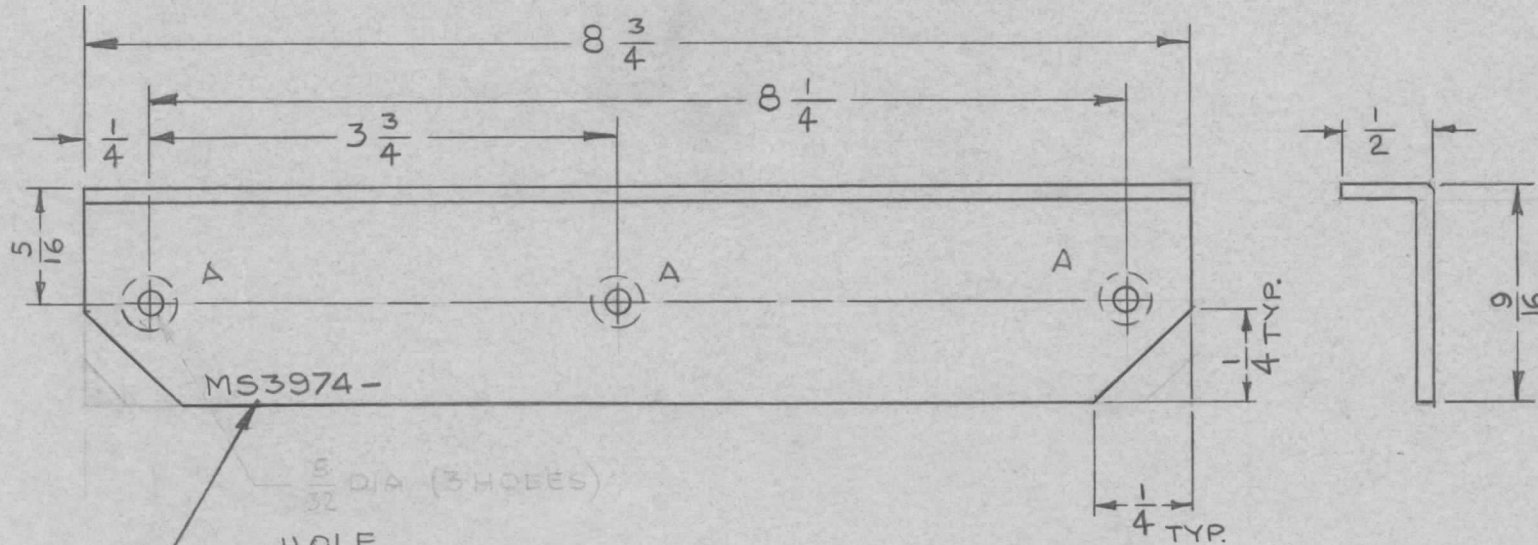

MS3974-

5/32 DIA (3 HOLES)

HOLE

A -.144 DIA & C'SINK 82°x .284 DIA.

METAL STAMP TMC PART NO. 1/8
HIGH GOTHIC, WITH LATEST
REVISION LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

ORIGINAL RELEASE FOR PRODUCTION				8.3.64	+	WB		REQ. ITEM	PART NO.	GELLMAN	DESCRIPTION SK3136-MS-16	SYMBOL	
X ₂	1/4 x 1/4 CUTOUT ADD.			7.8.64		WB		.062		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
X ₁	"A" HOLE WAS 5/32 DIA			7-1-64	1	GDL		.062		BRACKET, SUPPORT, P.C.			
X	EXPER. RELEASE			6-13-64	1	WB		ALUMINUM		VLRB-1			
SYM	DESCRIPTION			DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				SCALE				5052-H32		6.13.64	@	RJC	
				4				TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS		FRACTIONS		CODE		5404 YEL. IRIDITE		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS3974	Ø
.X ± .05		± 1/64		A									
.XX ± .01		ANGLES											
.XXX ± .005		± 0° 30'											