


|               |         |              |        |        |   |
|---------------|---------|--------------|--------|--------|---|
| REQ. PER UNIT | USED ON |              |        | MS3976 | A |
|               | MODEL   | ASS'Y. NO.   | DATE   |        |   |
| 5             | VLRB    | A3662-2-3-45 | 8-3-64 |        |   |
|               |         | A3681        |        |        |   |

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, W/LATEST REVISION LETTER.

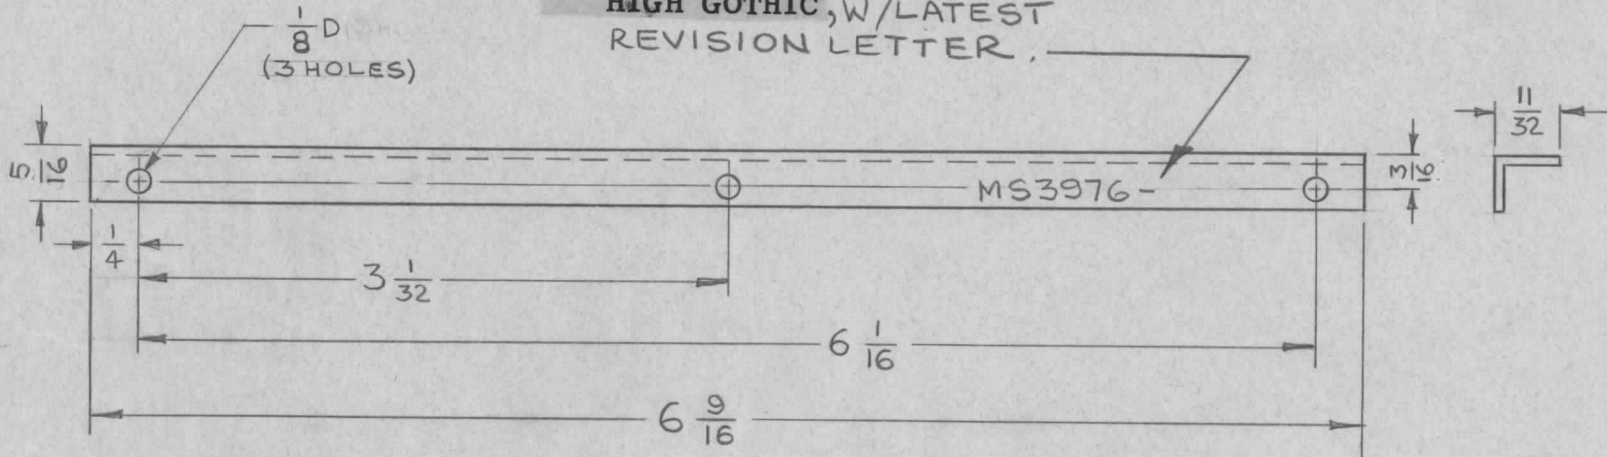

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

|   |                                 |   |         |        |         |           |                    |                   |  |                        |                |
|---|---------------------------------|---|---------|--------|---------|-----------|--------------------|-------------------|--|------------------------|----------------|
|   |                                 |   |         |        |         | REQ. ITEM | PART NO.           | T. KRUY           | DESCRIPTION SK 3136-MS-28                            | SYMBOL                 |                |
| A   | CLERICAL CHANGE                 | 1.26.65                                   | -       | 22     | @       |           | .062 THK           |                   | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK, NEW YORK | BRACKET, P.C. BOARD-RF |                |
| Ø   | ORIGINAL RELEASE FOR PRODUCTION | 8.3.64                                    | +       | WB     |         |           | STOCK SIZE         |                   |  |                        |                |
| X   | EXPER. RELEASE                  | 6.30.64                                   |         | WB     |         |           | ALUMINUM           |                   |  |                        |                |
| SYM   | DESCRIPTION                     | DATE                                      | CH. NO. | DRAFTS | CHECKER | ENG. APP. | MATERIAL           |                   |  |                        |                |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES |                                 | SCALE                                     |         | 1:1    |         |           | 5052-H32           |                   | WB 6.30.64   | @                      | RC             |
| DECIMALS<br>.X ± .05<br>.XX ± .01<br>.XXX ± .005  | TOLERANCES                      | FRACTIONS<br>± 1/64<br>ANGLES<br>± 0° 30' | CODE    | A      |         |           | TYPE & TEMPER      | HEAT TREAT. SPEC. | DRAWN  | CHECKED                | FINAL APPROVAL |
|   |                                 |   |         |        |         |           | S404 YELL. IRIDITE |                   | T.K.   | WB                     | MS3976 A       |
|   |                                 |   |         |        |         |           | FINISH & SPEC. NO. |                   | ELEC. DES. APP.                                      | MECH. DES. APP.        |                |