


REQ. PER UNIT	USED ON			MS3984	A
	MODEL	ASS'Y. NO.	DATE		
1	VLRB-1		8.7.64		

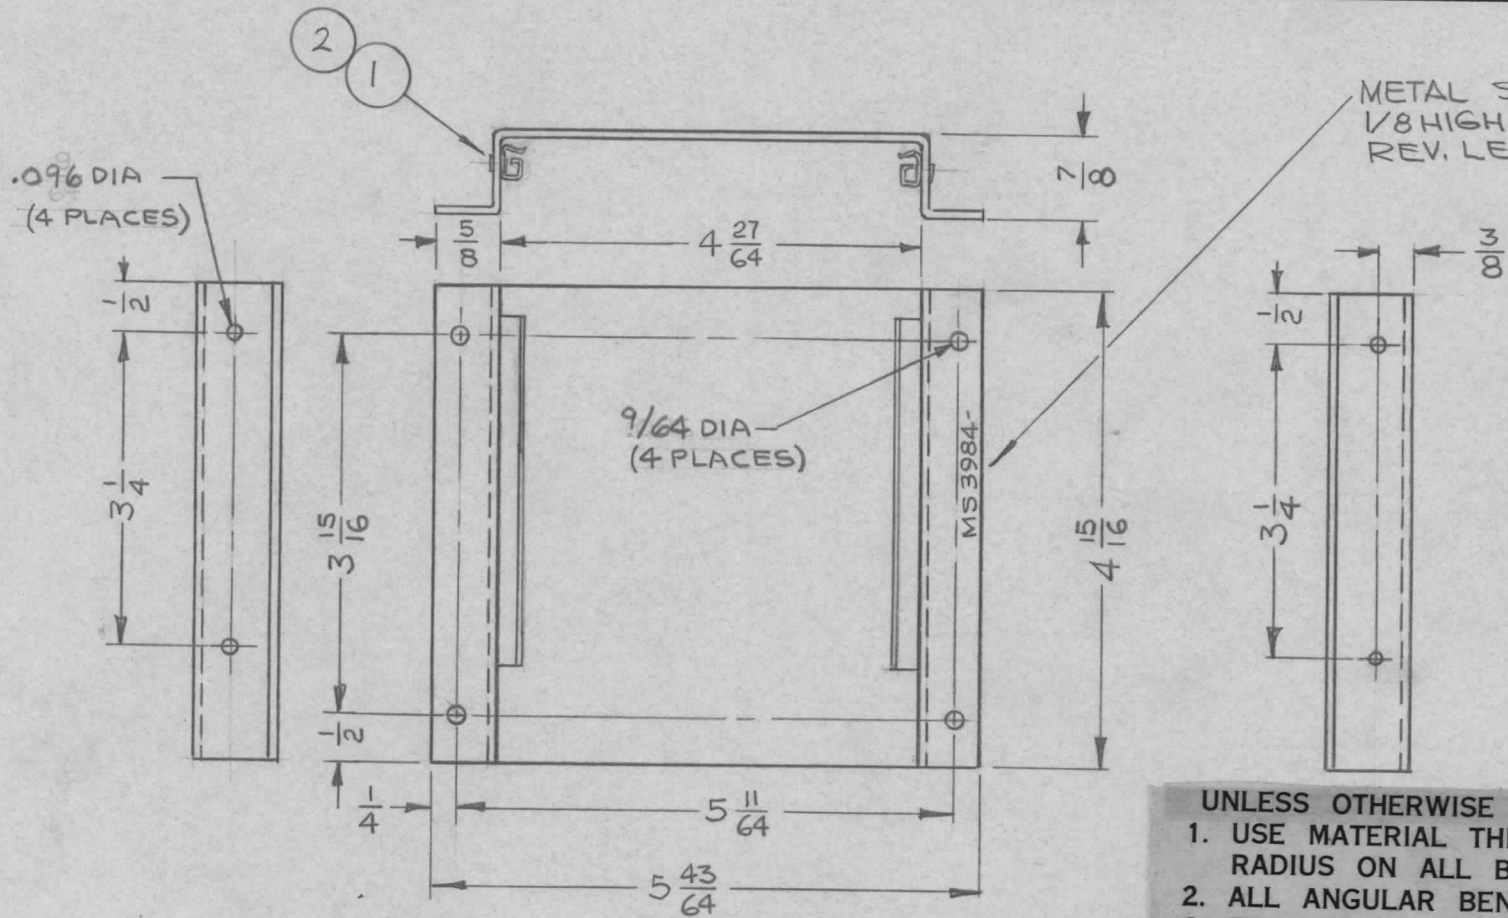

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT RETAINERS AFTER FINISHING

REF: LD1595

4	2	EY101-3	EYLET, ROLLED FLANGED	
2	1	CU157-1	RETAINER PC BOARD	
REQ. ITEM	PART NO.		GELLMAN	DESCRIPTION
.062 THK			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			BRACKET,	
MATERIAL			DUMMY CARD	
5052-H32			WB	@
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
5404 YELL. IRIDITE		WA	MPZ	MS3984
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	A

A	REF LD1595 ADDED	9-3-64	+	WJ		
O	ORIG. RELEASE FOR PROD.	8-18-64	0	SEG		
X	EXPER. RELEASE	8.7.64	+	WB		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:2			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		