
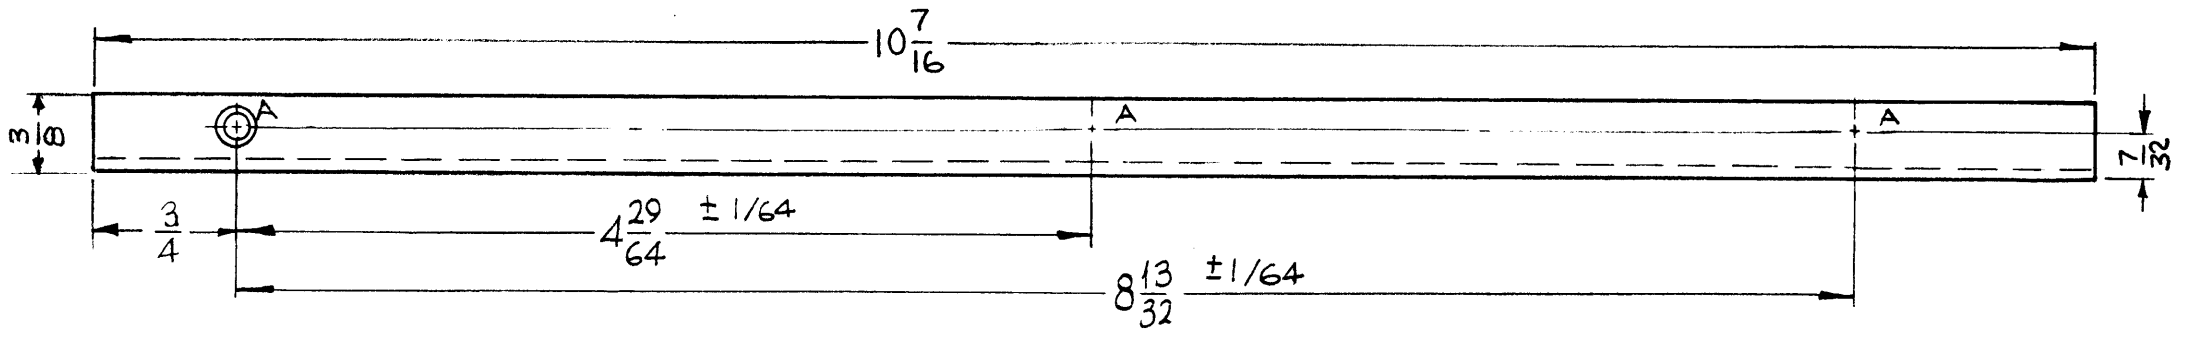


MS3994 A

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	8-17-64	X	SRG		
X ₁	DIMENSIONING METHOD CHANGED	8-28-64	X ₁	JB		
Ø	ORIGINAL RELEASE FOR PRODUCTION	8-31-64	Ø	JA		
A	"A"-HOLES WERE .125 DIA	10-30-64	12814	JB	@	AK

METAL STAMP TMC PART NO
1/8 HIGH GOTHIC W/LATEST
REV. LETTER.

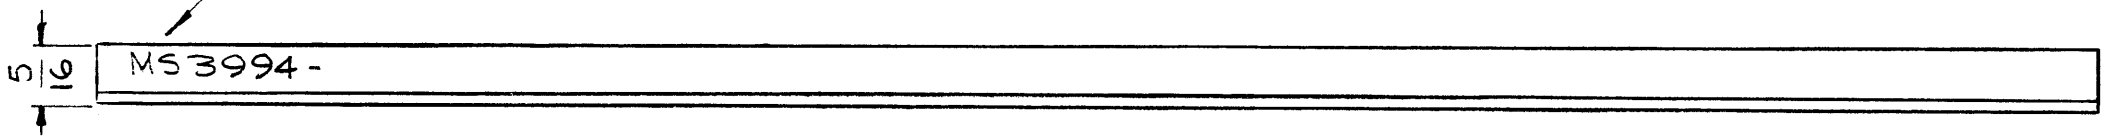

HOLE	DESCRIPTION	REQ
A	.120D. CSK 82° TO .230 DIA	3

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

NOTES

8	LFCA-1	
QTY./UNIT	MODEL USED ON	ASSY. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
M. GELLMAN		LIST OF MATERIAL		
MATERIAL .064 THICK ALUMINUM 5052-H32			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH S404 YELLOW IRIDITE			TITLE STIFFENER .PC CARD SIDEBAND UNIT 5007	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN SRG	DATE 8-17-64
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			CHECKED [Signature]	DATE 9-1-64
FRACTIONS ± 1/64 ANGLES ± 0° 30'			FINAL APPROVAL [Signature]	
TOLERANCES			DATE	
MECH. DES.			DATE	
			MS3994 A	
			SHEET	
			REV. LTR.	