

MS3998 A



REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPER. RELEASE	8-17-64	X			
X1	7/16 WAS 9/16	8/24/64		WB	JL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-28-64	Ø	2L		
A	1/4" HOLE AND DIM 1-1/4, 1 ADDED	8/20/65	14665	H.V.V.	JL	MM

OPPOSITE VIEW IDENTICAL

① MOUNT IN ALL "B" HOLES.

HOLE	DESCRIPTION	REQ
A	3/16 DIA.	3
B	.250-.253 DIA.	6
C	.144 DIA HOLE, C'SINK 82° TO .284 DIA.	12
D	SEE DETAIL	6

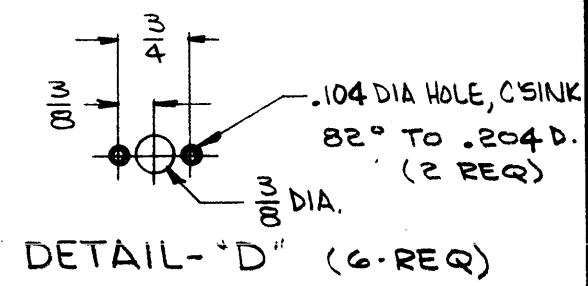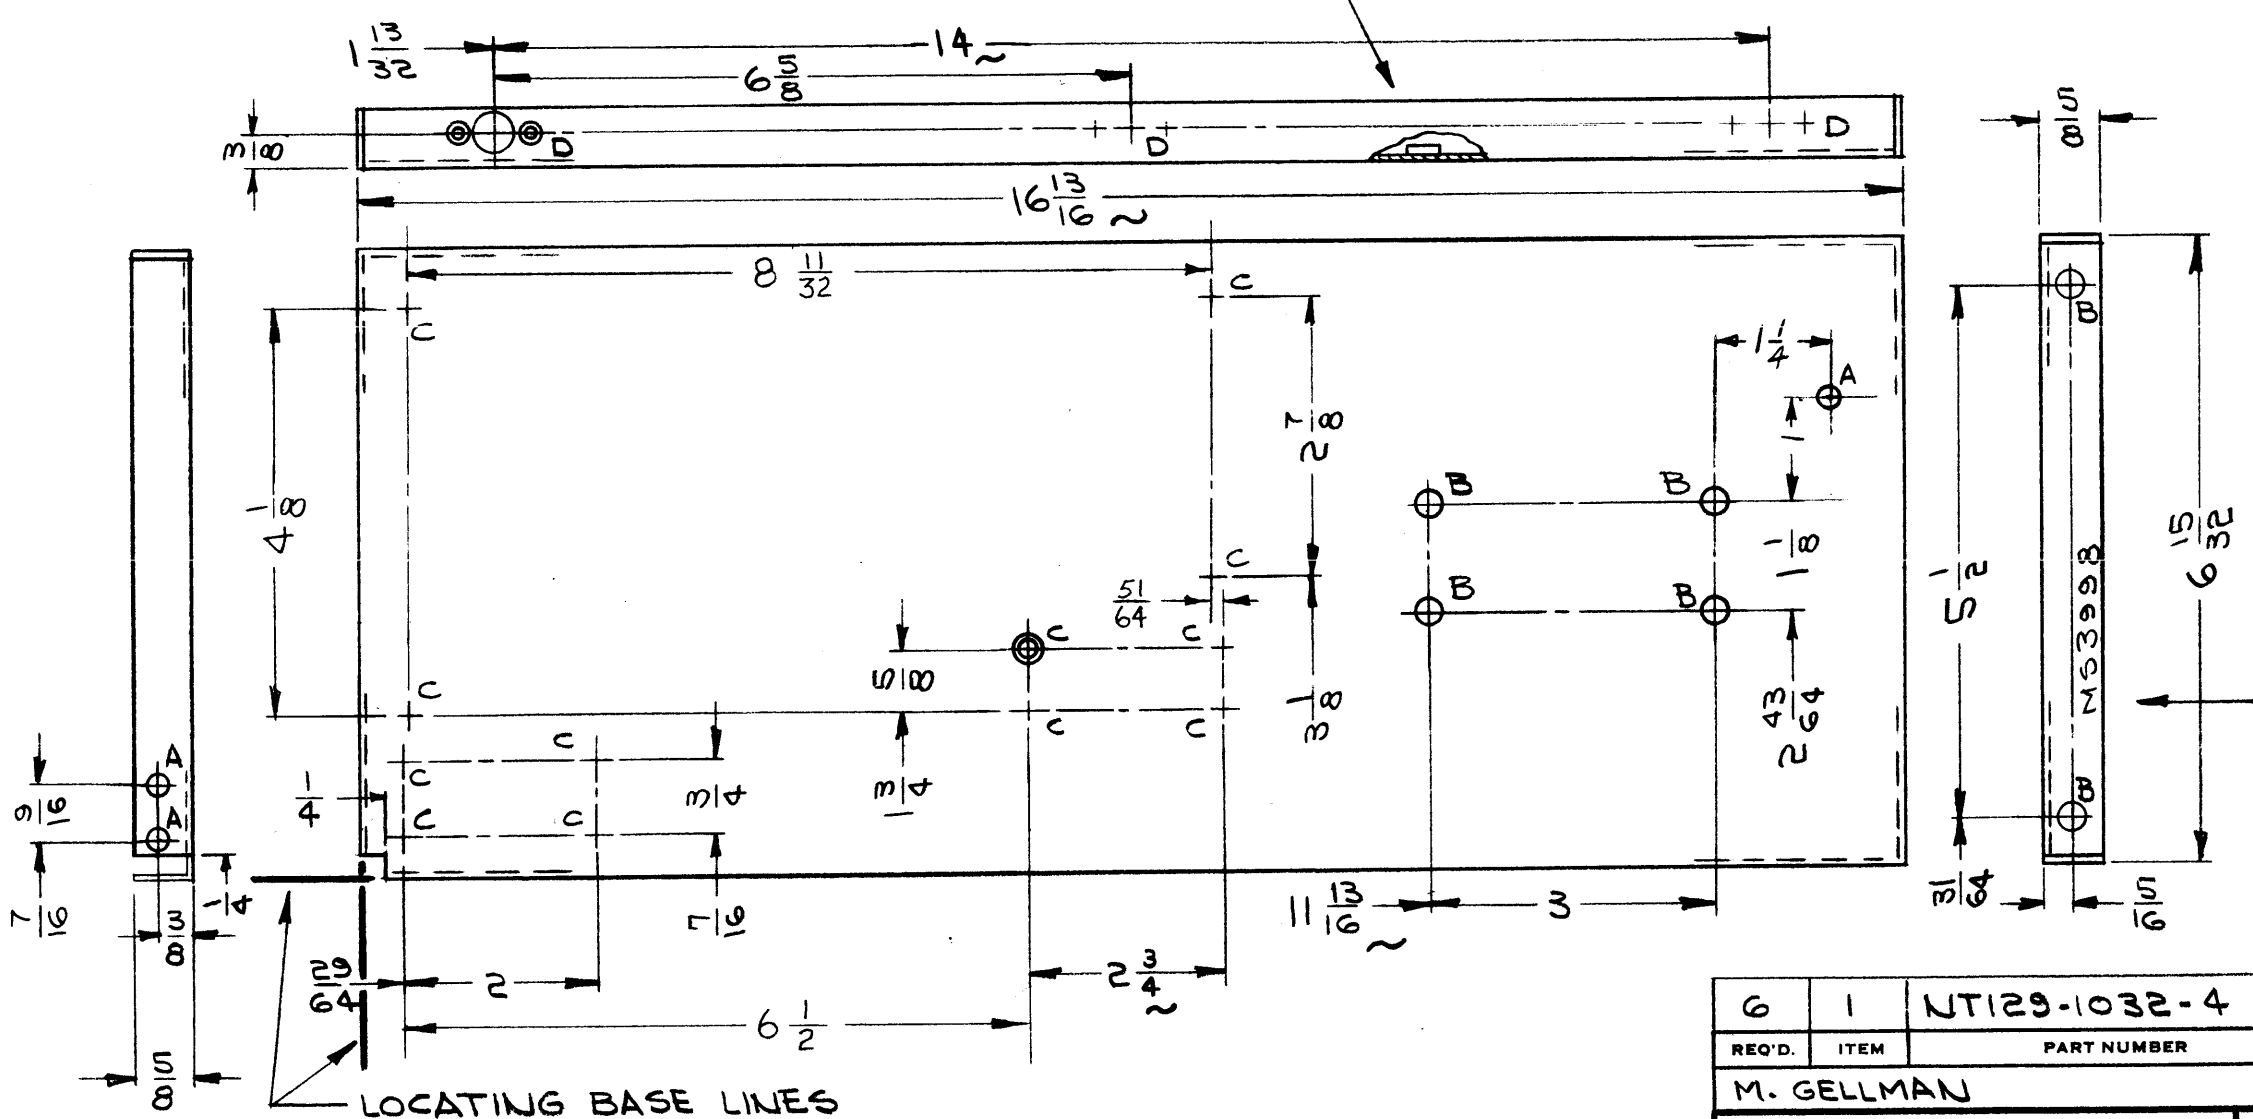

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

1	LFSB-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:2	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

6	1	NT129-1032-4	NUT, ROUND, SWAGE TYPE	B
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

M. GELLMAN	LIST OF MATERIAL
MATERIAL .064, ALUMINUM 5052-H32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
FINISH 5A04 YELLOW IRIDITE	TITLE PLATE, SIDE-LEFT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>G. Jansen</i>	DATE 8-17-64	FINAL APPROVAL <i>RJC</i>	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CHECKED <i>Ø</i>	DATE 9-15-64		
		ELECT. DES.	DATE	MS3998	A
		MECH. DES. <i>M. Jansen</i>	DATE 9-28-64	SHEET	REV. LTR.