| REVISIONS | | | | | | |
|---|---|---|---|---|---|---|
| SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
| X | EXPERIMENTAL RELEASE | 8-25-64 | X | G Lucas | | |
| X1 | ONE "A" HOLE ADDED - THK. WAS .081<br>NOTE 5 ADDED | 9-3-64 | | G.D.L | | |
| X2 | B HOLES WAS .177 DIA. | 9-22-64 | X | SRC | | |
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 9.28.64 | Ø | G L. | | |

MS4000 Ø

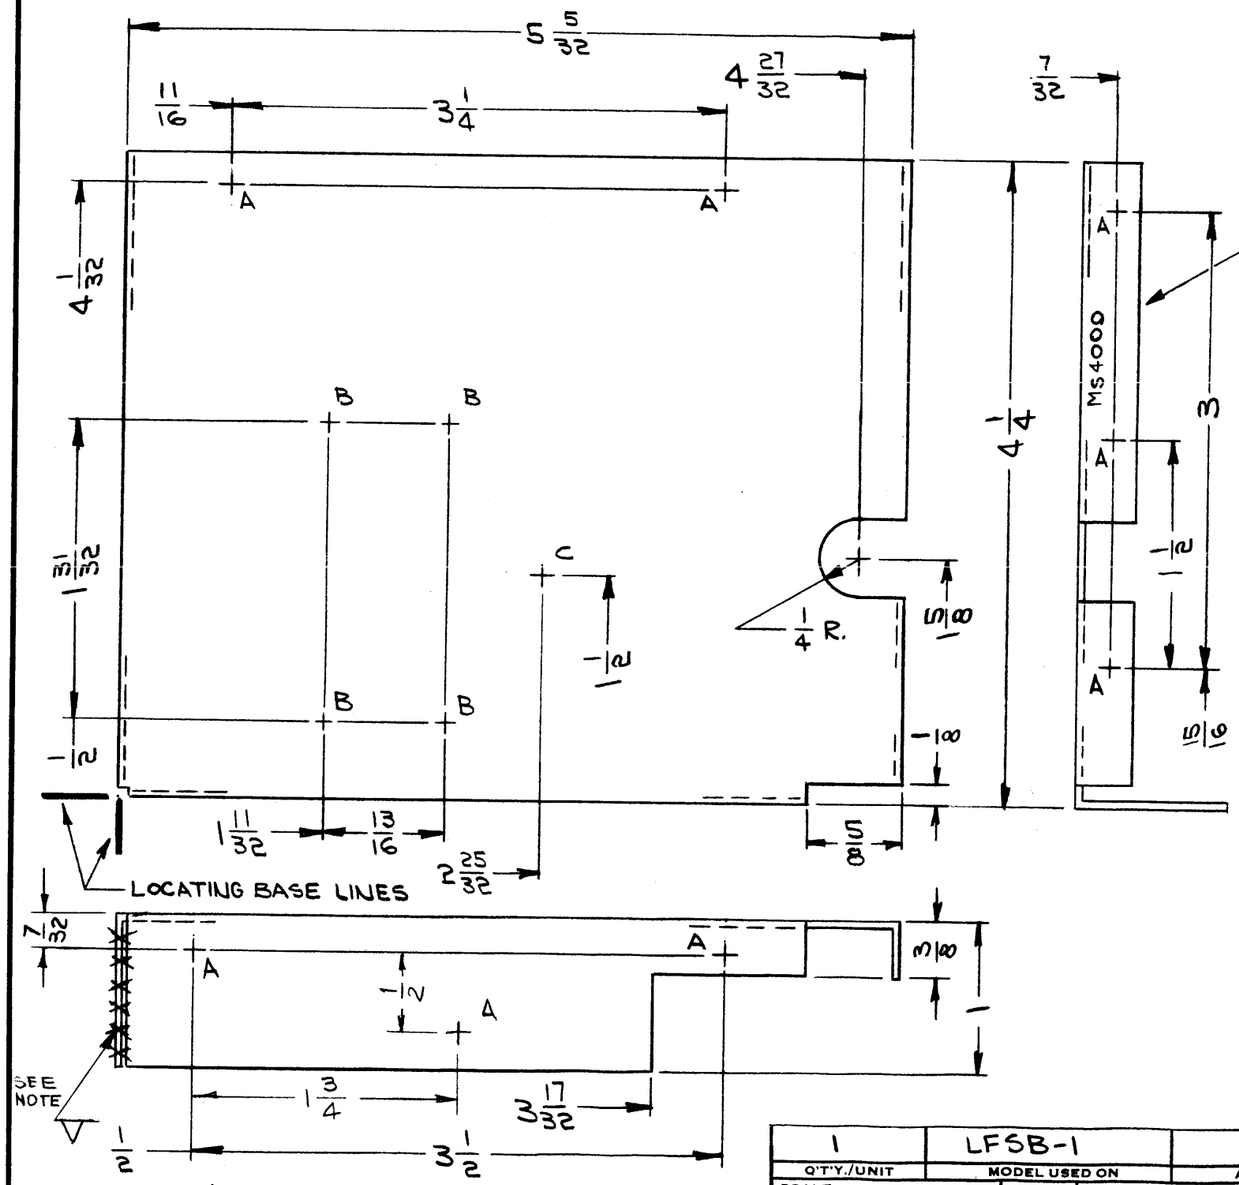


| HOLE | DESCRIPTION | REQ. |
|---|---|---|
| A | 5/32 DIA. | 8 |
| B | 3/16 DIA. | 4 |
| C | 1/2 DIA. | 1 |

**UNLESS OTHERWISE SPECIFIED**

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING
5. * DENOTES FILLET WELD

**NOTES**

| REQ'D. | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| GELLMAN | | LIST OF MATERIAL | | |

| | |
|---|---|
| 1 | LFSB-1 |
| Q'T'Y./UNIT | MODEL USED ON |
| SCALE 1:1 | CODE A |
| ASS'Y. NO. | |

MATERIAL .064 ALUMINUM 5052-H32

FINISH S404 YELLOW IRIDITE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: BRACKET, SUPPORT (POWER SUPPLY)

| | | | |
|---|---|---|---|
| DRAWN G Lucas | DATE 8-25-64 | FINAL APPROVAL RDR | DATE |
| CHECKED @ | DATE 9-15-64 | | |
| ELECT. DES. | DATE | MS4000 | Ø |
| MECH. DES. G Lucas | DATE 9-27-64 | SHEET | REV. LTR. |

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.