


REQ. PER UNIT	USED ON			MS4009 \emptyset
	MODEL	ASS'Y. NO.	DATE	
11	LFSB-1		8-28-64	

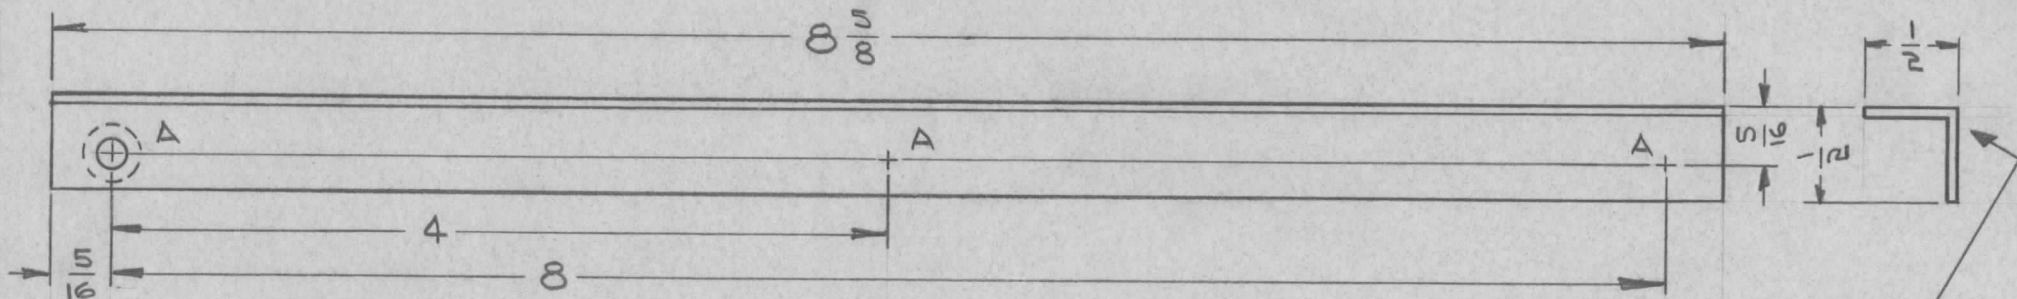

METAL STAMP TMC
PART NO. 1/8 HIGH GOTHIC,
WITH LATEST REVISION
LETTER, ON REAR.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

HOLE	DESCRIPTION	REQ.
A	.144 DIA. HOLE, C'SINK 82° TO .284 DIA, ON REAR. (6-32)	3

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	GELMAN	DESCRIPTION	SYMBOL	
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	9.28.64	\emptyset	g.f.				.064		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXP RELEASE	8-28-64	X	g.h.m.				ALUMINUM		SUPPORT, PRINTED CIRCUIT		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1					5052-H32		g. Swan @	RJC	
DECIMALS	TOLERANCES	FRACTIONS	CODE	A				5404-YELLOW IRIDITE				MS4009 \emptyset
.X \pm .05		\pm 1/64					FINISH & SPEC. NO.					
.XX \pm .01		ANGLES										
.XXX \pm .005		\pm 0° 30'										