TMC P/N	A	B	C	D	NO. OF 1-3/8 DIA. COMPONENTS	REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
MS 4050-1	4-3/16	5-1/16	4-5/8	1-11/32	3	2	RTMU-1	A3909	10-22-64
MS4050-2	2-13/16	3-11/16	3-1/4	1-11/32	2	1	RTMU-1	A3909	10-22-64
MS4050-3	1-7/16	2-5/16	1-7/8	1-11/32	1	1	RTMU-1 RSBA-1	A3909	2-19-65
MS 4050-4	1-7/16	2-5/16	1-7/8	—	———	1	CMR-1 CMRA-1		3-6-67

MS4050 C

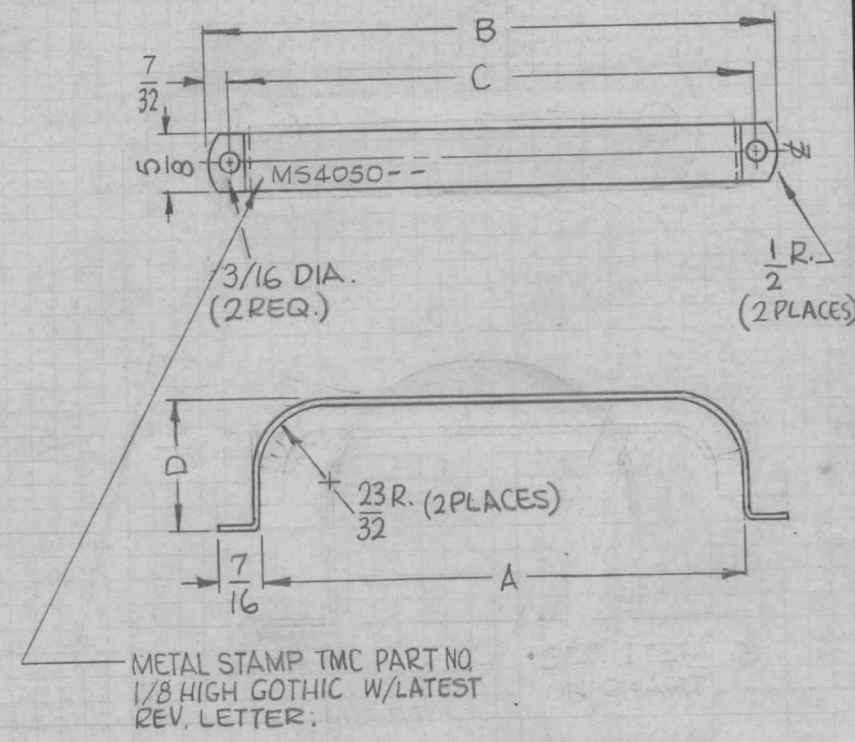

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	-4 'B' DIM W/2 DEL. 'D' DIM.	1-13-73	20970	GE	EB	EP
B	COMPLETELY REVISED	9.11.67	18470	H.G		OP
A	MS4050-3 & COMPONENT COL, ADD. TO TMC CHART; IT. 3 ADD. TO B/M.	3-3-65	13607	RL	JCB	W.J.
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-19-65	Ø	RL		
X	EXP. RELEASE	10-22-64	X	SRG		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —"

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.
		#20(.0359) GA.

STOCK SIZE: STEEL

MATERIAL: COLD ROLLED — TYPE & TEMPER — HEAT TREAT. SPEC.

FINISH & SPEC. NO.: S105 CADMIUM PLATE

EATON

DESCRIPTION: THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK

BRACKET, MTG, CAPACITOR

SYMBOL

DRAWN	CHECKED	FINAL APPROVAL
SRG	W.JORDAN 1/19/65	MS4050 C

ELEC. DES. APP. — MECH. DES. APP.

CURRENCY NO. 140M