


REQ. PER UNIT	USED ON			MS4051	⊗
	MODEL	ASS'Y. NO.	DATE		
1	RTMU-1	A3908	10-22-64		
1	RTPA-1	A3684	10-22-64		

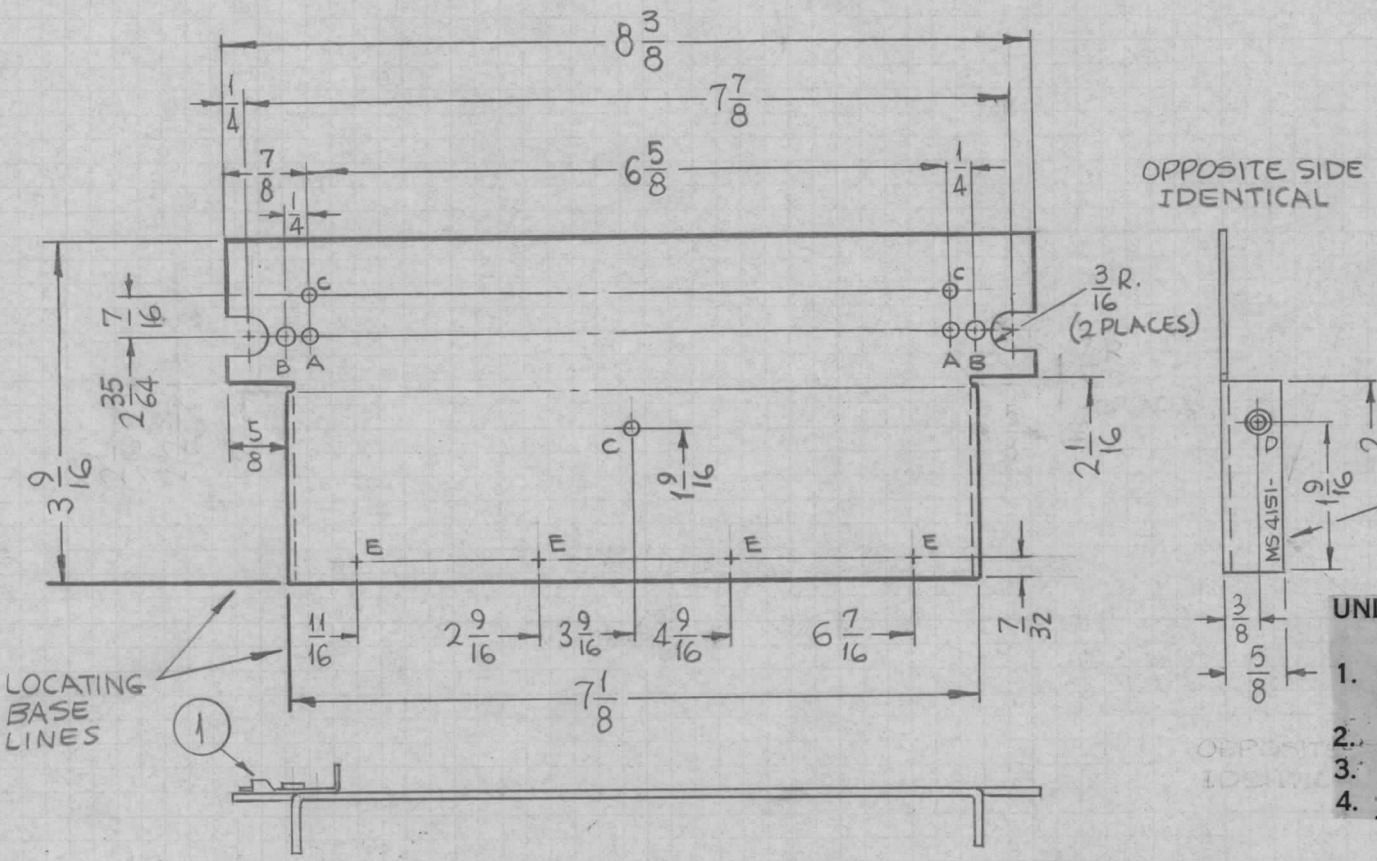

HOLE	DESCRIPTION	REQ.
A	№ 29 (.1360) DR.	2
B	5/32 DIA.	2
C	1/8 DIA.	3
D	.120 DIA. & C'SINK 82° X .230 DIA.	2
E	9/64 DIA.	4

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT FASTENERS AFTER FINISHING IN "A" & "B" HOLES.

							2	1	FS 117-4	FASTENER, SNAP SLIDE, SET	A&B				
							REQ.	ITEM	PART NO.	EATON	DESCRIPTION	SYMBOL			
							.064 THK			THE TECHNICAL MATERIEL CORP.					
							ALUMINUM			MAMARONECK, NEW YORK					
⊗	ORIGINAL RELEASE FOR PRODUCTION	1-18-65	⊗	SRG	J.M.		COVER, P.C. CARD BIN								
X	EXP. RELEASE	10-22-64	X	SRG											
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1/2:1			5052-H32		SRG						
TOLERANCES		FRACTIONS		CODE		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
.X ± .05		± 1/64		A		S404 YELLOW IRIDITE				F. E. Eaton		W. J. Jorgensen		MS4051	
.XX ± .01		ANGLES								1/18/65		1/18/65		⊗	
.XXX ± .005		± 0° 30'								ELEC. DES. APP.		MECH. DES. APP.			