


REQ. PER UNIT	USED ON			MS 4054
	MODEL	ASS'Y. NO.	DATE	
1	RTTD-1	A3703	9-28-64	Ø

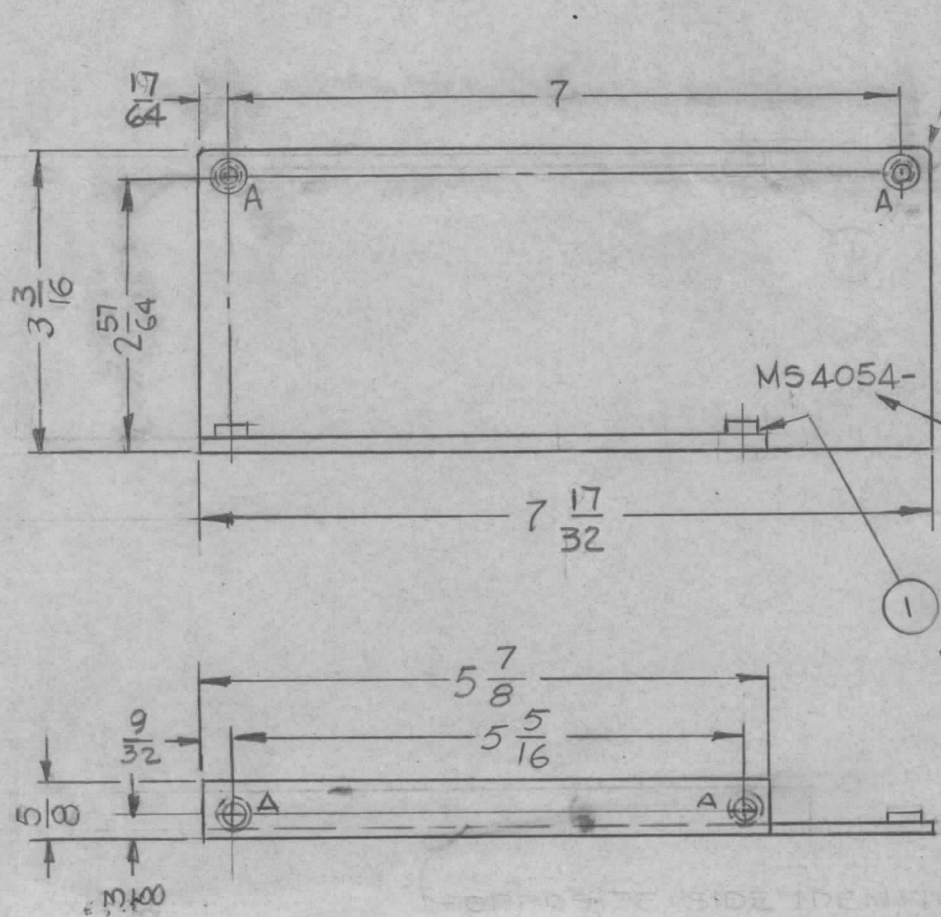

HOLE	DESCRIPTION	REQ.
A	.221 - .224 DIA	4

METAL STAMP TMC P/NO W/LATEST REV. LETTER 1/8 GOTHIC.

1 MOUNT IN ALL "A" HOLES

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING

Ø	ORIGINAL RELEASE FOR PRODUCTION	2.10.65	Ø	2 F.	GCS	4	1	NT129-832-4	NUT, PLAIN, SPLINE	A					
X2	17/64 WAS 9/32, 7/32 WAS 7/16, 3/8 WAS 5/16	10.14.64	X2	WB	SM, 01/11/64	REQ. ITEM		PART NO.		EATON	DESCRIPTION	SYMBOL			
X1	5/8 WAS 17/32, 5/16 WAS 1/4	10-1-64	X1	SRG		STOCK SIZE		ALUMINUM		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
X	EXP. RELEASE	9-28-64	X	G.D.L.		MATERIAL		5052-H32		BRACKET, MTG, SUPPORT (RELAY PLATE)					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES.		SCALE	1:2		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		S404 YEL. IRIDITE		G.D.L. 9/28/64		W. JORDAN 2/8/65		MS 4054 Ø	
						FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.					