


REQ. PER UNIT	USED ON			MS4089	Ø
	MODEL	ASS'Y. NO.	DATE		
2	RTIA-1	A 4065	10-28-64		

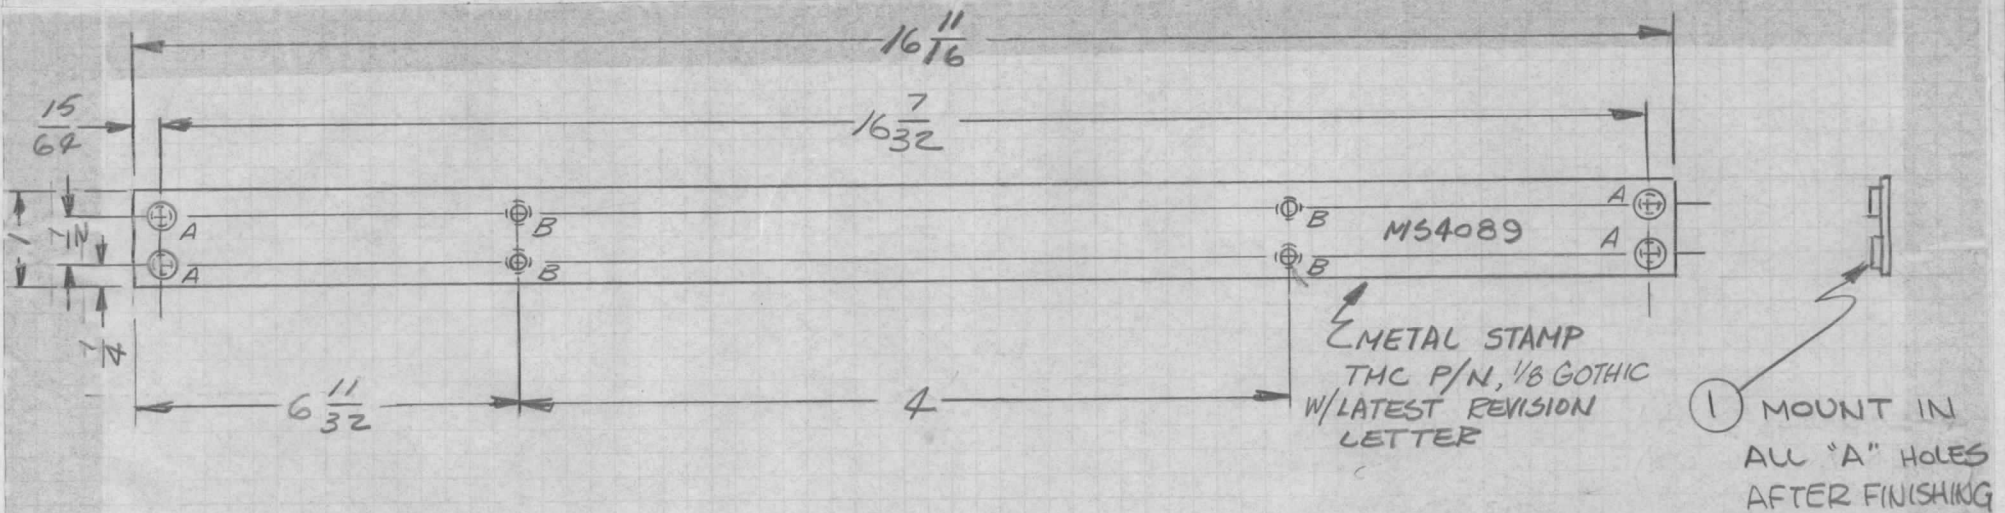

NOTE:
1- REMOVE ALL BURRS & SHARP EDGES.

HOLE LEGEND		
HOLE	DESCRIPTION	REQ'D
"A"	.191-.199 DIA	4
"B"	.144 DIA & C'SINK 82° X.284 DIA, ON REAR AS SHOWN	4

4	1	NT129-632-4	NUT, PLAIN, SPLINE			A	
REQ. ITEM	PART NO.		EATON			DESCRIPTION	SYMBOL
Ø		ORIGINAL RELEASE FOR PRODUCTION	2.8.65	Ø	JL	JM	W.N.
X1		6 1/32 DYM WAS 5 19/32 5 4 WAS 5 1/2	10/29/64	X	JL	JM	W.N.
SYM	DESCRIPTION		DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE		4		
DECIMALS		FRACTIONS		CODE		TOLERANCES	
.X ± .05		± 1/64		A		ANGLES ± 0° 30'	
.XX ± .01							
.XXX ± .005							
5052-H32		4		JL		JCB RAL	
TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED	
3404 YELLOW IRDITE		2/8/65		W. JORDAN		2/8/65	
FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		MS4089	