


MS4090

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPER. RELEASE	10-26-64	X	JL	JM	
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-10-65	Ø	JL	JOB	

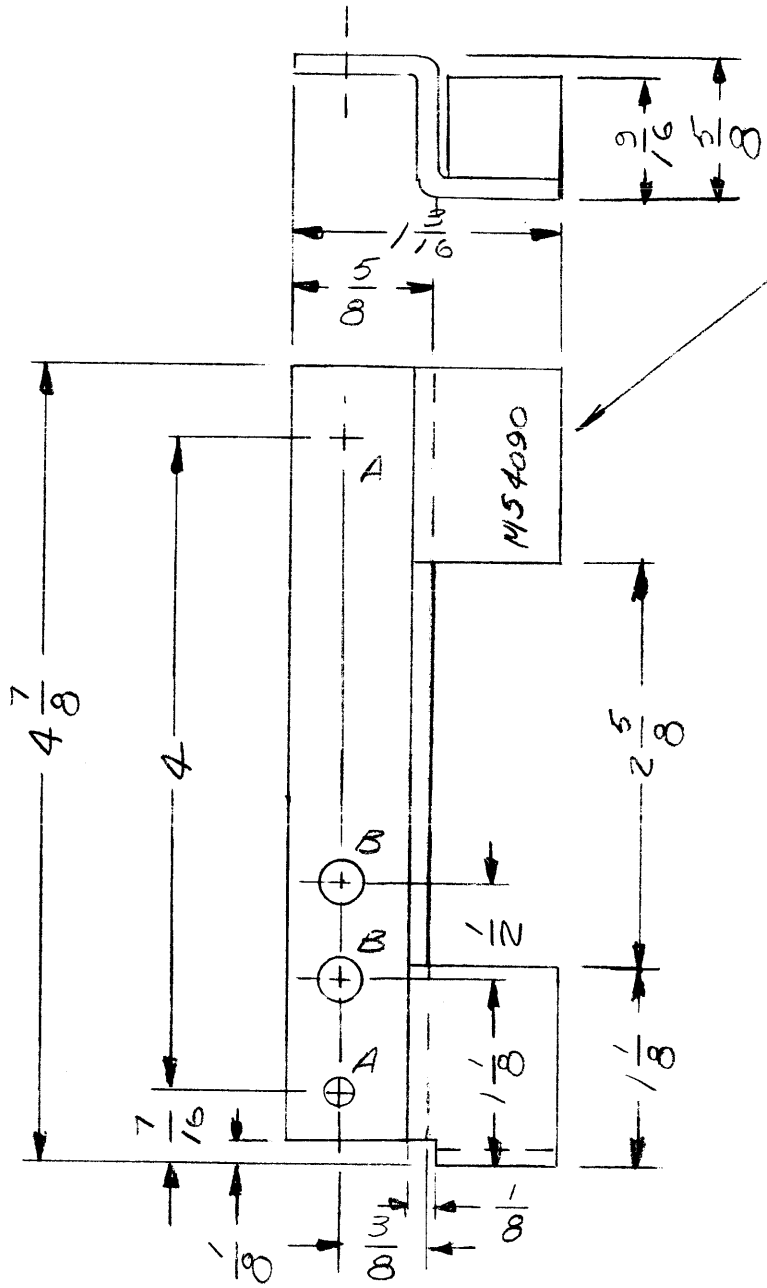

METAL STAMP TMC
P/N 1/8 HIGH GOTHIC
W/LATEST REVISION
LETTER (MS4090-* -)

HOLE LEGEND

HOLE	DESCRIPTION	REQ'D
"A"	3/16 DIA	2
"B"	1/4 DIA	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

PART NO.	DESCRIPTION
MS4090-1	AS DRAWN
MS4090-2	OPPOS HAND

1 EA.	RT1A-1	A4062
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
	A	

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	EATON		LIST OF MATERIAL	SK-3071-MS-22
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE		
-081 THK ALUMINUM 5052-H32		BRACKET MTG FILTER		
YELLOW IRIDITE 5402				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL
		JL	2/8/65	
		CHECKED	DATE	
		JM	2/8/65	
		ELECT. DES.	DATE	
		H. E. Sator	2/8/65	
		MECH. DES.	DATE	
		W. JORDAN	2/8/65	
DECIMALS		FRACTIONS		
.X ± .05		± 1/64		
.XX ± .01		ANGLES		
.XXX ± .005		± 0° 30'		
TOLERANCES				
		SHEET		REV. LTR.
		MS4090		Ø