REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4091	Ø
2 EA	RTIA-1	SEE CHART	1-22-65		

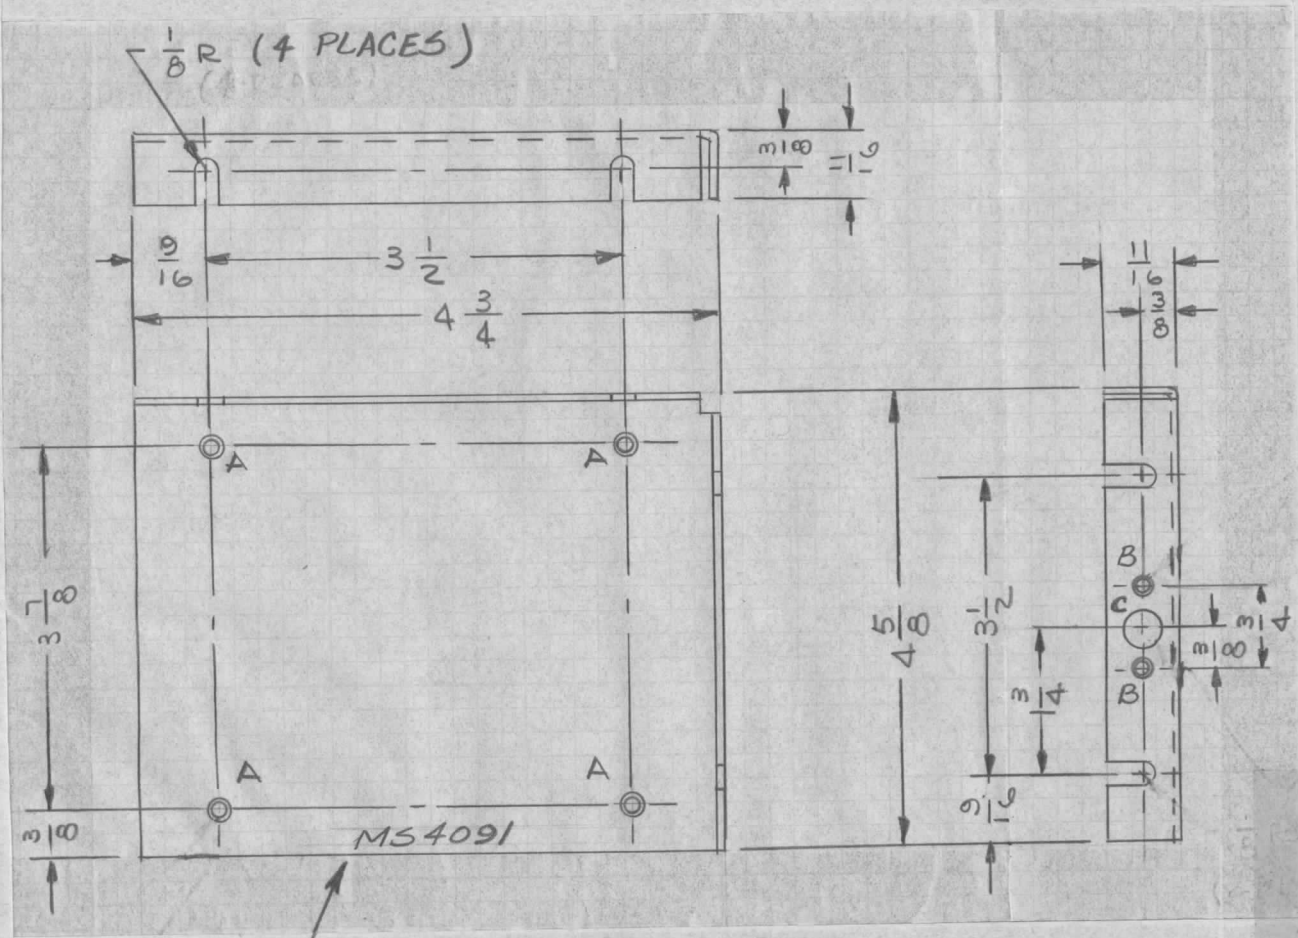

HOLE	DESCRIPTION	REQ
A	3/16 DIA, C'SINK 82° TO .337 DIA	4
B	.104 DIA., C'SINK 82° TO .204 DIA.	2
C	3/8 DIA.	1

PART NO.	DESCRIPTION	ASSY NO.
MS4091-1	AS SHOWN	A4122
MS4091-2	OPPOSITE HAND	A4123

METAL STAMP TMC PART NO W/LATEST REVISION LETTER 1/8 HIGH GOTHIC.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-8-65	Ø	J.L.		
X1	REDRAWN (NO CHANGES)	1-22-65	X1		J.M.	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		EATON		

.081 THK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

— HEAT TREAT. SPEC.

5404 YEL. IRIDITE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

PLATE, END - PC CARD BIN

DRAWN	CHECKED	FINAL APPROVAL
F. E. Eaton 2/8/65	W. JORDAN 2/8/65	MS4091 Ø
ELEC. DES. APP.	MECH. DES. APP.	

REPROVEL NO. 440H 21540

TMC FORM 108-A