


NOTE:

REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			MS4113	A
	MODEL	ASS'Y. NO.	DATE		
1	TTR-10	AX418	10.28.64		

HOLE	DESCRIPTION	REQ
A	5/32 DIA	4
B	3/8 DIA	1
C	3/16 DIA	1

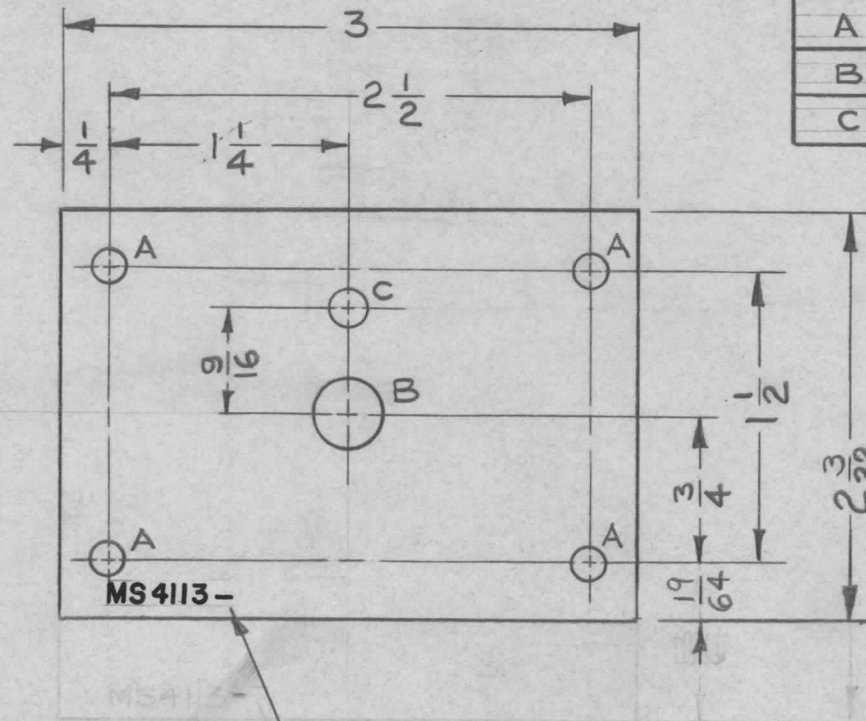

METAL STAMP TMC P/N
1/8 HIGH GOTHIC WITH
LATEST REV. LETTER

REF: LD1644

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	O. POSE	DESCRIPTION	SYMBOL	
A	2 3/32 WAS 2 5/8, 1/4 WAS 5/64	8-4-65	14602	REV	JCB	MM						
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-28-64	Ø	JL				.064 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	A	
X	EXPER. RELEASE	12.9.64	X	JB				ALUMINUM				
								5052-H32				
								S404 YELL. IRIDITE				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE					
							1:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE				
TOLERANCES							A					
							5052-H32		DRAWN	CHECKED	FINAL APPROVAL	
							TYPE & TEMPER	HEAT TREAT. SPEC.				
							S404 YELL. IRIDITE					
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			
											MS4113	A