
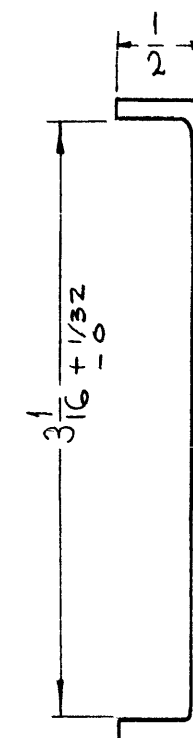


HOLE	DESCRIPTION	REQ.
A	15/64 DIA.	8

MS4129

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPERIMENTAL RELEASE	11-5-64	X	SRG	
Ø	ORIGINAL RELEASE FOR PRODUCTION	11-17-64	Ø	SRG	

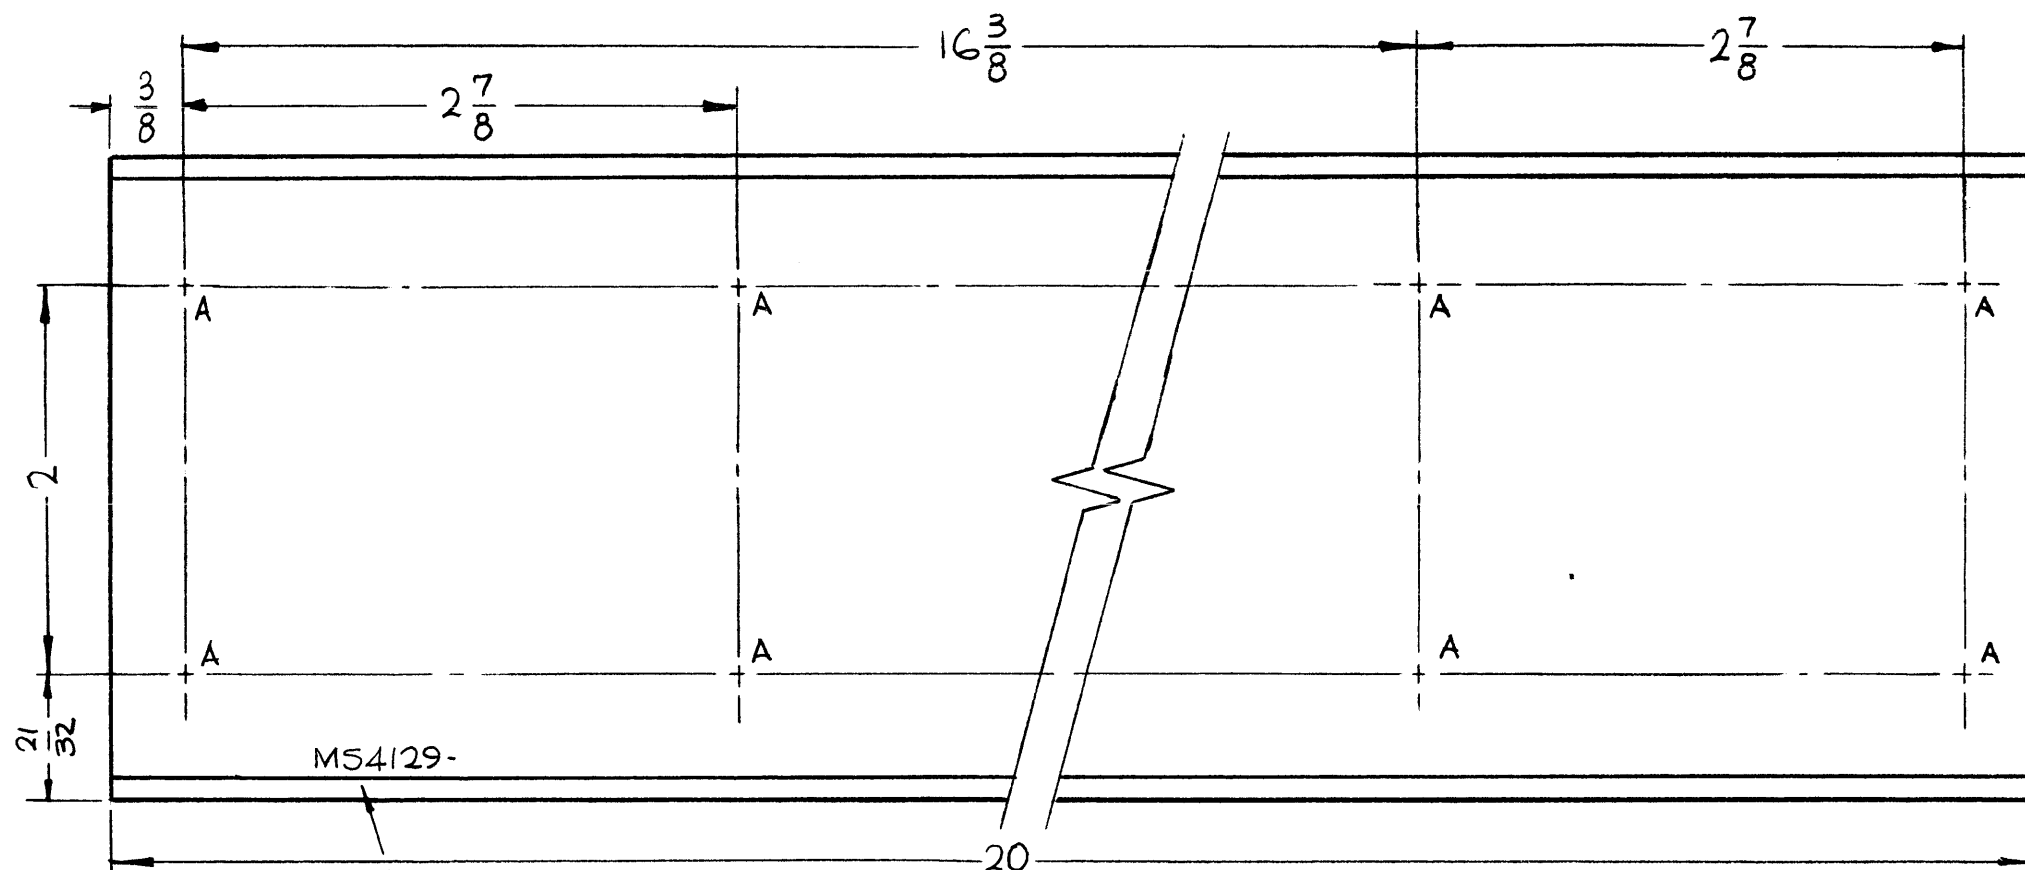

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

NOTES

1	COPA-2	A 4017
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	M. STURMER		LIST OF MATERIAL	
	MATERIAL	1/8 THICK ALUMINUM 5052-H32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	FINISH	S404 YELLOW IRIDITE	TITLE	SUPPORT, FILTER
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	SRG
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		DATE	11-5-64
	FRACTIONS ± 1/64 ANGLES ± 0° 30'		CHECKED	@
	TOLERANCES		DATE	11-16-64
			ELECT. DES.	
			MECH. DES.	
			DATE	11-16-64
			FINAL APPROVAL	SRG
			DATE	
			SHEET	MS4129
			REV. LTR.	Ø