


MS4146

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPERIMENTAL RELEASE	11-19-64	X	SRG	
X	"B" HOLE DIA. WAS ".191-194"; ON B/M IT.#1 WAS NT129-632-4; ON TITLE "INTERCONNECT MODULE" WAS "JUMPER BOARD."	11-23-64	X	J.F.	
Ø	ORIGINAL RELEASE FOR PRODUCTION	11-25-64	Ø	@	

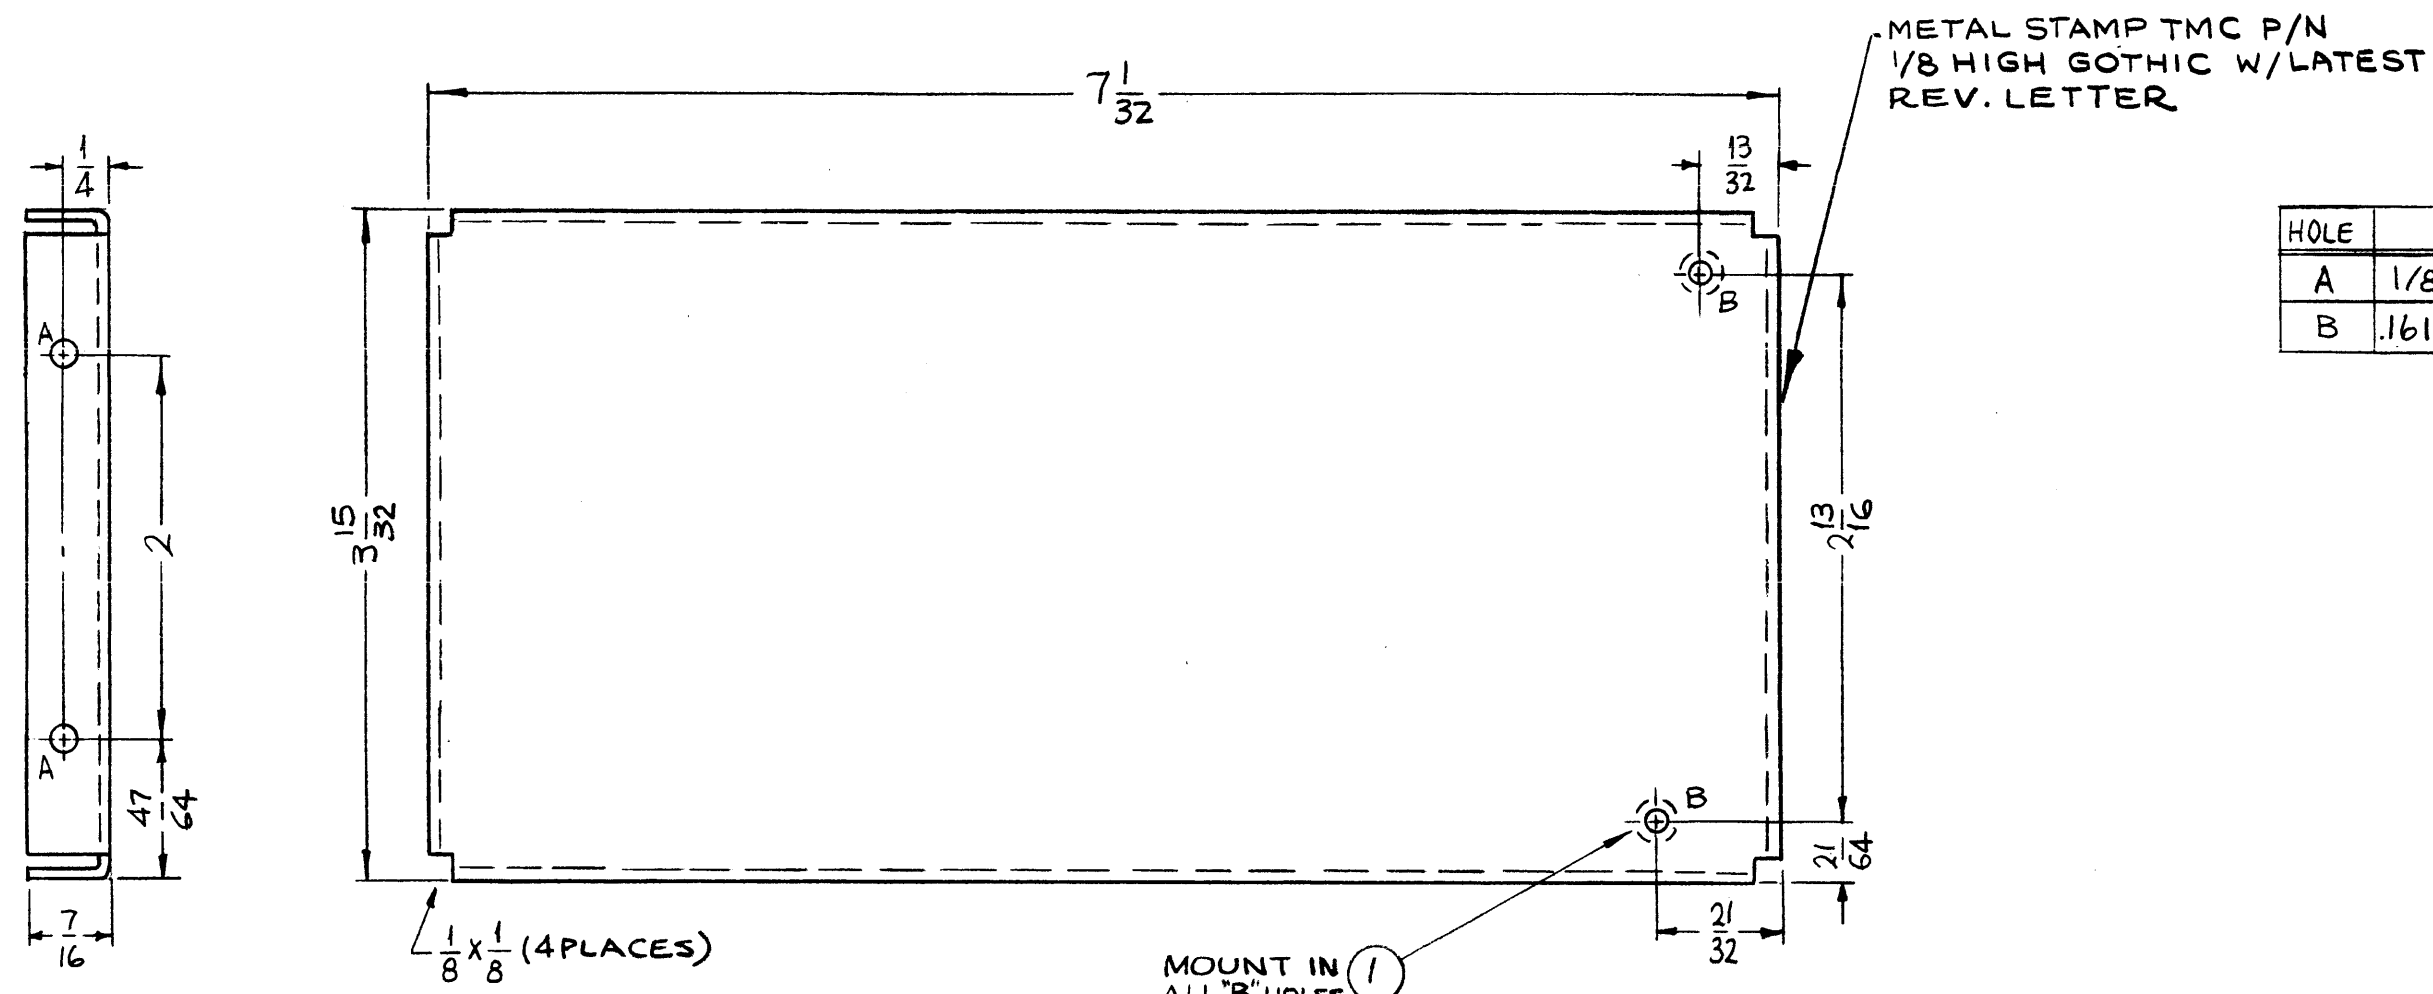

HOLE	DESCRIPTION	REQ
A	1/8 DIA.	2
B	.161-164 DIA.	2

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

NOTES

PFCB-1		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REF: LD1663-

2	1	NT129-440-4	NUT, PLAIN, SPLINE	B
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

LIST OF MATERIAL

MATERIAL .064 THICK ALUMINUM 5052-H32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH S404 YELLOW IRIDITE	TITLE BRACKET MTG. (INTERCONNECT MODULE)			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN SRG	DATE 11-19-64	FINAL APPROVAL RAT	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DEC. MECH.	DATE 11-25-64
			MS4146	Ø
			SHEET	REV. LTR.